

LED Wallpack Retrofits

60WP/LED/850/LS EX39 G3 BB 3/1

Philips LED HID replacement lamps are perfect LED replacement for a variety of outdoor applications. High intensity illumination, which means you get added visibility for applications like streets, public areas, and much more for a fraction of the energy used by conventional HID.

Product data


General information		Wattage Equivalent	
Cap-Base	EX39 [Exclusionary Mogul Screw]		250 W
EU RoHS compliant	Yes	Starting Time (Nom)	1 s
Nominal Lifetime (Nom)	50000 h	Warm Up Time to 60% Light (Nom)	1 s
Switching Cycle	50000X	UL Type	Type B - bypass the ballast
		Power Factor (Nom)	0.9
		Voltage (Nom)	100-277 V
Light technical		Temperature	
Color Code	850 [CCT of 5000K]	T-Case Maximum (Nom)	65 °C
Luminous Flux (Nom)	9000 lm		
Color Designation	Daylight	Controls and dimming	
Correlated Color Temperature (Nom)	5000 K	Dimmable	Preset Dimming
Luminous Efficacy (rated) (Nom)	150.00 lm/W		
Color Consistency	ANSI 5000K quadrangle	Mechanical and housing	
Color Rendering Index (Nom)	80	Bulb Finish	Clear
LLMF At End Of Nominal Lifetime (Nom)	70 %	Bulb Shape	Wall Pack
Operating and electrical		Product data	
Input Frequency	50 to 60 Hz	Order product name	60WP/LED/850/LS EX39 G3 BB 3/1
Power (Nom)	60 W	EAN/UPC - Product	046677564292
Lamp Current (Nom)	666 mA		

LED Wallpack Retrofits

Order code	929003000404
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	3
Material Nr. (12NC)	929003000404

Net Weight (Piece)	0.936 kg
--------------------	----------


Dimensional drawing

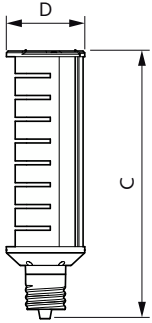


60WP/LED/850/LS EX39 G3 BB 3/1

Product	D	C
60WP/LED/850/LS EX39 G3 BB 3/1	92 mm	270 mm


Photometric data

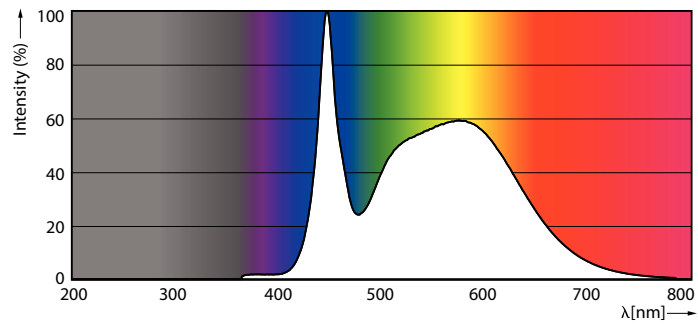

LEDTForce LS EX39 60W WallPack EX39 850-POC



LEDTForce LS EX39 40W WallPack EX39-LDD




LEDTForce LS EX39 60W WallPack EX39 850-GUL

LEDTForce LS EX39 60W WallPack EX39 850-GUL

LED Wallpack Retrofits

Lifetime

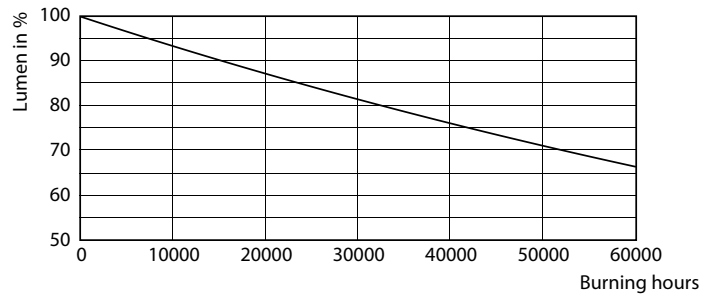

50K

50K

