



# MASTER Value Glass LED bulbs

## MASTER VLELEDBulbDT3.4-40WB22 927A60CL G UK

Featuring a classic heritage design, these filament LED bulbs combine the familiar shapes of incandescent bulbs with the benefits of long-lasting LED technology. These MASTER Value Glass LED bulbs offer more energy savings than normal glass LED bulbs. At the same time, they also provide customers with good light experience, enhanced by excellent dimming performance (dimnable glass LED bulbs). MASTER Value Glass LED Bulbs deliver significant energy savings, using 30% less energy compared to normal LED bulbs and provide excellent quality of light. By offering a lifetime of 15,000 hours, these dimmable LED bulbs also reduce maintenance costs.

### Product data

| General information                |                               |
|------------------------------------|-------------------------------|
| Cap-Base                           | B22 [ B22]                    |
| EU RoHS compliant                  | Yes                           |
| Nominal Lifetime (Nom)             | 15000 h                       |
| Switching Cycle                    | 20000X                        |
| Light technical                    |                               |
| Color Code                         | 922-927 [ CCT of 2200K-2700K] |
| Luminous Flux (Nom)                | 470 lm                        |
| Color Designation                  | Warm Glow(WG)                 |
| Correlated Color Temperature (Nom) | 2200 2700 K                   |
| Luminous Efficacy (rated) (Nom)    | 138.00 lm/W                   |
| Color Consistency                  | <6                            |
| Color Rendering Index (Nom)        | 90                            |

| LLMF At End Of Nominal Lifetime (Nom) 70 % |             |
|--------------------------------------------|-------------|
| Operating and electrical                   |             |
| Input Frequency                            | 50 to 60 Hz |
| Power (Nom)                                | 3.4 W       |
| Lamp Current (Nom)                         | 24 mA       |
| Wattage Equivalent                         | 40 W        |
| Starting Time (Nom)                        | 0.5 s       |
| Warm Up Time to 60% Light (Nom)            | 0.5 s       |
| Power Factor (Nom)                         | 0.6         |
| Voltage (Nom)                              | 220-240 V   |

# MASTER Value Glass LED bulbs

## Temperature

|                      |       |
|----------------------|-------|
| T-Case Maximum (Nom) | 70 °C |
|----------------------|-------|

## Controls and dimming

|          |     |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

## Mechanical and housing

|             |               |
|-------------|---------------|
| Bulb Finish | Clear         |
| Bulb Shape  | A60 [ A 60mm] |


## Approval and application

|                               |        |
|-------------------------------|--------|
| Energy Efficiency Class       | D      |
| Energy Consumption kWh/1000 h | 4 kWh  |
| EPREL Registration Number     | 453244 |

## Product data

|                                 |                                                |
|---------------------------------|------------------------------------------------|
| Full product code               | 871951432469501                                |
| Order product name              | MASTER VLELEDBulbDT3.4-40WB22<br>927A60CL G UK |
| EAN/UPC - Product               | 8719514324695                                  |
| Order code                      | 929003010199                                   |
| Numerator - Quantity Per Pack   | 1                                              |
| Numerator - Packs per outer box | 10                                             |
| Material Nr. (12NC)             | 929003010199                                   |
| Net Weight (Piece)              | 0.030 kg                                       |


## Dimensional drawing




MASTER VLELEDBulbDT3.4-40WB22 927A60CL G UK

| Product                                     | D     | C      |
|---------------------------------------------|-------|--------|
| MASTER VLELEDBulbDT3.4-40WB22 927A60CL G UK | 60 mm | 103 mm |

## Photometric data

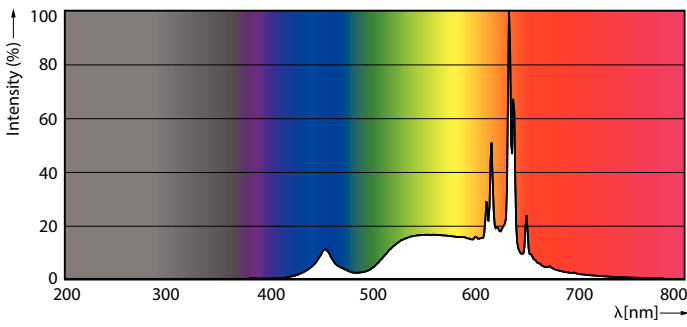

LEDbulb MAS SLR 3,4W A60 E27 927 CL-POC



LEDbulb MAS SLR A60 3,4W E27 927 CL-LDD

