

MASTER Value Glass LED bulbs

MASTER VLE LEDBulb DT5.9-60W B22 927A60CL G

Featuring a classic heritage design, these filament LED bulbs combine the familiar shapes of incandescent bulbs with the benefits of long-lasting LED technology. These MASTER Value Glass LED bulbs offer more energy savings than normal glass LED bulbs. At the same time, they also provide customers with good light experience, enhanced by excellent dimming performance (dimmable glass LED bulbs). MASTER Value Glass LED Bulbs deliver significant energy savings, using 30% less energy compared to normal LED bulbs and provide excellent quality of light. By offering a lifetime of 15,000 hours, these dimmable LED bulbs also reduce maintenance costs.

Product data

| General information | | Color Rendering Index (Nom) | |
|------------------------------------|-------------------------------|--|-------------|
| Cap-Base | B22 [B22] | | 90 |
| EU RoHS compliant | Yes | LLMF At End Of Nominal Lifetime (Nom) 70 % | |
| Nominal Lifetime (Nom) | 15000 h | Operating and electrical | |
| Switching Cycle | 20000X | Input Frequency | 50 to 60 Hz |
| Flux measurement reference | Sphere | Power (Nom) | 5.9 W |
| | | Lamp Current (Nom) | 40 mA |
| Light technical | | Wattage Equivalent | 60 W |
| Color Code | 922-927 [CCT of 2200K-2700K] | Starting Time (Nom) | 0.5 s |
| Luminous Flux (Nom) | 806 lm | Warm Up Time to 60% Light (Nom) | 0.5 s |
| Color Designation | Warm Glow(WG) | Power Factor (Nom) | 0.6 |
| Correlated Color Temperature (Nom) | 2200 2700 K | Voltage (Nom) | 220-240 V |
| Luminous Efficacy (rated) (Nom) | 136.00 lm/W | | |
| Color Consistency | <6 | | |

MASTER Value Glass LED bulbs

Temperature

| | |
|----------------------|-------|
| T-Case Maximum (Nom) | 70 °C |
|----------------------|-------|

Controls and dimming

| | |
|----------|----------------------------|
| Dimmable | Only with specific dimmers |
|----------|----------------------------|

Mechanical and housing

| | |
|-------------|---------------|
| Bulb Finish | Clear |
| Bulb Shape | A60 [A 60mm] |


Approval and application

| | |
|-------------------------------|--------|
| Energy Efficiency Class | D |
| Energy Consumption kWh/1000 h | 6 kWh |
| EPREL Registration Number | 453248 |

Product data

| | |
|---------------------------------|---|
| Full product code | 871951432477000 |
| Order product name | MASTER VLE LEDBulb DT5.9-60W B22 927A60CL G |
| EAN/UPC - Product | 8719514324770 |
| Order code | 929003010502 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 929003010502 |
| Net Weight (Piece) | 0.030 kg |


Dimensional drawing




MASTER VLE LEDBulb DT5.9-60W B22 927A60CL G

| Product | D | C |
|---|-------|--------|
| MASTER VLE LEDBulb DT5.9-60W B22 927A60CL G | 60 mm | 103 mm |

Photometric data

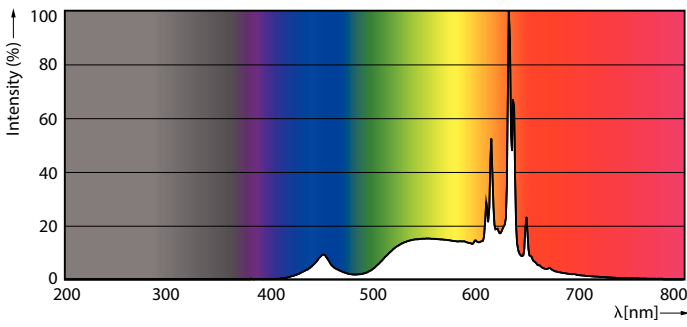


LEDbulb MAS SLR 5,9W A60 E27 927 CL-POC



LEDbulb MAS SLR A60 5,9W E27 927 CL-LDD

MASTER Value Glass LED bulbs

Photometric data




© Philips Lighting B.V. 2021. Philips Lighting B.V. Page 1/1

LEDbulb MAS SLR 5,9W A60 B22 927 CL-GUL

Lifetime



Life Expectancy Diagram

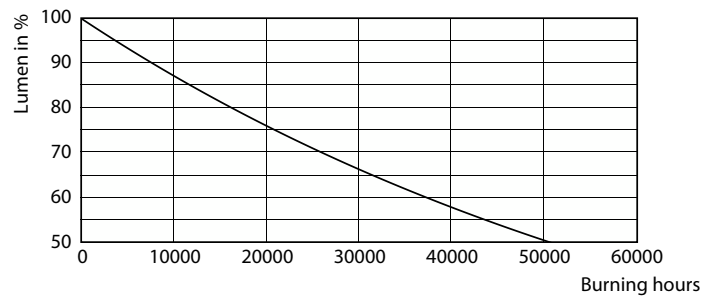

Lumen Maintenance Diagram

