

MASTER Value GLASS LED candles and lusters

MASTER VLE LEDCandleDT3.4-40W B22 927B35CLG

MASTER Value Glass LED lusters features a classic heritage design, these filament LED lamps combine the familiar shapes of incandescent candles and lusters with the benefits of long-lasting LED technology. These glass LED lusters offer more energy savings than normal LED candles and lusters. At the same time, they also provide customers with a good light experience, enhanced by excellent dimming performance (dimmable LED candles). MASTER Value Glass LED lusters and lusters deliver significant energy savings, using 30% less energy compared to normal glass LED candles and provide excellent quality of light. By offering a lifetime of 15,000 hours these dimmable LED candles and lusters also reduce maintenance costs.

Product data

| General information | |
|------------------------------------|-------------------------------|
| Cap-Base | B22 [B22] |
| EU RoHS compliant | Yes |
| Nominal Lifetime (Nom) | 15000 h |
| Switching Cycle | 20000X |
| Flux measurement reference | Sphere |
| Light technical | |
| Color Code | 922-927 [CCT of 2200K-2700K] |
| Luminous Flux (Nom) | 470 lm |
| Color Designation | Warm Glow(WG) |
| Correlated Color Temperature (Nom) | 2200 2700 K |

| Luminous Efficacy (rated) (Nom) | 138.00 lm/W |
|---------------------------------------|-------------|
| Color Consistency | <6 |
| Color Rendering Index (Nom) | 90 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Operating and electrical | |
| Input Frequency | 50 to 60 Hz |
| Power (Nom) | 3.4 W |
| Lamp Current (Nom) | 24 mA |
| Wattage Equivalent | 40 W |
| Starting Time (Nom) | 0.5 s |
| Warm Up Time to 60% Light (Nom) | 0.5 s |

MSTER Value GLASS LED candles and lusters

| | |
|--------------------|-----------|
| Power Factor (Nom) | 0.6 |
| Voltage (Nom) | 220-240 V |

Temperature

| | |
|----------------------|-------|
| T-Case Maximum (Nom) | 70 °C |
|----------------------|-------|

Controls and dimming

| | |
|----------|----------------------------|
| Dimmable | Only with specific dimmers |
|----------|----------------------------|

Mechanical and housing

| | |
|-------------|---------------|
| Bulb Finish | Clear |
| Bulb Shape | B35 [B 35mm] |

Approval and application


| | |
|-------------------------|---|
| Energy Efficiency Class | D |
|-------------------------|---|

| | |
|-------------------------------|--------|
| Energy Consumption kWh/1000 h | 4 kWh |
| EPREL Registration Number | 453267 |

Product data

| | |
|---------------------------------|-----------------------------------|
| Full product code | 871951432515900 |
| Order product name | MASTER VLE LEDCandleDT3.4-40W B22 |
| | 927B35CLG |
| EAN/UPC - Product | 8719514325159 |
| Order code | 929003012402 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 929003012402 |
| Net Weight (Piece) | 0.014 kg |


Dimensional drawing

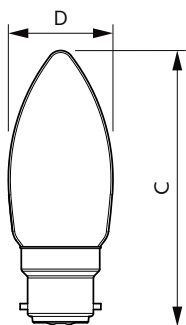


MASTER VLE LEDCandleDT3.4-40W B22 927B35CLG

| Product | D | C |
|---|-------|-------|
| MASTER VLE LEDCandleDT3.4-40W B22 927B35CLG | 35 mm | 94 mm |

Photometric data




LEDcandle MAS SLR B35 3,4W E14 927 CL-LDD



LEDcandle MAS SLR 3,4W B35 B22 927 CL-GUL


MSTER Value GLASS LED candles and lusters

Photometric data

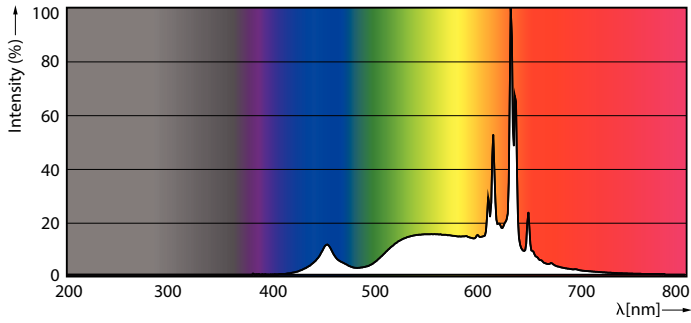


LEDcandle MAS SLR 3,4W B35 E14 927 CL-POC

Lifetime

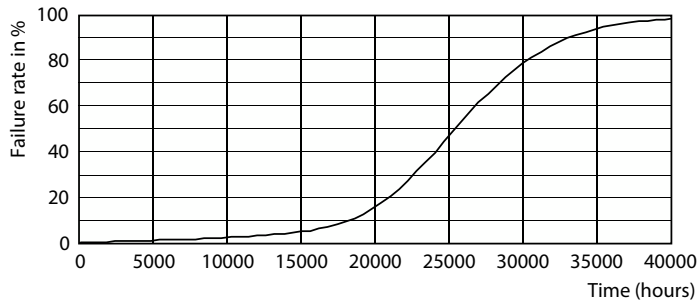

Life Expectancy Diagram

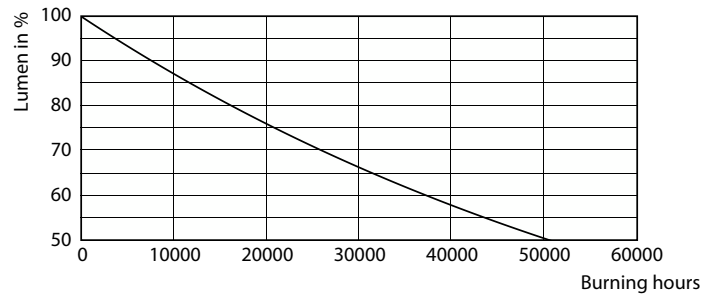

Lumen Maintenance Diagram

