



LED B11

5B11/PER/CRI95WG/FR/G/E12/WGD 1CT T20

Philips LED B11 candles offer energy saving ambiance with the elegant effect of incandescent candles. These designs provides light in an omnidirectional manner, giving lighting designers a long life alternative to standard incandescent sources.


Product data

General information	
Cap-Base	E12 [Candelabra Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Light technical	
Color Code	927-922 [CCT of 2700K-2200K]
Beam Angle (Nom)	300 °
Luminous Flux (Nom)	500 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	2700 2200 K
Luminous Efficacy (rated) (Nom)	100.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	95
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	60 Hz
Power (Nom)	5 W
Lamp Current (Nom)	55 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s

Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Controls and dimming	
Dimmable	Only with specific dimmers
Mechanical and housing	
Bulb Finish	Frosted
Bulb Material	Glass
Bulb Shape	B11
Approval and application	
Energy Certifications	Energy Star
Product data	
Order product name	5B11/PER/CRI95WG/FR/G/E12/WGD 1CT T20
EAN/UPC - Product	046677575199
Order code	929003082504
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929003082504
Net Weight (Piece)	0.016 kg

LED B11


Dimensional drawing




5B11/PER/CRI95WG/FR/G/E12/WGD 1CT T20

Product	D	C
5B11/PER/CRI95WG/FR/G/E12/WGD 1CT T20	35 mm	97 mm


Photometric data



LEDbulb NAM B11 5W E12 927 FR-LDD




LEDbulb NAM 5W B11 E12 927 FR-GUL

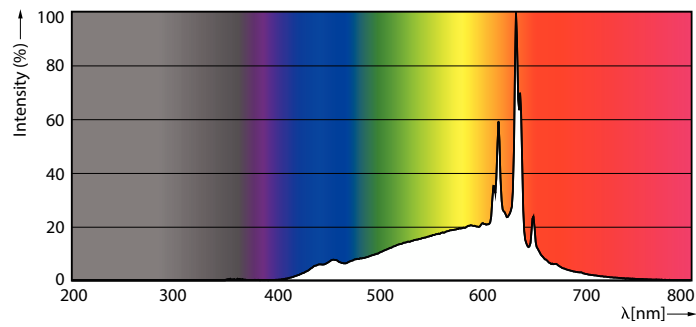

LEDbulb NAM 5W B11 E12 927 FR-POC

LED B11

Lifetime

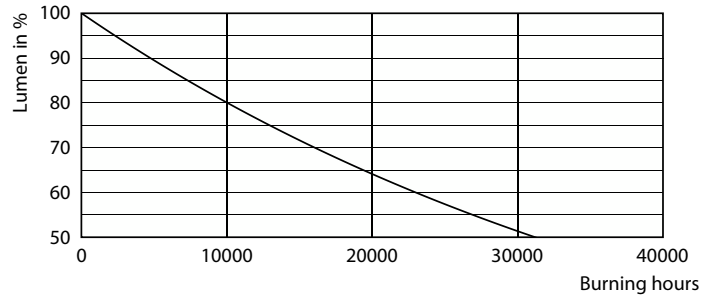

Life Expectancy Diagram

Lumen Maintenance Diagram

