PHILIPS Lighting

Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL MINI 15W/10 /10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information		Operating and electrical		
Cap-Base	G5 [G5]	Power (Nom)	15 W	
Main Application	Insect traps	Lamp Current (Nom)	0.40 A	
Useful Life (Max)	1000 h	Voltage (Nom)	43 V	
Light technical		Mechanical and housing		
Color Code	10	Bulb Shape	T16	
Color Designation	Actinic			
UV Depreciation at 500 h	30 %	UV		
UV Depreciation at 1000 h	40 %	UV-B/UV-A (IEC)	0.2 %	
UV Depreciation at 2000 h	45 %	UV-A Radiation 100Hr (IEC)	3 W	


Actinic BL TL(-K) / TL-D(-K)

Product data				
Full product code	871150095148927			
Order product name	Actinic BL TL MINI 15W/10 /10X25CC			
EAN/UPC - Product	8711500951489			
Order code	928001201030			
Numerator - Quantity Per Pack	1			

Numerator - Packs per outer box	250		
Material Nr. (12NC)	928001201030		
Net Weight (Piece)	25.300 g		


Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL MINI	16 mm	288.3 mm	295.4 mm	293.0 mm	302.5 mm
15W/10 /10X25CC					



Actinic BL TL MINI 15W/10 /10X25CC

Photometric data

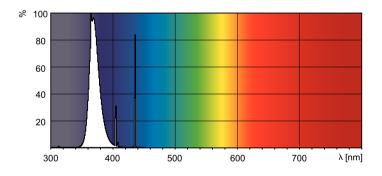

XDPB_XUBTL_10-Spectral power distribution B/W

XDPO_XUBTL_10-Spectral power distribution Colour



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2022, January 14 - data subject to change