



MASTER SON PIA Plus

MASTER SON PIA Plus 100W/220 E40 1SL/12

High Pressure Sodium lamp with opalized ovoid outer bulb, high output and long reliable lifetime

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap-Base	E40 [E40]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	17000 h
Life To 10% Failures (Nom)	21000 h
Life to 20% Failures (Nom)	25000 h
Life to 50% Failures (Nom)	29000 h
System Description	External Ignitor
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	97 %
LSF 20000 h Rated	91 %
Flux measurement reference	Sphere


Light technical	
Color Code	220 [CCT of 2000K]
Luminous Flux (Nom)	9600 lm
Luminous Flux (Rated) (Nom)	9600 lm
Chromaticity Coordinate X (Nom)	0.535
Chromaticity Coordinate Y (Nom)	0.42
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	95 lm/W
Color Rendering Index (Max)	25
Color Rendering Index (Nom)	-
LLMF 2000 h Rated	98 %
LLMF 4000 h Rated	96 %
LLMF 6000 h Rated	95 %
LLMF 8000 h Rated	94 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	90 %
LLMF 20000 h Rated	89 %

MASTER SON PIA Plus

Ratio Scotopic/Photopic Lumens	0.55
Operating and electrical	
Power (Nom)	101.0 W
Lamp Current (EM) (Nom)	0.119 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	2800 V
Re-Ignition Time (Min) (Max)	120 s
Ignition Time (Max)	5 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	100 V
Controls and dimming	
Dimmable	Yes
Run-Up Time 90% (Max)	4 min
Mechanical and housing	
Bulb Finish	Coated glass
Bulb Shape	B75 [B 75mm]
Approval and application	
Energy Efficiency Class	F

Mercury (Hg) Content (Max)	16.3 mg
Mercury (Hg) Content (Nom)	16.3 mg
Energy Consumption kWh/1000 h	101 kWh
EPREL Registration Number	473388
Luminaire design requirements	
Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Max)	200 °C
Product data	
Full product code	871150018225815
Order product name	MASTER SON PIA Plus 100W/220 E40 1SL/12
EAN/UPC - Product	8711500182258
Order code	928151608827
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928151608827
Net Weight (Piece)	0.125 kg
ILCOS Code	SE-100-H/S-E40

Dimensional drawing




MASTER SON PIA Plus 100W/220 E40 1SL/12


Product	D (max)	C (max)
MASTER SON PIA Plus 100W/220 E40 1SL/12	76 mm	186 mm

MASTER SON PIA Plus

Photometric data

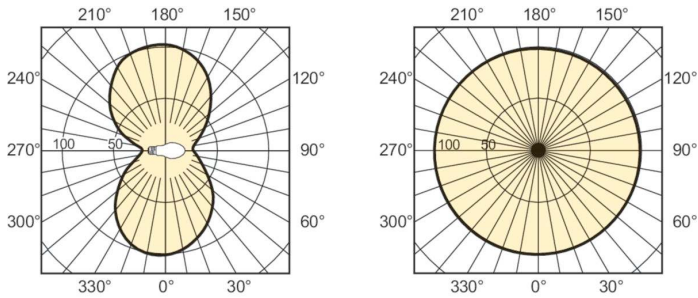


LDLD_SON-PIA_0001-Light distribution diagram

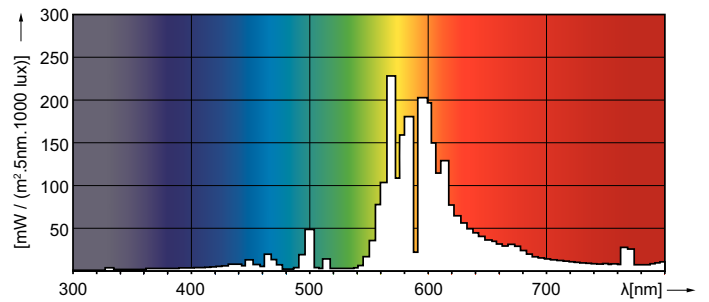


LDPO_SON-PIA_0001-Spectral power distribution Colour

Lifetime

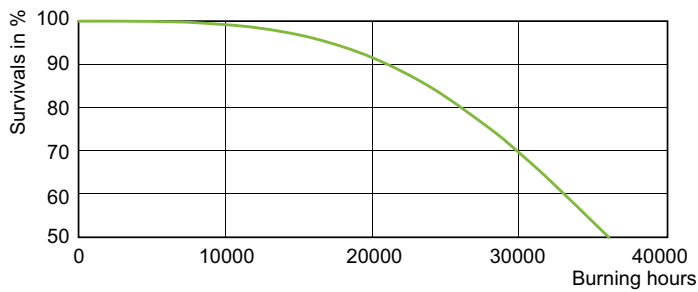

LDLE_SON-PIA_0002-Life expectancy diagram

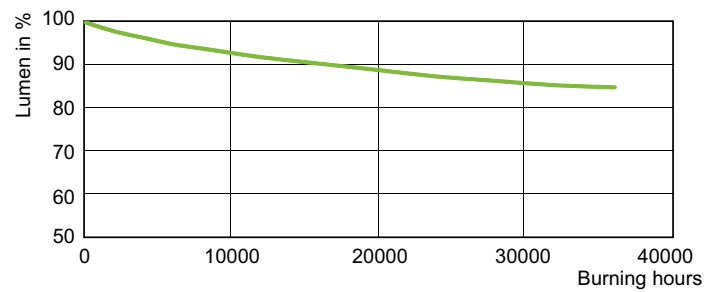

LDLM_SON-PIA_0005-Lumen maintenance diagram

