



MSR Gold™ SA Double Ended

MSR Gold™ 1510 SA/DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information		Luminous Efficacy (rated) (Nom)		93 lm/W
Cap-Base	SFC10-4 [SFC10-4]	Color Rendering Index (Nom)	85	
Operating Position	UNIVERSAL [Any or Universal (U)]	Operating and electrical		
Main Application	Entertainment	Power (Nom)	1510 W	
Life to 50% Failures (Nom)	750 h	Lamp Current (Nom)	13.5 A	
System Description	SA/DE	Ignition Supply Voltage (Min)	198 V	
Light technical		Controls and dimming		
Color Code	- [Not Specified]	Dimmable	Yes	
Luminous Flux (Nom)	140000 lm			
Chromaticity Coordinate X (Nom)	326			
Chromaticity Coordinate Y (Nom)	336			
Correlated Color Temperature (Nom)	6000 K			

MSR Gold™ SA Double Ended

Mechanical and housing	
Cap-Base Information	SFC10-4
Luminaire design requirements	
Bulb Temperature (Max)	950 °C
Pinch Temperature (Max)	450 °C
Product data	
Full product code	871829122113500

Order product name	MSR Gold™ 1510 SA/DE 1CT/4
EAN/UPC - Product	8718291221135
Order code	928176605115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928176605115
Net Weight (Piece)	0.034 kg



Dimensional drawing

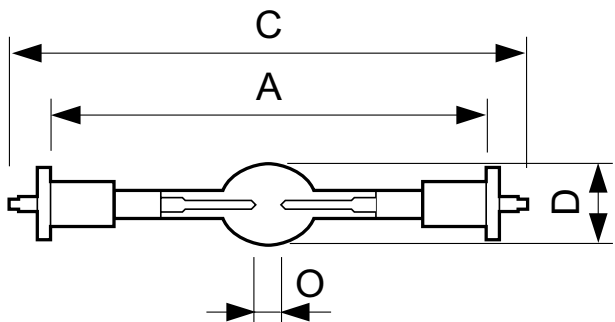

MSR Gold™ 1510 SA/DE 1CT/4

Product	D (max)	O	A	C (max)
MSR Gold™ 1510 SA/DE 1CT/4	23.2 mm	7.0 mm	114.8 mm	136 mm

Photometric data

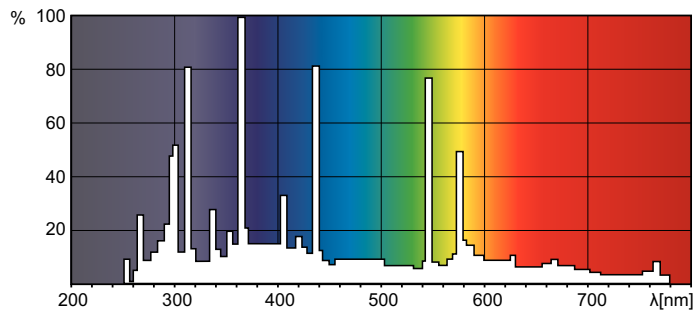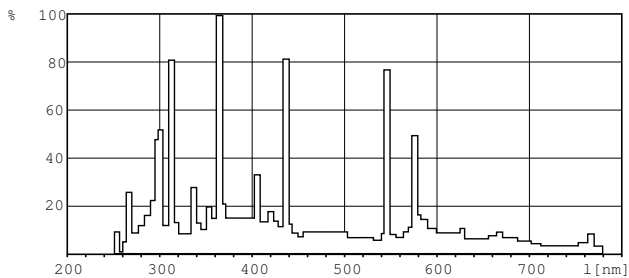

XDPO_XDMSR_SADE-Spectral power distribution Colour

