



# MASTER SON-T PIA Plus



## MASTER SON-T PIA Plus 100W/220 E40 1SL/12

High Pressure Sodium lamp with clear tubular outer bulb, high output and long reliable lifetime

### Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General information	
Cap-Base	E40 [ E40]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Life to 5% Failures (Nom)	17000 h
Life To 10% Failures (Nom)	21000 h
Life to 20% Failures (Nom)	25000 h
Life to 50% Failures (Nom)	29000 h
ANSI Code HID	-
System Description	External Ignitor
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	97 %
LSF 20000 h Rated	91 %

Flux measurement reference	Sphere
Light technical	
Color Code	220 [ CCT of 2000K]
Luminous Flux (Nom)	10600 lm
Luminous Flux (Rated) (Nom)	10600 lm
Chromaticity Coordinate X (Nom)	0.535
Chromaticity Coordinate Y (Nom)	0.42
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	105 lm/W
Color Rendering Index (Max)	25
Color Rendering Index (Nom)	-
LLMF 2000 h Rated	98 %
LLMF 4000 h Rated	96 %
LLMF 6000 h Rated	95 %
LLMF 8000 h Rated	94 %
LLMF 12000 h Rated	92 %

# MASTER SON-T PIA Plus

LLMF 16000 h Rated	90 %
LLMF 20000 h Rated	89 %
Ratio Scotopic/Photopic Lumens	0.55

## Operating and electrical

Lamp supply voltage	230 V [ 230]
Power (Nom)	101.0 W
Lamp Current (EM) (Nom)	0.119 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	2800 V
Re-Ignition Time (Min) (Max)	120 s
Ignition Time (Max)	5 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	100 V

## Controls and dimming

Dimmable	Yes
Run-Up Time 90% (Max)	4 min

## Mechanical and housing

Bulb Finish	Clear
Cap-Base Information	-
Bulb Shape	T46 [ T 46mm]

## Approval and application

Energy Efficiency Class	F
Mercury (Hg) Content (Max)	16.3 mg
Mercury (Hg) Content (Nom)	16.3 mg
Energy Consumption kWh/1000 h	101 kWh
EPREL Registration Number	473389


## Luminaire design requirements

Bulb Temperature (Max)	450 °C
Cap-Base Temperature (Max)	250 °C

## Product data

Full product code	871150019230115
Order product name	MASTER SON-T PIA Plus 100W/220 E40 1SL/12
EAN/UPC - Product	8711500192301
Order code	928151709230
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928151709230
Net Weight (Piece)	0.128 kg
ILCOS Code	ST-100-H/S-E40

## Dimensional drawing


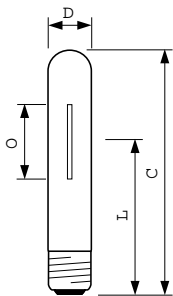


MASTER SON-T PIA Plus 100W/220 E40 1SL/12

Product	D (max)	O	L	C (max)
MASTER SON-T PIA Plus 100W/220 E40 1SL/12	48 mm	47 mm	132 mm	210 mm


# MASTER SON-T PIA Plus

## Photometric data

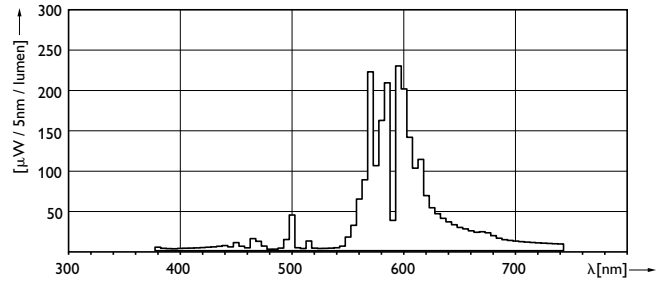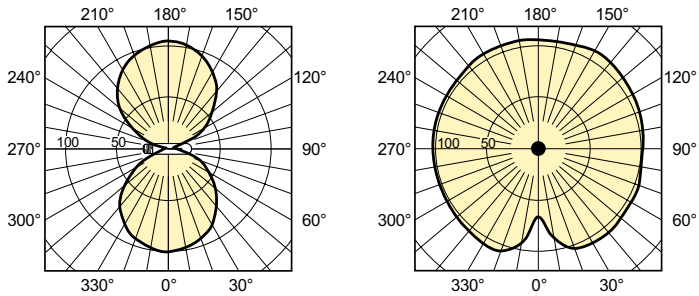


LDLD\_SON-TPIA-Light distribution diagram

LDPB\_SON-TPIA\_0012-Spectral power distribution B/W

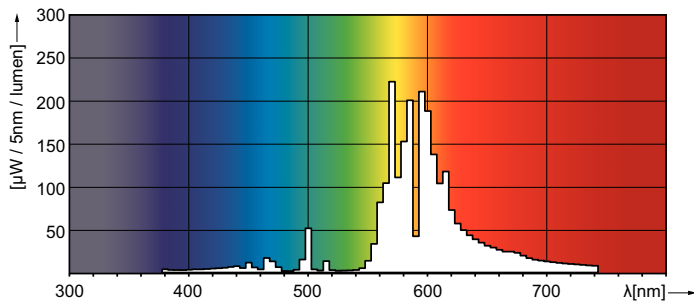


LDPO\_SON-TPIA\_0012-Spectral power distribution Colour

## Lifetime

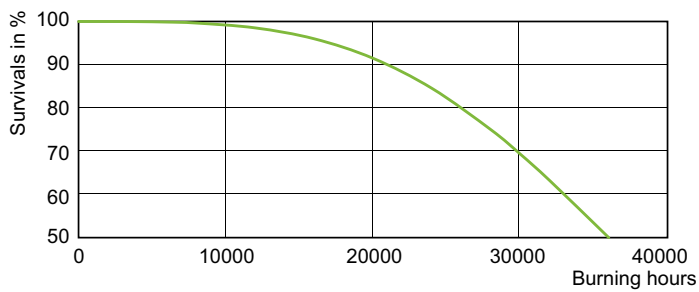

LDLE\_SON-TPIA\_0002-Life expectancy diagram

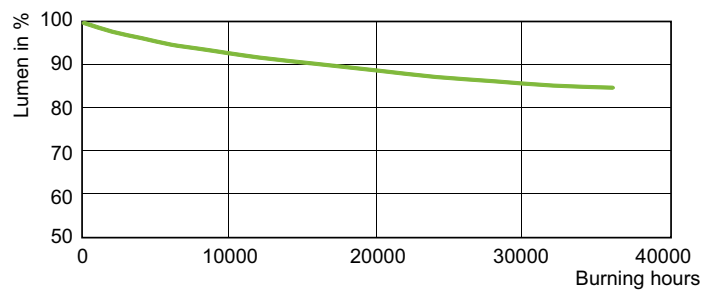

LDLM\_SON-TPIA\_0005-Lumen maintenance diagram

## MASTER SON-T PIA Plus

