

Aquastar T8

F25W/30/Aquastar

0002226



- Features
- Light colour: 10000 Kelvin (simulating the tropical light spectrum)
- Promotes the growth of coral and aquatic plants through natural red and blue sections of the light spectrum
- Excellent lighting performance
- Applications
- For all biological organisms in fresh and marine water aquariums

PRODUCT OVERVIEW

Ordering number	0002226
Colour temperature (K)	10000
Bulb shape	Tubular
Nominal average life (h)	10000
EAN code	5410288022260
Bulb finish	Coated
Cap/Base	G13
Watt (W)	25
Luminous flux (lm)	1500
Type	AquaStar
Lamp Length (mm) - C	756.4
Lamp Diameter (mm) - D	T8
Voltage (V)	84

Aquastar T8

F25W/30/Aquastar

0002226

DATA TABLE

General data

Ordering number	0002226
Nominal average life (h)	10000
Ballast required	Yes
Bulb finish	Coated
Bulb shape	Tubular
EAN code	5410288022260
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
IEC Reference 3	
Cap/Base	G13
Lamp mercury content (mg)	10
Type	AquaStar
Special purpose lamp	Yes
Transformer required	No
Unit case	25
Product name	F25W/30"/Aquastar
Long description	Features Light colour: 10000 Kelvin (simulating the tropical light spectrum) Promotes the growth of coral and aquatic plants through natural red and blue sections of the light spectrum Excellent lighting performance Applications For all biological organisms in fresh and marine water aquariums

Optical data

Colour temperature (K)	10000
Luminous flux (lm)	1500
Rated luminous flux (lm)	1500

Electrical data

Current (A)	0.36
Watt (W)	25
Rated watt (W)	25
Voltage (V)	84


Aquastar T8

F25W/30/Aquastar

0002226

Physical data

Packaging outer height (cm)	15
Packaging single height (cm)	3
Lamp Diameter (mm) - D	T8
Lamp Length (mm) - C	756.4
Packaging outer length (cm)	79
Packaging single length (cm)	75.7
Length base to base (mm) - A	742.2
Length base to pin Min-Max - B	746.9-749.3
Packaging outer width (cm)	16
Packaging single width (cm)	3.2
Diameter (mm)	T8

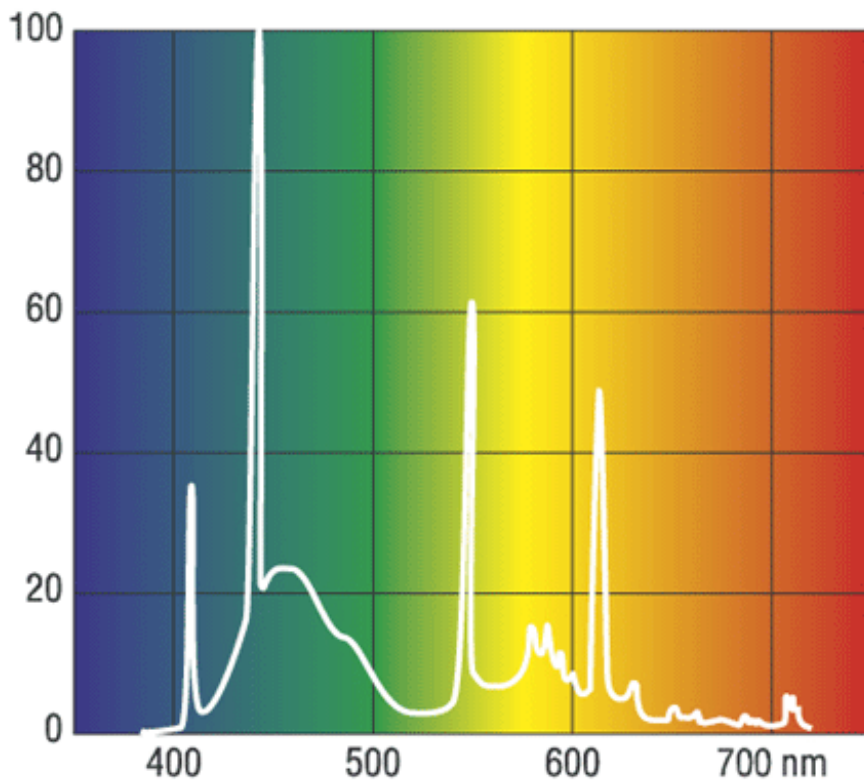

CRI (Ra) = 48
Tc = 10000K



Aquastar T8

F25W/30/Aquastar

0002226

TECHNICAL DRAWINGS

