

Product selected: BA 2500 DE

BriteArc Double Ended lamps are metal halide light sources with excellent performance, specially designed for a wide variety of audio-visual applications. The BriteArc lamps are filled with mercury and rare earth elements to obtain a high efficacy and a stable colour. They can be re-struck at any time with a voltage peak from 25 to 55 kV.

Applications

- Show lighting
- Theatre
- Discotheque lighting
- Follow spots
- Effect lighting
- Studio lighting

Features

- High luminous efficacy
- Low infrared
- Colour stability
- Excellent lumen maintenance
- Physical ruggedness
- Hot restrike

Directions for use

- Burning position: universal for 575W and 1200W
- horizontal plus or minus 30 degrees for 2500W
- horizontal plus or minus 15 degrees for 4000W, 6000W and 12000W
- Only use in closed fixtures
- Can be operated on an electronic power supply or on a magnetic ballast


Product Attributes

Item description	BA 2500 DE
Ordering Code	0023923
EAN code	5410288239231
Packing Quantity	1
Watt. (W)	2500
Volt. (V)	115
Cap	SFa21-12
Max. Over. Length (mm)	355
Diameter (mm)	32
Light output (lm)	240000
Current (A)	25.6
Average life (hours)	500
Repl. Time	750
Colour Temp (K)	5600
CRI	1A
Arc Gap	20.5

Product Image



Line Drawing

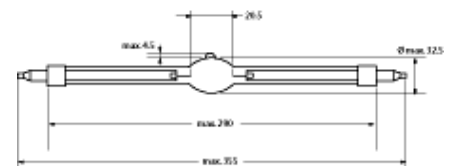

Lamp Cap

SFa21-12



Burning Position