



## Capsuleline 50W GY6.35 12V CL 4000h 1CT

Product family description  
Single-ended low-voltage halogen capsule  
giving crisp white halogen light

### Product Features

- Sturdy, low- pressure lamps with UV- Block glass (IEC 357)
- Gas- filled ( $\leq 2.5$  bar) lamps can be used in luminaires without a front glass in accordance with IEC 598
- Axial filament for higher light output in combination with luminaires and a uniform beam
- Excellent colour rendering
- Universal burning position

### Product Benefits

- Low- pressure technology allows use in luminaires without front glass

### Application


- Task lighting and decorative applications in homes, shops, hotels and restaurants

Product data	
Order code	402172 50
Full product code	871150040217250
Full product name	Capsuleline 50W GY6.35 12V CL 4000h 1CT
Order product name	Caps 50W GY6.35 12V CL 4000h 1CT/10X10F
Packing type	1 Lamp in a Folding Carton
Pieces per pack	1
Packing configuration	10X10F
Packs per outerbox	100
Bar code on pack - EAN1	8711500402172
Bar code on intermediate packing - EAN2	8711500416971
Bar code on outerbox - EAN3	8711500425737
Logistic code(s) - 12NC	9240 402 17104   9240 402 17124
ILCOS code	HSG/C/UB- 50- 12- GY6.35
Net weight per piece	2.300 GR
Successor order code	
Philips Code	13102


Product data	
Cap- Base	GY6.35
Bulb	T11 [T 11mm]
Bulb Finish	Clear
Burning Position	any [Any/Universal]
Rated Lamp Wattage	50W
Voltage	12V
Colour Rendering Index	100 Ra8
Colour Temperature	3000 K
Lamp Luminous Flux	880 Lm



Caps SU GY6.35




Cap- Base GY6.35

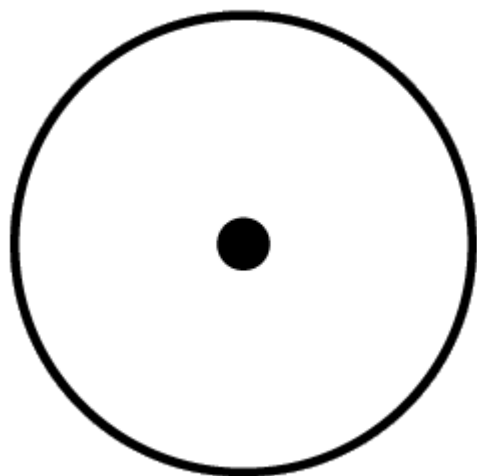

Burning Position any



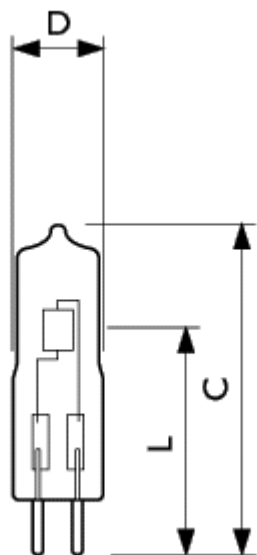

Caps LS/SU GY6.35

	C	D	L
Full product name	Max	Max	Nom
Capsuline 50W GY6.35 12V CL 4000h ICT	44	12	30

