

Aquastar T8

F36W/Aquastar

0002222



Range features

- Features
- Light colour: 10000 Kelvin (simulating the tropical light spectrum)
- Promotes the growth of coral and aquatic plants through natural red and blue sections of the light spectrum
- Excellent lighting performance
- Applications
- For all biological organisms in fresh and marine water aquariums



PRODUCT OVERVIEW

Ordering number	0002222
Lamp shape	Tubular
Lamp finish	Coated
Cap/Base	G13
Type	AquaStar
EAN code	5410288022222
Colour temperature (K)	10000
Useful luminous flux (Rated) (lm)	2200
Watt (Nominal) (W)	36
Voltage (V)	103

Aquastar T8

F36W/Aquastar

0002222

DATA TABLE

General data

Ordering number	0002222
Average life (Nominal) (h)	10000
Lamp shape	Tubular
Lamp finish	Coated
Cap/Base	G13
Type	AquaStar
EAN code	5410288022222
E-number SE	8356654
E-number FI	4943015
Long description	Features. Light colour: 10000 Kelvin (simulating the tropical light spectrum). Promotes the growth of coral and aquatic plants through natural red and blue sections of the light spectrum. Excellent lighting performance. Applications. For all biological organisms in fresh and marine water aquariums
Product name	F36W/Aquastar
Lamp mercury content (mg)	10
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
Special purpose lamp	Yes
Transformer required	No
Sales pack quantity	25

Optical data

Colour temperature (K)	10000
Useful luminous flux (Rated) (lm)	2200
Luminous flux (Nominal) (lm)	2200

Electrical data

Watt (Rated) (W)	36
Watt (Nominal) (W)	36
Voltage (V)	103
Current (A)	0.43

Aquastar T8

F36W/Aquastar

0002222

Physical data


Length base to base (mm) - A	1199.4
Length base to pin Min-Max - B	1204.1-1206.5
Lamp Length (mm) - C/L	1213.6
Lamp Diameter (mm) - D	26
Packaging outer width (cm)	16
Packaging outer length (cm)	125
Packaging outer height (cm)	15
Packaging single width (cm)	3.2
Packaging single height (cm)	3
Packaging single length (cm)	121.4

Aquastar T8

F36W/Aquastar

0002222

PHOTOMETRY

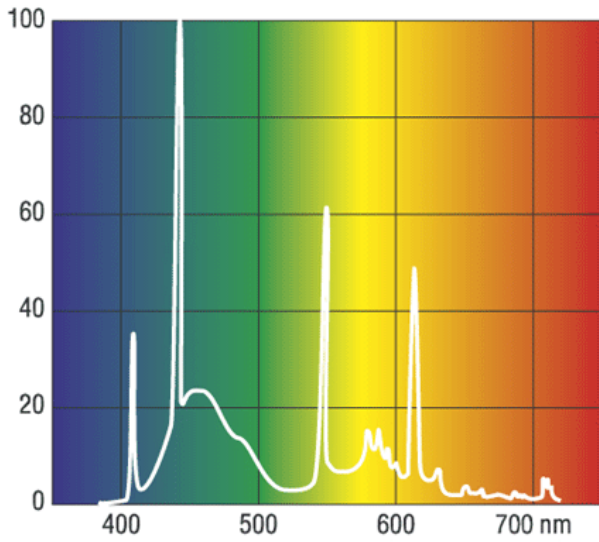

CRI (Ra) = 48
Tc = 10000K

TECHNICAL DRAWINGS

