

Aquastar T8

F58W/Aquastar

0002223



Range features

- Features
- Light colour: 10000 Kelvin (simulating the tropical light spectrum)
- Promotes the growth of coral and aquatic plants through natural red and blue sections of the light spectrum
- Excellent lighting performance
- Applications
- For all biological organisms in fresh and marine water aquariums



PRODUCT OVERVIEW

Ordering number	0002223
Lamp shape	Tubular
Lamp finish	Coated
Cap/Base	G13
Type	AquaStar
EAN code	5410288022239
Colour temperature (K)	10000
Useful luminous flux (Rated) (lm)	3550
Watt (Nominal) (W)	58
Voltage (V)	110

Aquastar T8

F58W/Aquastar

0002223

DATA TABLE

General data

Ordering number	0002223
Average life (Nominal) (h)	10000
Lamp shape	Tubular
Lamp finish	Coated
Cap/Base	G13
Type	AquaStar
EAN code	5410288022239
E-number SE	8356656
E-number FI	4943025
Long description	Features. Light colour: 10000 Kelvin (simulating the tropical light spectrum). Promotes the growth of coral and aquatic plants through natural red and blue sections of the light spectrum. Excellent lighting performance. Applications. For all biological organisms in fresh and marine water aquariums
Product name	F58W/Aquastar
Lamp mercury content (mg)	10
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
Special purpose lamp	Yes
Transformer required	No
Sales pack quantity	25

Optical data

Colour temperature (K)	10000
Useful luminous flux (Rated) (lm)	3550
Luminous flux (Nominal) (lm)	3550

Electrical data

Watt (Rated) (W)	58
Watt (Nominal) (W)	58
Voltage (V)	110
Current (A)	0.67

Aquastar T8

F58W/Aquastar

0002223

Physical data


Length base to base (mm) - A	1500
Length base to pin Min-Max - B	1504.7-1507.1
Lamp Length (mm) - C/L	1514.2
Lamp Diameter (mm) - D	26
Packaging outer width (cm)	16
Packaging outer length (cm)	155
Packaging outer height (cm)	15
Packaging single width (cm)	3.2
Packaging single height (cm)	3
Packaging single length (cm)	151.1

Aquastar T8

F58W/Aquastar

0002223

PHOTOMETRY

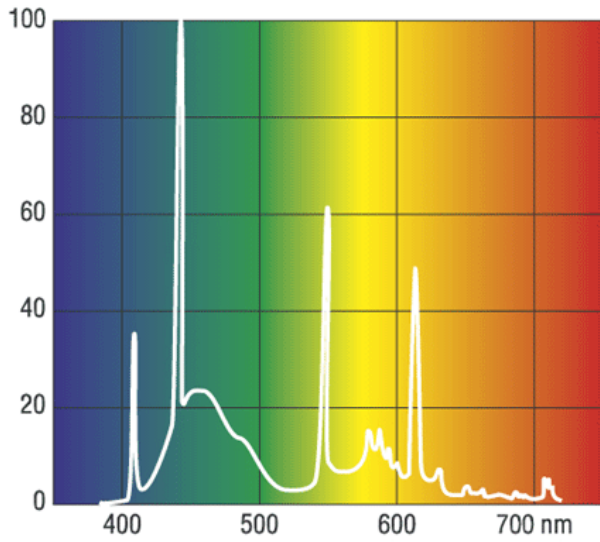

CRI (Ra) = 48
Tc = 10000K

TECHNICAL DRAWINGS

