


# GE Consumer & Industrial Specialty Lighting

- Precisely manufactured, tailored filaments which maximise source brightness giving optimum performance.
- High light-generating efficacy to help minimise power consumption and heat generation.
- Prefocus-type caps or precision rim mounting to position the filament accurately in relation to the associated optics.

## Multi-Mirror® Quartzline® 50W Projection Lamps

### Lamp dimension

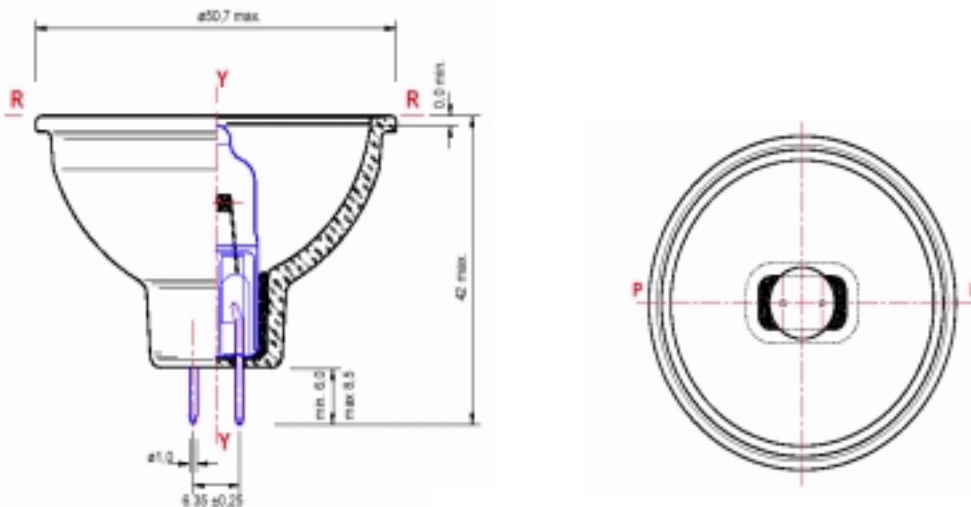

Watt	Volt	ANSI Code	LIF Code	Application	Cap	Dimension		Filament	Working distance	Life (hours)	Pack Qty	Product Code	CCT K
						A	B						
50	8	EFM	A1/229	8mm projection	G26.35	42	50.7	C-6	32	50	50	<b>21276</b>	3300



# MR16 Lamp 50W Technical Data

## Type Approval


Code No.	Voltage	Wattage	Initial fibre luminous flux	Rated Life
21276	8V	50W +8%	430 lm -15%	50 h B50 / 20 h B3

## Measurement Conditions

Ageing	Test-Voltage	Life-Test-Voltage	Measuring position	Life test position	Switching cycle
1 h at test voltage	8V DC	8V AC	horizontal	horizontal	25 min on / 5 min o

## Conditions for use

Permissible burning position	Pinch	Pins	Mirror	Quarz-bulb
Base down $\pm 105^\circ$ (S105)	400 °C max	300 °C max	300 °C max	250 °C min / 900° C max

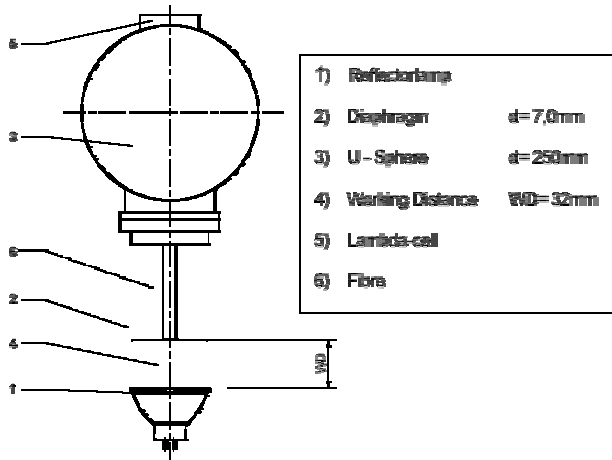

GE Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

MR16 Photo Lamps - Data sheet - May 2005

© General Electric Company (USA) 2004


and General Electric are both registered trademarks of the General Electric Company, USA

# GE Consumer & Industrial Specialty Lighting

- Precisely manufactured, tailored filaments which maximise source brightness giving optimum performance.
- High light-generating efficacy to help minimise power consumption and heat generation.
- Prefocus-type caps or precision rim mounting to position the filament accurately in relation to the associated optics.

## Multi-Mirror® Quartzline® 75W Projection Lamps

### Lamp dimension

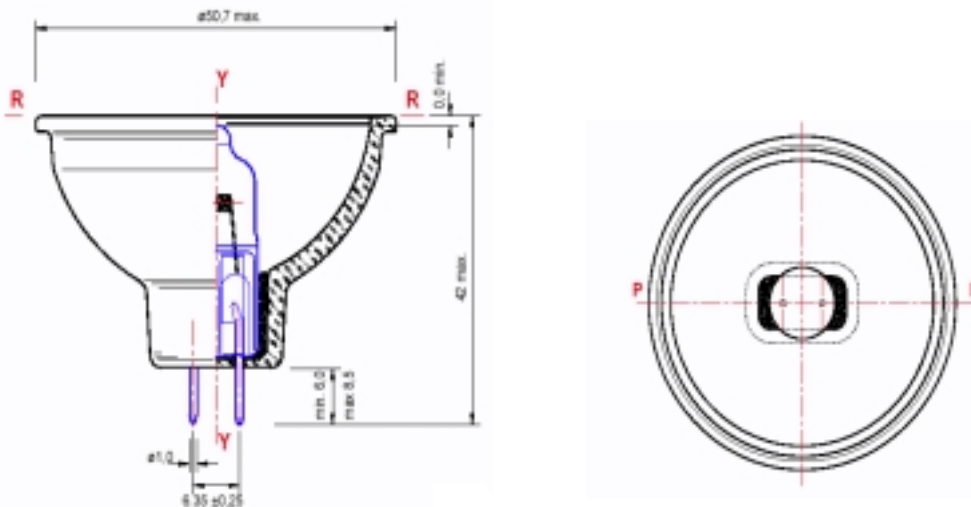

Watt	Volt	ANSI Code	LIF Code	Application	Cap	Dimension		Filament	Working distance	Life (hours)	Pack Qty	Product Code	CCT K
						A	B						
75	12	EFN	A1/230	8mm projection	GZ6.35	42	50.7	CC-6	32	50	50	21277	3350



# MR16 Lamp 70W Technical Data

## Type Approval


Code No.	Voltage	Wattage	Initial fibre luminous flux	Rated Life
21277	12V	70W +8%	600 lm -15%	50 h B50 / 20 h B3

## Measurement Conditions

Ageing	Test-Voltage	Life-Test-Voltage	Measuring position	Life test position	Switching cycle
1 h at test voltage	12V DC	12V AC	horizontal	horizontal	25 min on / 5 min off

## Conditions for use

Permissible burning position	Pinch	Pins	Mirror	Quarz-bulb
Base down $\pm 105^\circ$ (S105)	400 °C max	300 °C max	300 °C max	250 °C min / 900° C max

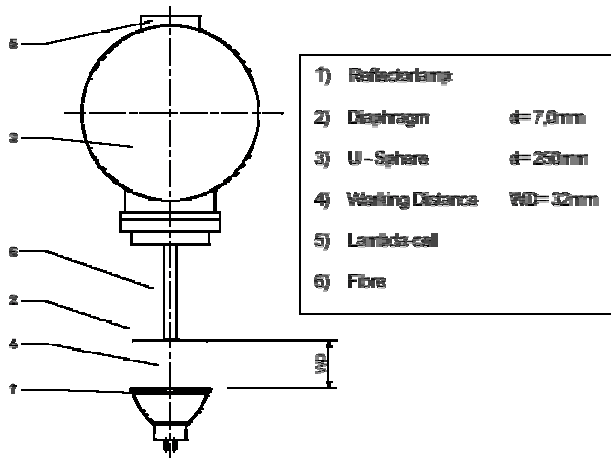

GE Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

MR16 Photo Lamps - Data sheet - May 2005


© General Electric Company (USA) 2004

and General Electric are both registered trademarks of the General Electric Company, USA

- Precisely manufactured, tailored filaments which maximise source brightness giving optimum performance.
- High light-generating efficacy to help minimise power consumption and heat generation.
- Prefocus-type caps or precision rim mounting to position the filament accurately in relation to the associated optics.

## Multi- Mirror® Quartzline® 100W Projection Lamps

### Lamp dimension

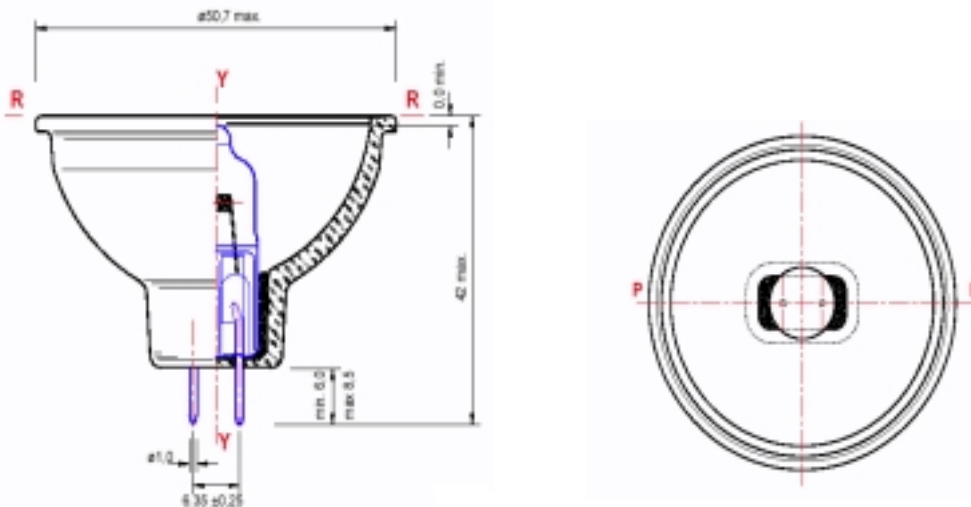

Watt	Volt	ANSI Code	LIF Code	Application	Cap	Dimension		Filament	Working distance	Life (hours)	Pack Qty	Product Code	CCT K
						A	B						
100	12	EFP	A1/231	8mm projection	GZ6.35	42	50.7	CC-6	32	50	50	21278	3350



# MR16 Lamp 100W Technical Data

## Type Approval


Code No.	Voltage	Wattage	Initial fibre luminous flux	Rated Life
21278	12V	100W +8%	750 lm -15%	50 h B50 / 20 h B3

## Measurement Conditions

Ageing	Test-Voltage	Life-Test-Voltage	Measuring position	Life test position	Switching cycle
1 h at test voltage	12V DC	12V AC	horizontal	horizontal	25 min on / 5 min off

## Conditions for use

Permissible burning position	Pinch	Pins	Mirror	Quarz-bulb
Base down $\pm 105^\circ$ (S105)	400 °C max	300 °C max	300 °C max	250 °C min / 900° C max

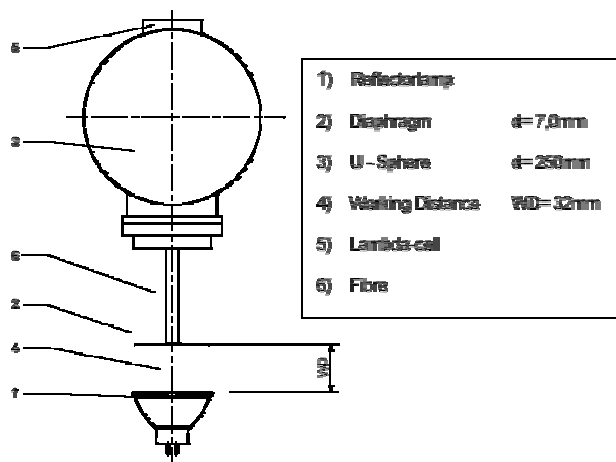

GE Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

MR16 Photo Lamps - Data sheet - May 2005

© General Electric Company (USA) 2004


and General Electric are both registered trademarks of the General Electric Company, USA

# GE Consumer & Industrial Specialty Lighting

- Precisely manufactured, tailored filaments which maximise source brightness giving optimum performance.
- High light-generating efficacy to help minimise power consumption and heat generation.
- Prefocus-type caps or precision rim mounting to position the filament accurately in relation to the associated optics.

## Multi- Mirror® Quartzline® 150W Projection Lamps

### Lamp dimension

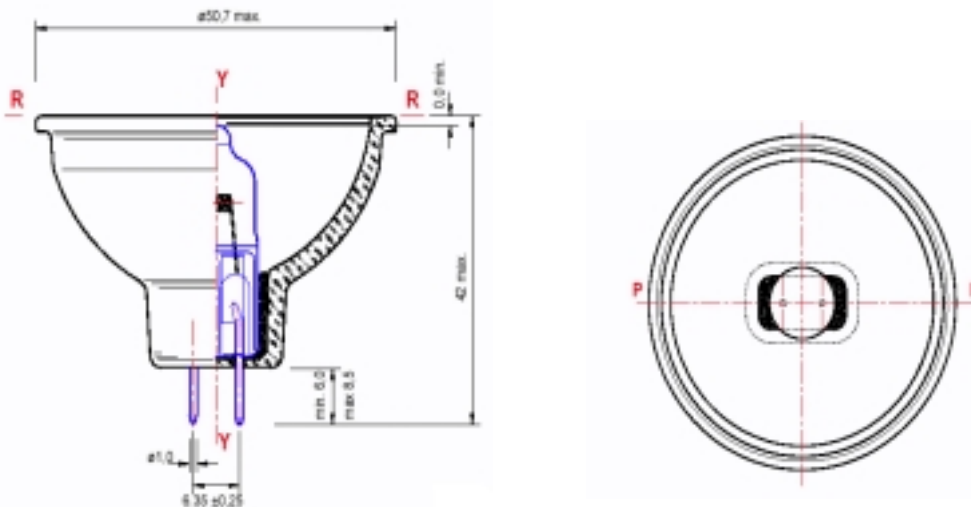

Watt	Volt	ANSI Code	LIF Code	Application	Cap	Dimension		Filamen t	Working distance	Life (hours)	Pack Qty	Product Code	CCT K
						A	B						
150	15	EFR	A1/232	8mm projection	GZ6.35	42	50.7	CC-6	32	50	50	21279	3350



# MR16 Lamp 150W Technical Data

## Type Approval


Code No.	Voltage	Wattage	Initial fibre luminous flux	Rated Life
21279	12V	150W +8%	840 lm -15%	50 h B50 / 20 h B3

## Measurement Conditions

Ageing	Test-Voltage	Life-Test-Voltage	Measuring position	Life test position	Switching cycle
1 h at test voltage	15V DC	15V AC	horizontal	horizontal	25 min on / 5 min off

## Conditions for use

Permissible burning position	Pinch	Pins	Mirror	Quarz-bulb
Base down $\pm 105^\circ$ (S105)	400 °C max	300 °C max	300 °C max	250 °C min / 900° C max

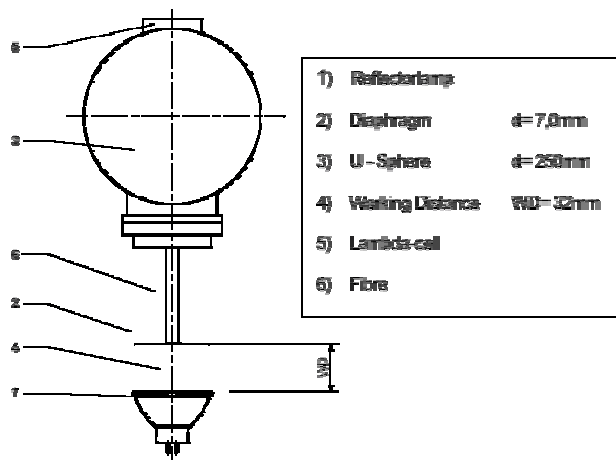

GE Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

MR16 Photo Lamps - Data sheet - May 2005

© General Electric Company (USA) 2004

and General Electric are both registered trademarks of the General Electric Company, USA