

# Medium Pressure

# HOK 65/80 1CT

Medium Pressure Mercury lamps are available in a wide range with an arc length between 10 and 140 centimeter. The lamps can be fitted with various types of end fitting from our catalogue, or equipped with customer special fittings, cables or pins. The lamps are made from selected types of quartz glass, with transmission characteristics tailored to the application. Medium Pressure Mercury lamps contain sophisticated quantities of mercury bromides, providing a self-cleaning halogen cycle, to control the depreciation of UV radiation over lamp life.

716 (max) mm

24 (max) mm

650 mm

### Product data

#### General Characteristics

Cap-BaseSK32Cap-Base Information-Execution-Operating Positionp10Main ApplicationIndustrial UVRun Time0.083 (max) hr

#### • Electrical Characteristics

Lamp Wattage 5000 W Lamp Wattage Tech-5000 W nical Lamp Voltage 780 (min), 840 (nom), 900 (max) V Lamp Current 6.6 A Ignition Time 10 (max) s Re-ignition Time 10 (max) min 80 W/cm Consumed Watt per cm

#### • Luminaire Design Requirements

Pinch Temperature Bulb Temperature 300 (max) C 600 (min), 900 (max) C

#### • Product Dimensions


Overall Length C Diameter D Arc Length O

#### • Product Data

Order code 928188605104 928188605104 Full product code HOK 65/80 1CT Full product name HOK 65/80 1CT/4 Order product name Pieces per pack Packing configuration 4 Packs per outerbox 8711500188670 Bar code on pack -EAN1 Bar code on 8711500188687 outerbox - EAN3 928188605104 Logistic code(s) -12NC Net weight per piece 0.225 kg



## Dimensional drawing






	· · ·	· · ·	· · ·	_
HOK 65/80	738	21.92	650	_



## Photometric data

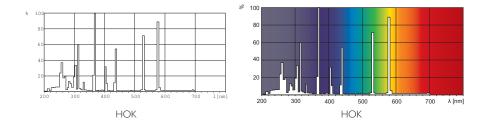



 $\ensuremath{\mathbb{C}}$  2011 Koninklijke Philips Electronics N.V. All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting