

Offset Print HPM DIAZO

HPM 4010 1CT

HPM Diazo lamps radiate in the diazo range and are optimized for UVA radiation. They are therefore ideal for high-quality, large-format printing and plotting applications in the architectural and engineering industries. In addition, HPM Diazo lamps provide a high radiant efficiency and high arc stability for cost-efficient and reliable usage. They provide the ideal light source for contact copying of images from transparent film to UV-sensitive carriers such as film, offset plates, printed circuit boards and microfilms. They are also ideal for photochemical process applications such as the UV-curing of glues, resins and pigmented lacquers.

Product data

• General Characteristics

Cap-Base	C10.5s
Cap-Base Information	Cable 190mm
Operating Position	p10
Main Application	Reprography
Life to 10% failures	750 hr
EM	

• Electrical Characteristics

Lamp Wattage	4000 W
Lamp Current	13.5 A
Dimmable	No

• Product Dimensions

Overall Length C	206 (max) mm
Diameter D	32 (max) mm
Arc Length O	117 mm


• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	750 (min), 950 (max) C

• Product Data

Order code	928079406002
Full product code	928079406002
Full product name	HPM 4010 1CT
Order product name	HPM 4010 1CT/4
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8711500191007
Bar code on outerbox - EAN3	8711500191014
Logistic code(s) - 12NC	928079406002
Net weight per piece	0.070 kg



Dimensional drawing



HPM 4010

Product	C (Max)	D (Max)	O (Norm)
HPM 4010	206	32	117

Photometric data

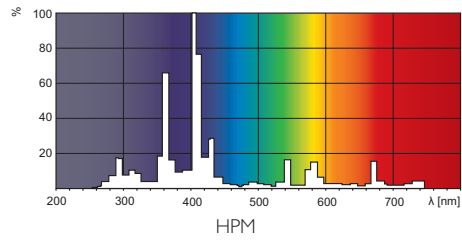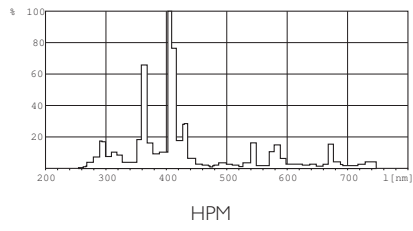

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, August 26
data subject to change