

ITT 3000 W 400 V-0826 K

HALOTHERM | Infrared halogen lamps with white reflector



- Manufacture of PET bottles
- Coil coating
- Professional grills and heated counters in restaurants

Product benefits

- High efficiency
- Precise controllability
- Long lamp life
- Short response time

Technical data

Electrical data


| | |
|----------------------|--------|
| Nominal wattage | 3000 W |
| Nominal voltage | 400 V |
| Nominal current | 7.50 A |
| Lamp current | 7.5 A |
| Construction voltage | 400 V |
| Construction wattage | 3 kW |

Light technical data

| | |
|-------------------|--------|
| Color temperature | 2500 K |
|-------------------|--------|

Dimensions & weight

| | |
|-----------------|-----------|
| Diameter | 11.0 mm |
| Length | 351.0 mm |
| Filament length | 285.00 mm |
| Cable length | 200.0 mm |

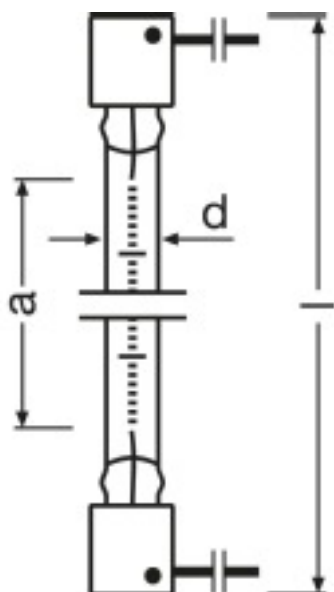

Product line drawing

Lifespan

| | |
|----------|--------|
| Lifespan | 5000 h |
|----------|--------|

Additional product data

| | |
|-----------------------------|----------|
| Base (standard designation) | K9x15/21 |
| Connector: Presence | J |

Capabilities

| | |
|------------------|-----|
| Burning position | p15 |
|------------------|-----|



Burning position

Logistical Data

| Product code | Packaging unit (Pieces/Unit) | Dimensions (height x width x length) | Gross weight | Volume |
|---------------|---------------------------------|---|--------------|----------------------|
| 4008321206312 | Folding carton box 1 | - x - x - | | |
| 4008321206329 | Shipping carton box 12 | 125 mm x 90 mm x 395 mm | 1021.00 g | 4.44 dm ³ |

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.