



# MASTER MHN-LA 1000W/842 230V XWH UNP

Product family description  
Compact quartz metal halide lamps with double-pin

## Product Features

- Compact source (Long Arc) with high luminous efficacy
- Double-pin

## Product Benefits

- Allows compact and efficient luminaire systems with precision optics for good beam control and minimal spill light
- Good colour rendering creates a pleasant ambience with high visual comfort for players and spectators
- Continuous spectral distribution offers options for semi-professional stadiums and for professional stadiums with regular TV coverage

## Environment

- This product is RoHS compliant.
- This product is covered by WEEE

## Application

- Professional and semi-professional sports lighting and floodlighting

## Luminaires

- MHN-LA lamps require UV-absorbing and protective front glass and correct thermal behaviour for optimal lamp performance


Product data	
Order code	200785 00
Full product code	871150020078500
loccod	
Full product name	MASTER MHN-LA 1000W/842 230V XWH UNP
Order product name	MASTER MHN-LA 1000W/842 230V XWH UNP
Packing type	Unpacked
Pieces per pack	1
Packing configuration	1

Product data	
Packs per outerbox	1
Bar code on pack - EAN1	8711500200785
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500200785
Logistic code(s) - 12NC	9280 730 05130
ILCOS code	MN-1000-E-K-/H
Net weight per piece	0.141 KG
Successor order code	
Cap-Base	X528
Bulb	TD40 [TD 40mm]
Bulb Finish	Clear
Burning Position	p5 [Parallel +/-5D or Horizontal(HOR)]
Life to 5% failures	3000 hr
Life to 10% failures	4000 hr
Life to 20% failures	6000 hr
Life to 50% failures	10000 hr
Rated Lamp Wattage	1000W
Lamp Wattage EM	1040.0 W
Voltage	230V
Lamp Voltage	125 V
Lamp Current EM	9.3 A
Dimmable	no
Mercury (Hg) Content	112 mg
Colour Code	842 [CCT of 4200K]
Colour Rendering Index	80 Ra8
Colour Designation	Cool White
Colour Temperature	4200 K
Chromaticity Coordinate X	370 -
Chromaticity Coordinate Y	370 -
Lamp Luminous Flux EM	100000 Lm
Lamp Luminous Efficacy EM	96.2 Lm/W
Lumen Maintenance 2000h	80 %
Lumen Maintenance 5000h	65 %
Lumen Maintenance 10000h	50 %
Average Luminance EM	2200 cd/cm2
Lumen Maintenance 1000h	- %
Lumen Maintenance 1500h	85 %
Bulb Temperature	920 C




MASTER MHN-LA 1000W




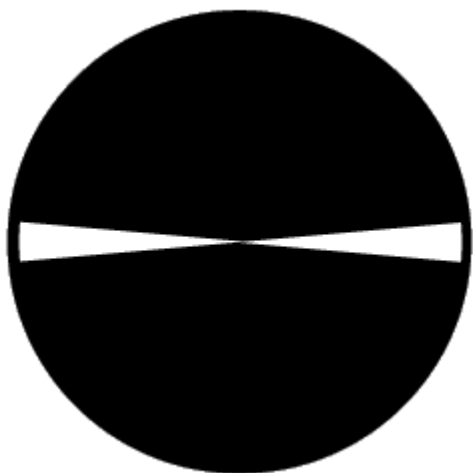


Burning Position p5

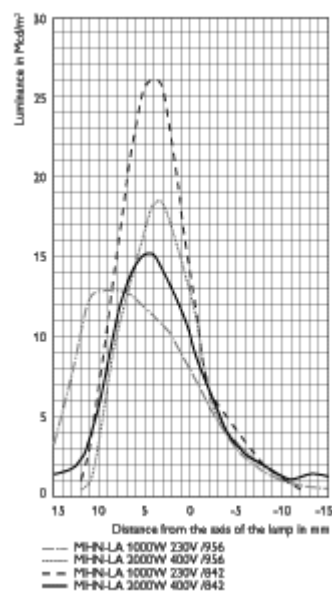


MASTER MHN-LA

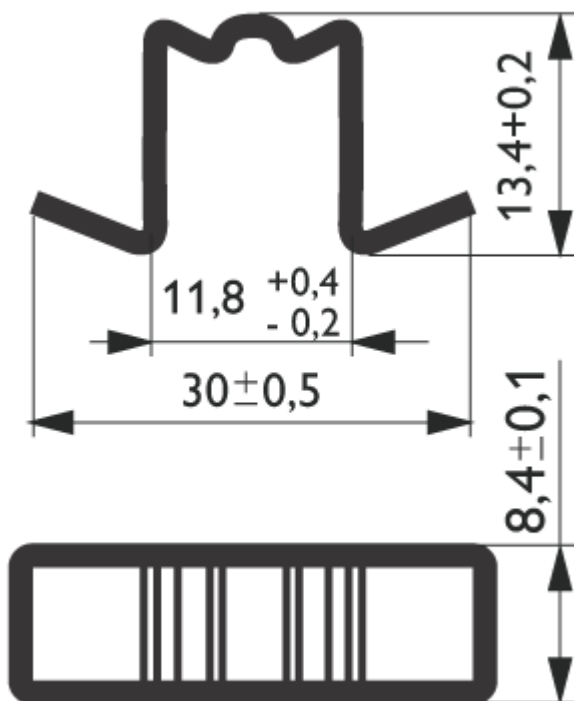


MASTER MHN-LA X528

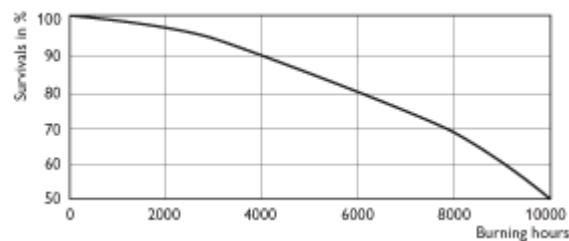

MASTER MHN-LA 1000W/842/956 230V


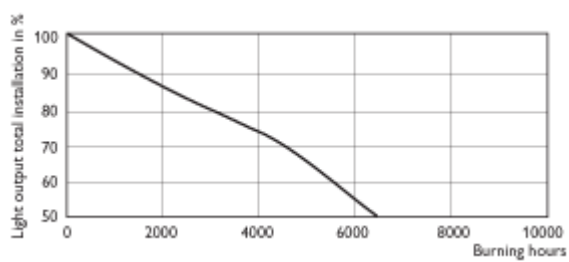


MASTER MHN-LA 1000W/842/956 230V

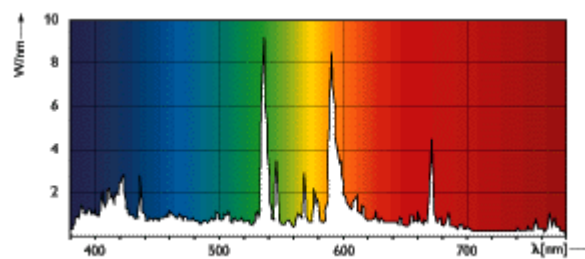


MASTER MHN-LA 1000W /842

MASTER MHN-LA 1000W/842 230V

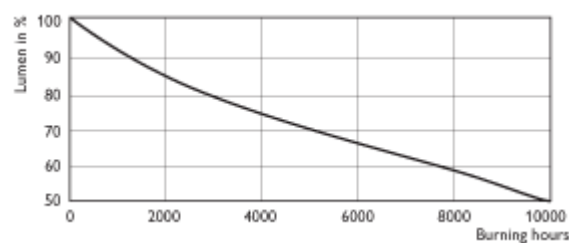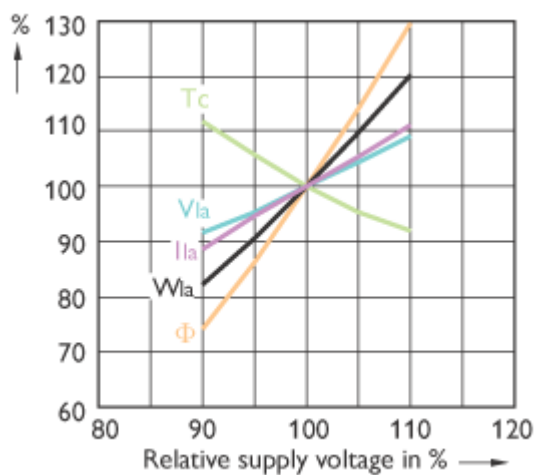


MASTER MHN-LA 1000W/842/956 230V

MASTER MHN-LA 1000W

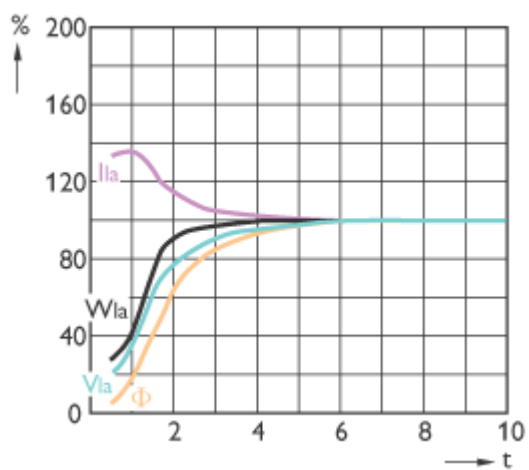

MASTER MHN-LA

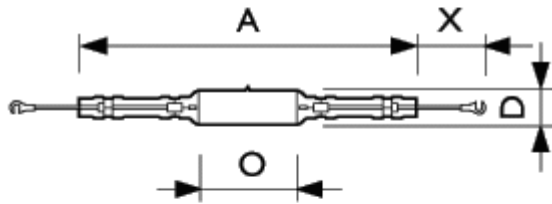

MASTER MHN-LA

	A	A	A	D	D	D
Full product name	Nom	Nom	Nom	Max	Max	Max
MASTER MHN-LA 1000W/842 230V XWH UNP	294	294	294	40	40	40

	O	O	O	X	X	X
Full product name	Nom	Nom	Nom	Nom	Nom	Nom
MASTER MHN-LA 1000W/842 230V XWH UNP	40.5	40.5	40.5	35	35	35

Full product name
MASTER MHN-LA 1000W/842 230V XWH UNP

