



MSI 575 UNP

Product family description
 High-efficiency metal halide lamps with sure-grip end knobs with cup springs and a special heat-resistant bond between the bulb and the caps

Product Features

- High luminous efficacy
- Compact arc
- Good colour rendering
- Run-up time 3 minutes

Application

- Indoor and outdoor colour television
- Indoor and outdoor filming
- Theatre stages
- Overhead projectors
- Disco lighting
- Outdoor architectural lighting

Luminaires

- Luminaire lenses must block the considerable UV output of the lamps
- No radiation must be spilled through ventilation slots
- Must only be operated in closed luminaires because of the high internal working pressure

System


- Can be operated on an AC electronic power supply or on a magnetic ballast-ignitor combination
- Hot re-ignition possible with a high voltage peak (up to 75 kV)

Product data	
Order code	199430 00
Full product code	871150019943000
loccod	
Full product name	MSI 575 UNP
Order product name	MSI 575 UNP/1
Packing type	Unpacked



Product data	
Pieces per pack	1
Packing configuration	1
Packs per outerbox	1
Bar code on pack - EAN1	8711500199430
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500199430
Logistic code(s) - 12NC	9281 043 00021
ILCOS code	
Net weight per piece	0.038 KG
Successor order code	
Cap-Base	SFC10-4
Cap-Base Information	SureFit-CapRod 10-4
Burning Position	any
Main Application	Studio/Disco
Life to 50% failures EM	1000 hr
Rated Lamp Wattage	575W
Technical Type	575
Technical Lamp Power	575 W
Lamp Current	6.95 A
Colour Rendering Index	65 Ra8
Colour Temperature	5600 K
Lamp Luminous Flux EM	49000 Lm
Lamp Luminous Efficacy EM	85 Lm/W



MSI 575




Cap-Base SFC10-4

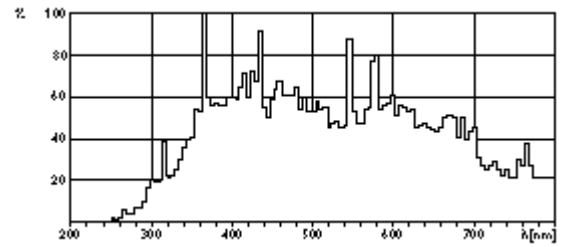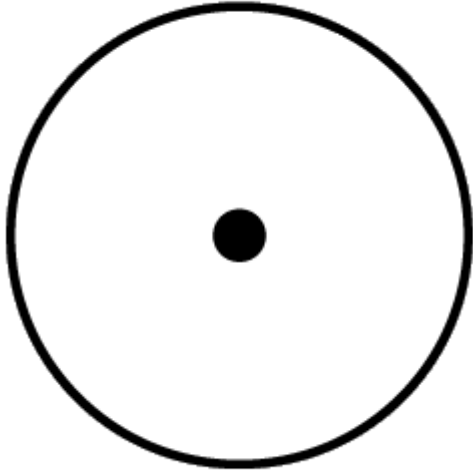

MSI

Burning Position any

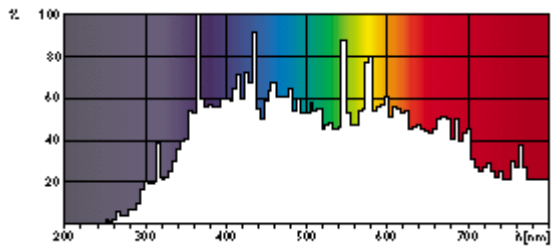

MSI

	C	C	C	D	D	D
Full product name	Max	Max	Max	Max	Max	Max
	136	136	136	21.0	21.0	21.0

