



# MSR 575 HR P 1CT

Product family description  
 High-efficiency hot restrike metal halide lamps designed for optimum light collection

**Product Features**

- Run-up time 2 minutes
- Frosted top of outer bulb to avoid excessively bright centre beam in open face luminaires
- Universal burning position

**Product Benefits**

- High luminous efficacy
- Compact arc (5 - 20 mm)
- Excellent colour rendering
- Dimmable with a stable colour temperature

**Application**

- Indoor and outdoor filming
- Studios and theatres
- Professional photography
- Solar simulation

**Luminaires**

- Must only be operated in closed luminaires, because of the high internal working pressure
- Luminaires must block the emitted UV radiation, with no radiation spill through ventilation slots

**System**

- Can be operated on an electronic power supply or a magnetic ballast-ignitor combination
- Hot re-ignition is possible with a high voltage peak of<br/>25 - 55 kV



Product data	
Order code	192622 45
Full product code	871150019262245
locod	
Full product name	MSR 575 HR P 1CT

Product data	
Order product name	MSR 575 HR P 1CT/4
Packing type	1 Carton
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8711500192622
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500192639
Logistic code(s) - 12NC	9280 980 05108
ILCOS code	
Net weight per piece	0.100 KG
Successor order code	
System Description	Hot Restrike
Cap-Base	G22
Cap-Base Information	-
Execution	-
Burning Position	any
Main Application	Projection
Life to 50% failures EM	1000 hr
Rated Lamp Wattage	575W
Technical Type	575
Technical Lamp Power	575 W
Lamp Current	6.95 A
Colour Code	-
Colour Rendering Index	90 Ra8
Colour Temperature	5900 K
Lamp Luminous Flux EM	49000 Lm
Lamp Luminous Efficacy EM	85 Lm/W





MSR



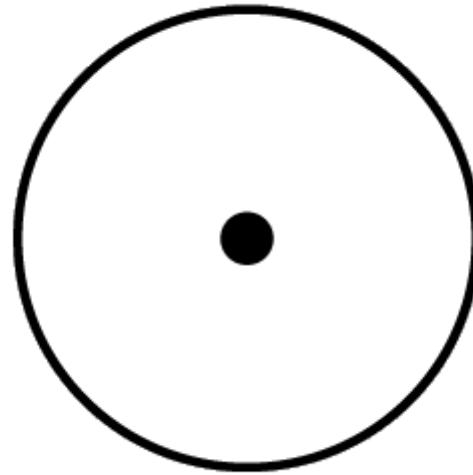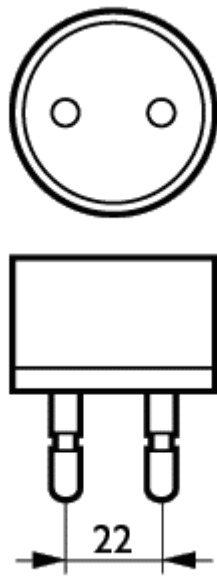

Cap-Base G22

Burning Position any

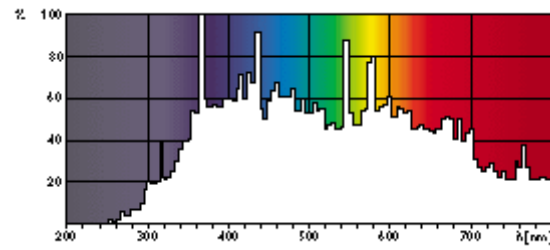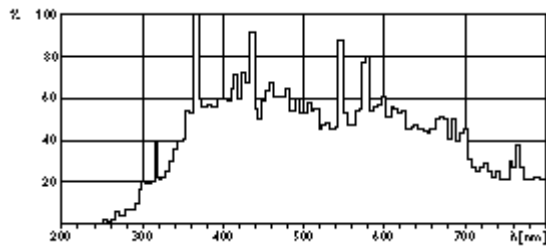

MSR HR P/P

MSR HR P/P

	C	C	D	D	L	L
Full product name	Max	Max	Max	Max	Min	Min
MSR 575 HR P ICT	145	145	30	30	69	69

	L	L	L	L	O	O
Full product name	Nom	Nom	Max	Max	Nom	Nom
MSR 575 HR P ICT	70	70	71	71	7.0	7.0

