



MSR GOLD 1200 SA/ SE 1CT

Product family description
High-efficiency short arc metal halide lamps
designed for optimum light collection

Product Features

- Run-up time max. 2 minutes
- Restrike time 5 - 10 minutes, depending on cooling conditions
- Non-dimmable

Product Benefits

- High luminous efficacy
- Very compact arc
- Good colour rendering

Application

- Entertainment

Luminaires

- Must only be operated in closed luminaires, because of the high internal working pressure
- Luminaires must block the emitted UV radiation, with no radiation spill through ventilation slots

System

- Should preferably be operated on power-stabilised electronic ballasts, although magnetic ballasts can also be used



| Product data | |
|-----------------------|---------------------------|
| Order code | 209610 45 |
| Full product code | 871150020961045 |
| loccod | |
| Full product name | MSR GOLD 1200 SA/SE 1CT |
| Order product name | MSR GOLD 1200 SA/SE 1CT/4 |
| Packing type | 1 Carton |
| Pieces per pack | 1 |
| Packing configuration | 4 |
| Packs per outerbox | 4 |

| Product data | |
|---|----------------|
| Bar code on pack - EAN1 | 8711500209610 |
| Bar code on intermediate packing - EAN2 | |
| Bar code on outerbox - EAN3 | 8711500209627 |
| Logistic code(s) - 12NC | 9281 746 05108 |
| ILCOS code | |
| Net weight per piece | 0.107 KG |
| Successor order code | |
| System Description | SA/SE |
| Cap-Base | PGJ41 |
| Cap-Base Information | PGJ41 |
| Execution | - |
| Burning Position | any |
| Main Application | Entertainment |
| Rated Lamp Wattage | 1200W |
| Technical Type | 1200 |
| Technical Lamp Power | 800 W |
| Lamp Current | 9.2 A |
| Colour Code | - |
| Colour Rendering Index | 68 Ra8 |
| Colour Temperature | 6500 K |
| Lamp Luminous Flux EM | 61000 Lm |
| Lamp Luminous Efficacy EM | 76 Lm/W |




MSR 1200W PGJ41



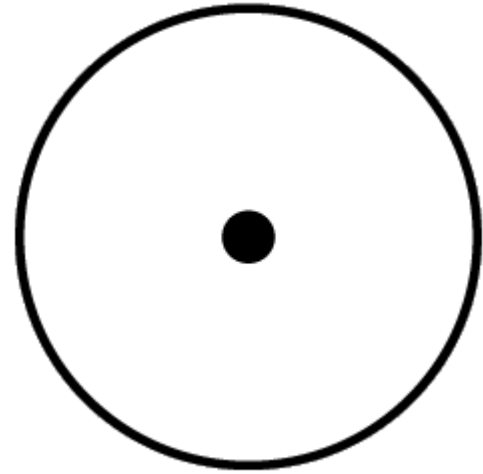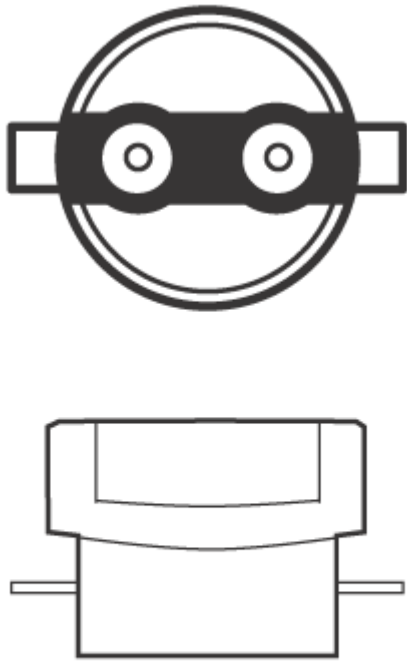

Burning Position any

Cap-Base PGJ41

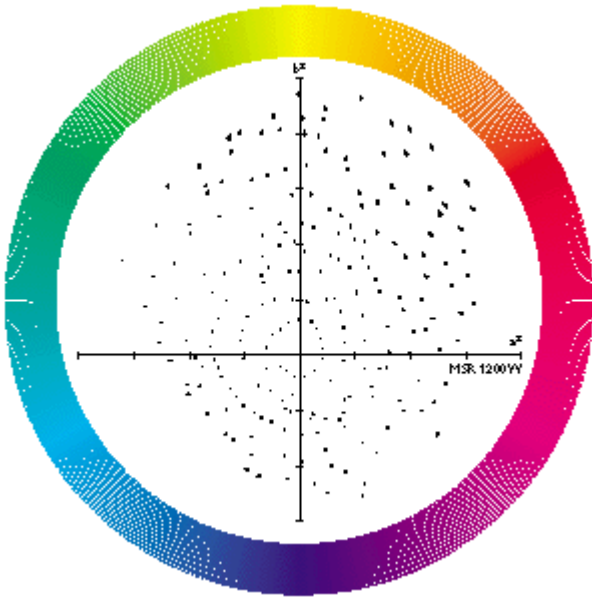

MSR 1200W

| | C | C | D | D | L | L |
|-------------------------|-----|-----|------|------|-----|-----|
| Full product name | Max | Max | Max | Max | Min | Min |
| MSR GOLD 1200 SA/SE ICT | 109 | 109 | 26.5 | 26.5 | 44 | 44 |

| | L | L | L | L | O | O |
|-------------------------|-----|-----|-----|-----|-----|-----|
| Full product name | Nom | Nom | Max | Max | Nom | Nom |
| MSR GOLD 1200 SA/SE ICT | 45 | 45 | 46 | 46 | 5.5 | 5.5 |

