




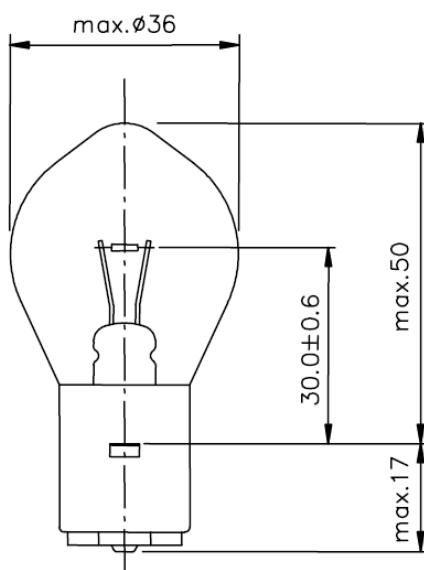
## Railway Signaling

	<b>Type RS6036</b> <b>35V 16,6W BA20s</b>
	<b>Ordering – No.</b> <b>46036</b>
<b>Product Description</b>	Signaling Lamp
<b>Features</b>	Single Filament
<b>Applications</b>	Railway Signal

## Technical Details

Type	RS6036
Rated Voltage (V)	35
Wattage (W) (at 35V)	max. 17,8
Luminous Flux (lm) (at 35V)	149 ± 10%
Lumen Maintenance (at 35V)	80% at 2250 h
Average Lifetime (h) (at 35V)	3000
Base	BA20s
Maximum Overall Length (mm)	max. 67,0
Bulb Diameter (mm)	max. 36,0
Light Center Length (mm)	30 ± 0,6
Packaging Configuration	200
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

## Drawing (in mm)



valid from	28.01.2013—V1—PN13/0030
replace for	08.08.2007
file	46036.100.pdf