


**KREIOS® SL**

Product reference	Product number	W	V	△	Ra	K	lm	t[h]	l [mm]	b [mm]	h [mm]	g	CE	UL
KREIOS® SL	405289900001	60	120	24/40-120	≥95	3.200	3.000	30.000 <sup>1)</sup>	178	154	202	1.900	no	yes
KREIOS® SL	4008321843951	60	220-240	24/40-120	≥95	3.200	3.000	30.000 <sup>1)</sup>	178	154	202	1.900	yes	no

1) Lumen Maintenance L70 @25°C

Mounting Bracket with clearance hole to accept 13mm/1/2" bolts for truss mounting. Threaded hole (1/2"-13 UNC) at fixture accepts direct mounting to clamps and other mounts. Items in packaging include barn doors, gel frame holder, 24° spot reflector, replacement zoom adjust ring in black color, zoom lock accessory, tripod adapter.

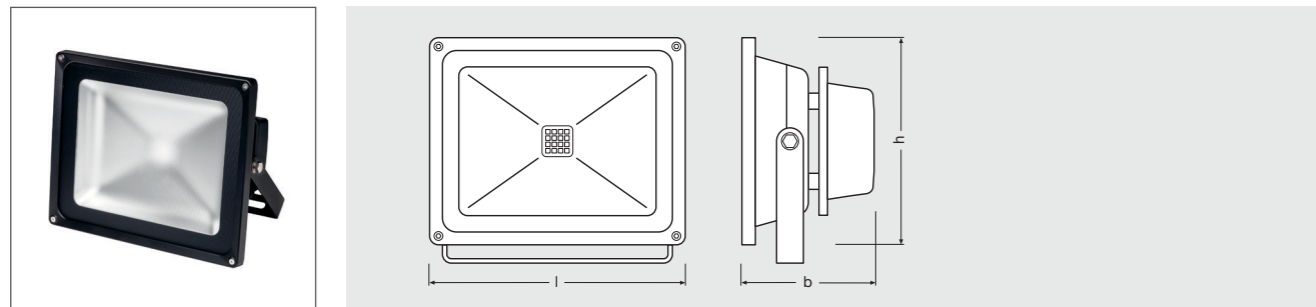


**KREIOS® FL**

Product reference	Product number	W	V	Ra	K	lm	t[h]	l [mm]	b [mm]	h [mm]	g	CE	UL
KREIOS® FL	4052899193178	60	100-240	≥95	3.200	3.000	30.000 <sup>1)</sup>	285	160	235	4.000	yes	no
KREIOS® FL	4052899193192	60	100-240	≥95	3.200	3.000	30.000 <sup>1)</sup>	285	160	235	4.000	no	yes
KREIOS® FLX	4052899193154	90	120	≥95	3.200	5.000	30.000 <sup>1)</sup>	285	160	235	4.600	no	yes
KREIOS® FL/FLX GEL FRAME	4052899201361	-	-	-	-	-	-	293	15	239	166	-	-

1) Lumen Maintenance L70 @25°C

Safety: To prevent personal injury or damage to property, halogen lamps may be operated in suitable luminaires designed with mechanisms (protective shields, grids etc.) to ensure that in the event of a lamp bursting no parts/shards can escape and that no ultraviolet radiation can escape during operation. The lamps emanate intense heat.

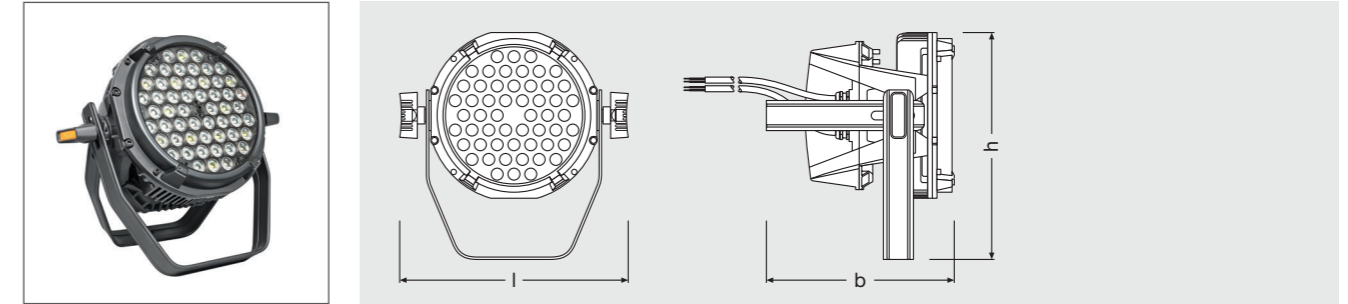

**KREIOS® PAR technical data (EU)**

Product reference	Product number	IP	LED quantity	W	V	△	⊙	t[h]	h [mm]	b [mm]	l [mm]	g	CE
KREIOS® PAR	4052899204751	65	12R,18G,12B,12W	162	100-240	15°	0-100%	30.000 <sup>1)</sup>	330	280	341	6.900	yes
KREIOS® PAR	4052899204829	65	12R,18G,12B,12W	162	100-240	30°	0-100%	30.000 <sup>1)</sup>	330	280	341	6.900	yes
KREIOS® PAR	4052899204850	65	12R,18G,12B,12W	162	100-240	45°	0-100%	30.000 <sup>1)</sup>	330	280	341	6.900	yes
KREIOS® PAR	4052899204867	65	12R,18G,12B,12W	162	100-240	60°	0-100%	30.000 <sup>1)</sup>	330	280	341	6.900	yes
KREIOS® PAR	4052899204898	65	12R,12G,12B,12W	144	100-240	15°	0-100%	30.000 <sup>1)</sup>	330	280	341	6.900	yes
KREIOS® PAR	4052899204904	65	12R,12G,12B,12W	144	100-240	30°	0-100%	30.000 <sup>1)</sup>	330	280	341	6.900	yes
KREIOS® PAR	4052899204935	65	12R,12G,12B,12W	144	100-240	45°	0-100%	30.000 <sup>1)</sup>	330	280	341	6.900	yes
KREIOS® PAR	4052899204942	65	12R,12G,12B,12W	144	100-240	60°	0-100%	30.000 <sup>1)</sup>	330	280	341	6.900	yes
KREIOS® PAR	4052899204959	20	12R,18G,12B,12W	162	100-240	15°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899204966	20	12R,18G,12B,12W	162	100-240	30°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899204997	20	12R,18G,12B,12W	162	100-240	45°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899205024	20	12R,18G,12B,12W	162	100-240	60°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899205055	20	12R,12G,12B,12W	144	100-240	15°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899205062	20	12R,12G,12B,12W	144	100-240	30°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899205079	20	12R,12G,12B,12W	144	100-240	45°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899205086	20	12R,12G,12B,12W	144	100-240	60°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899205093	20	12R,12G,12B	108	100-240	15°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899205147	20	12R,12G,12B	108	100-240	30°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899205178	20	12R,12G,12B	108	100-240	45°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes
KREIOS® PAR	4052899205185	20	12R,12G,12B	108	100-240	60°	0-100%	30.000 <sup>1)</sup>	319	251	315	5.700	yes

**KREIOS® PAR Accessories (EU)**

Product reference	Product number	Product number	IP	l [mm]	CE	
Power extension cable (3-PIN)	4052899300088	4052899300095	65	3.000	yes	
Power extension cable (3-PIN)	4052899300101	4052899300118	10	10.000	yes	
Data extension cable (5-PIN)	4052899300125	4052899300132	10	3.000	yes	
Data extension cable (5-PIN)	4052899300149	4052899300156	10	10.000	yes	
Data Adapter Data female / XLR-5 male	4052899300187	4052899300194	10	65/40 (XLR)	3.000	yes
Data Adapter Data male / XLR-5 female	4052899300200	4052899300217	10	65/40 (XLR)	3.000	yes
Power Adapter, open wires female	4052899300224	4052899300231	10	-	3.000	yes
Barn door Indoor	4052899300262	4052899300279	10	-	-	yes
Barn door Outdoor	4052899300286	4052899300293	10	-	-	yes

1) Lumen Maintenance L70 @25°C