


Conventional airfield lamps - Prefocus

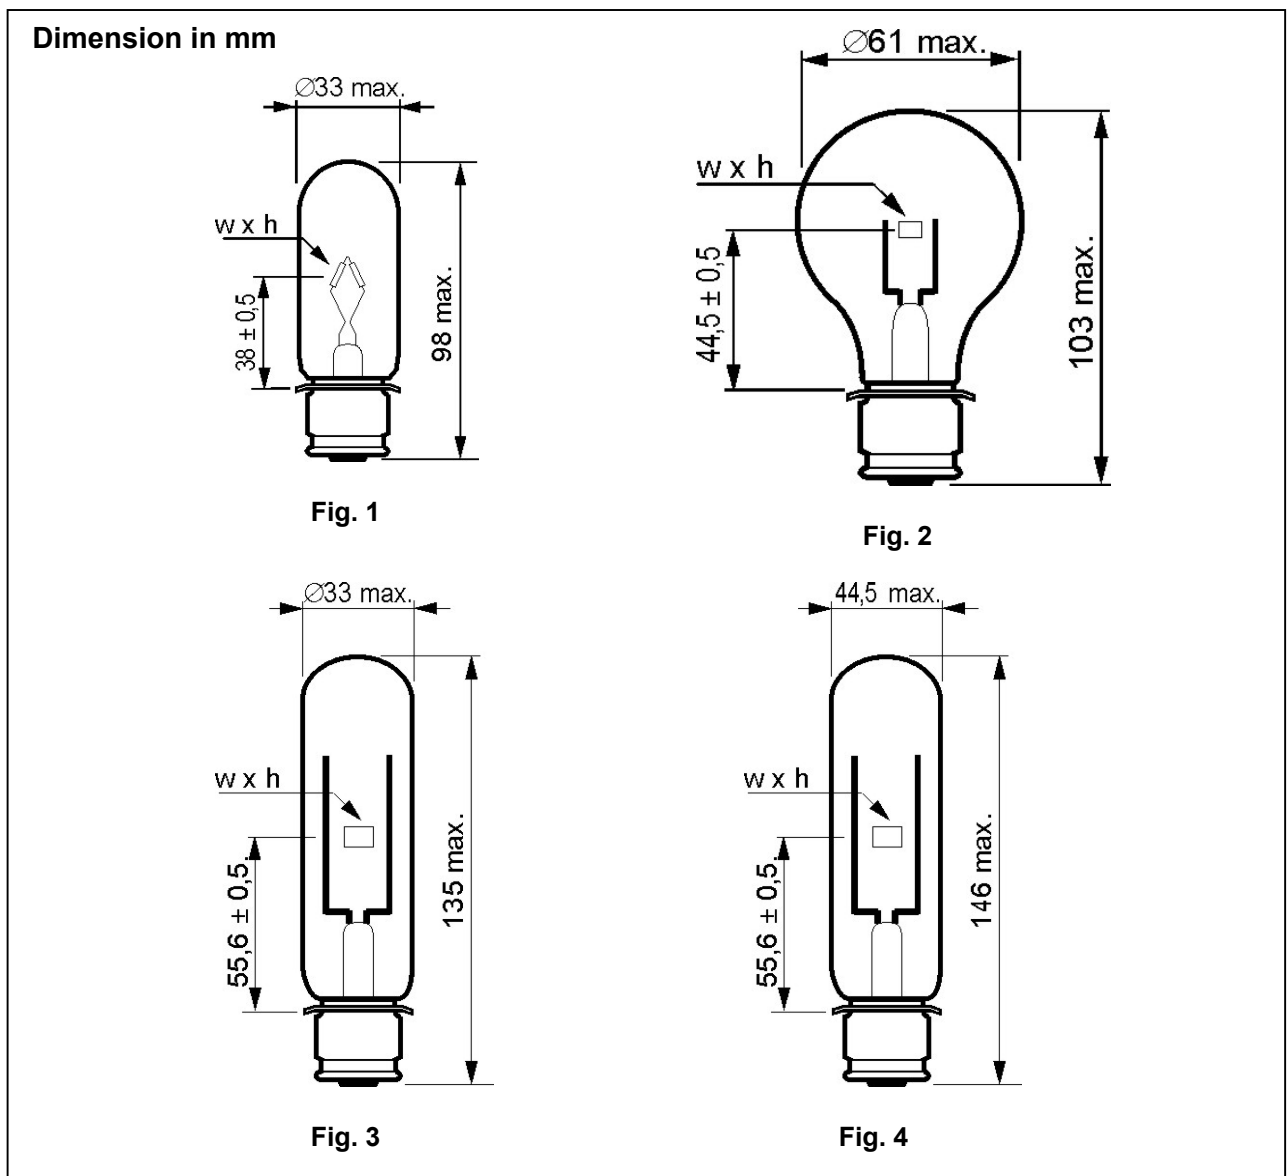

Technical and ordering data										
Type	Current	Wattage	Base	Luminous flux	Average life	LCL	Filament size	Filament	Fig.	Ordering number
	A	W	1)	Lm	hrs.	mm	w x h mm			
7669C	6,6	30	P28s	450	1000	38	5,5x3,5	C-2V	1	9224 000 85901
6,6A/T10/1P	6,6	30	P28s	435	1000	38,1		C-2V	1	9252 995 85901
7654C	6,6	45	P28s	730	1000	38	5,0x4,0	C-2V	1	9224 020 85901
6,6A/T10P	6,6	45	P28s	700	1000	38,1		C-2V	1	9252 995 85902
7668C	6,6	100	P28s	1850	1000	38	9,2x9,0	C-2V	1	9224 049 85901
7670C	6,6	200	P28s	4600	200	44,5	6,9x4,2	CC-6	2	9224 062 85901
6,6A/T14P	6,6	200	P28s	4900	75	55,6		C-13	4	9252 951 85901
6,6A/T14/2P	6,6	204	P28s	4200	500	55,6		C-13	4	9252 952 85901
6936C	6,6	210	P28s	4500	300	55,6	7,0x7,0	C-13	3	9224 185 85901
620PS40P	120V	620	P40s	11000	3000	145		C-7A	-	9206 045 36301

1) bottom contact solder contains lead

Issue 03/2004