


Halogen airfield lamps - Dichroic reflector

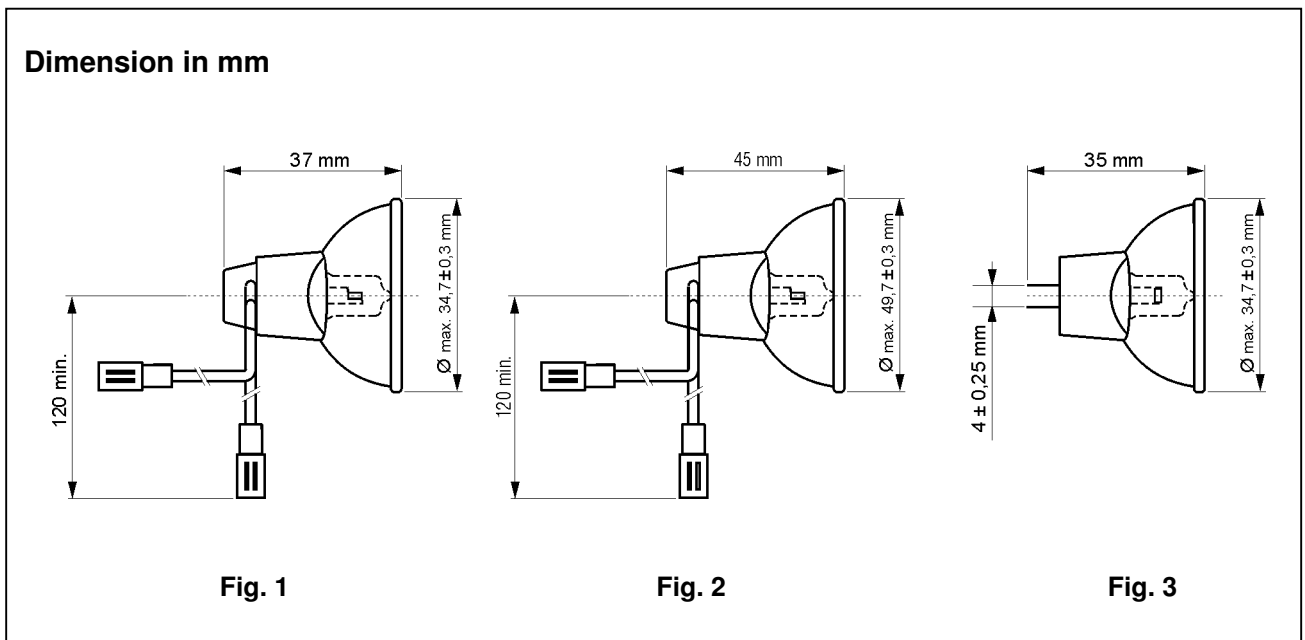

Technical and ordering data							
Type	Current	Wattage	Base	axial light intensity	Average life	Fig.	Ordering number
	A	W		kcd	hrs.		
6136	6,0	36	cable flat male connector 2)	min. 16	1500	2	9230 758 857..
6137	6,6	35	GZ4	min. 4,5	1500	3	9230 759 859..
6102	6,6	40	cable round female connector 1)	min. 10,5	1500	1	9230 187 859..
6104	6,6	40	cable flat male connector 2)	min. 10,5	1500	1	9230 191 859..
6110	6,6	40	cable flat female connector 3)	min. 10,5	1500	1	9230 197 859..
6101	6,6	48	cable flat female connector 3)	min. 20,0	1500	2	9230 188 859..
6106	6,6	48	cable flat male connector 2)	min. 20,0	1500	2	9230 193 859..
6107	6,6	48	cable round female connector 1)	min. 20,0	1500	2	9230 198 859..
6109	6,6	48	cable round female connector 1)	min. 23,0	1000	2	9230 750 859..
6103	6,6	105	cable round female connector 1)	min. 30,0	1000	2	9230 189 859..
6105	6,6	105	cable flat female connector 3)	min. 30,0	1000	2	9230 192 859..
6108	6,6	105	cable flat male connector 2)	min. 30,0	1000	2	9230 199 859..

Issue 06/2005

- 1) 4mm diameter
- 2) flat male connector, complying with DIN 46248
- 3) flat female connector, complying with DIN 46247