

MASTER PL-C 2 Pin

MASTER PL-C 18W/865/2P 1CT

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Product data

General Characteristics

Cap-Base Cap-Base Information Life to 50% failures FM	G24d-2 2P 10000 hr
Life to 10% failures	6500 hr
LSF EM 8000h Rated,	78 %
3h cycle LSF EM 6000h Rated,	92 %
3h cycle LSF EM 4000h Rated,	98 %
3h cycle LSF EM 2000h Rated.	99 %
3h cycle	

• Light Technical Characteristics

Color Code Color Rendering Index	865 [CCT of 6500K] 80 Ra8
Color Designation (text)	Cool Daylight
Color Temperature	6500 K
Chromaticity Coor- dinate X	305 -
Chromaticity Coor- dinate Y	325 -
Lum Efficacy Rated EM 25°C	67 Lm/W
LLMF EM 8000h Rated	77 %
LLMF EM 6000h Bated	81 %
LLMF EM 4000h Rated	85 %



LLMF EM 2000h	90 %
Rated	
Luminous Flux EM	1200 Lm
25°C, Rated	
Luminous Flux EM	1200 Lm
25°C, Nominal	
Design Temperature	28 C

• Electrical Characteristics

Lamp Wattage Dimmable Lamp Current EM 25°C	18 W No 0.220 A
Lamp Wattage EM 25°C, Rated	18.0 W
Lamp Wattage EM	18 W
Lamp Voltage EM	100 V
25°C, Nominal	

• Environmental Characteristics

Energy Efficiency	В
Label (EEL)	
Mercury (Hg)	1.4 mg
Content	

• Product Dimensions

Base Face to Base	109.7 (max) mm
Face A	
Insertion Length B	128.0 (max) mm
Overall Length C	150.4 (max) mm
Diameter D	27.1 (max) mm
Diameter D1	27.1 (max) mm



MASTER PL-C 2 Pin

• Product Data

Order code Full product code Full product name Order product name

Pieces per pack Packing configuration Packs per outerbox

Bar code on pack -

Warnings and Safety

EAN1

927905486580 927905486580 MASTER PL-C 18W/865/2P 1CT MASTER PL-C 18W/865/2P 1CT/ 5X10BOX 1 5X10CC 50 8711500635273

Bar code on inter-	
mediate packing -	
EAN2	
Bar code on	
outerbox - EAN3	
Logistic code(s) -	
12NC	
ILCOS code	
Net weight per piec	e

8711500635280

8711500715821


927905486580

FSQ-18/65/1B-I-G24d=2 57.800 gr

• Dimming is not possible

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position


Dimensional drawing




D1

G24d-1/G24d-2/G24d-3, 2P

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-C 18W/865/2P	109.7	128.0	150.4	27.1	27.1



Photometric data

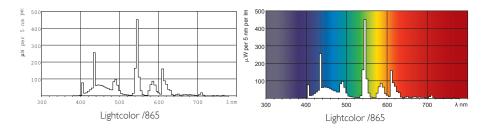



 $\ensuremath{\mathbb{C}}$ 2011 Koninklijke Philips Electronics N.V. All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting