



MASTER PL-L De Luxe 4 Pin

MASTER PL-L 90 De Luxe 36W/950/4P 1CT

MASTER PL-L De Luxe is a medium to high-wattage linear compact fluorescent lamp, typically used for general-illumination ceiling luminaires in retail, hospitality and office applications demanding higher lighting levels and excellent color rendering. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. It is designed for operation on electromagnetic as well as electronic HF control gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

System Description	-
Cap-Base	2G11
Cap-Base Information	4P
Life to 50% failures EM	15000 hr
Life to 50% fail Preheat EL,3h	20000 hr
Life to 50% fail Nonpreh EL,3h	10000 hr
Life to 10% fail Nonpreh EL,3h	7500 hr
Life to 10% fail Preheat EL,3h	14000 hr
Life to 10% failures EM	10000 hr
LSF HF Preheat 20000h Rated,3h	50 %
LSF HF Preheat 16000h Rated,3h	82 %
LSF HF Preheat 12000h Rated,3h	94 %
LSF HF Preheat 8000h Rated,3h	97 %
LSF HF Preheat 6000h Rated,3h	98 %
LSF HF Preheat 4000h Rated,3h	99 %
LSF HF Preheat 2000h Rated,3h	99 %
LSF EM 12000h Rated,3h cycle	80 %
LSF EM 8000h Rated,3h cycle	94 %
LSF EM 6000h Rated,3h cycle	96 %

LSF EM 4000h Rated, 3h cycle	98 %
LSF EM 2000h Rated, 3h cycle	99 %

• Light Technical Characteristics

Color Code	950 [CCT of 5000K]
Color Rendering Index	90 Ra8
Color Designation (text)	Daylight
Color Temperature	5300 K
Chromaticity Coordinate X	346 -
Chromaticity Coordinate Y	350 -
LLMF EM 12000h Rated	90 %
LLMF EM 8000h Rated	91 %
LLMF EM 6000h Rated	92 %
LLMF EM 4000h Rated	93 %
LLMF EM 2000h Rated	94 %
LLMF HF 20000h Rated	90 %
LLMF HF 16000h Rated	90 %
LLMF HF 12000h Rated	91 %
LLMF HF 8000h Rated	92 %
LLMF HF 6000h Rated	93 %



MASTER PL-L De Luxe 4 Pin

LLMF HF 4000h Rated	94 %
LLMF HF 2000h Rated	95 %
Luminous Flux EL 25°C, Rated	2350 Lm
Luminous Flux EL 25°C, Nominal	2350 Lm
Lum Flux Rated HF 25°C,horiz	2350 Lm
Lum Flux Nominal HF 25°C,horiz	2350 Lm
Lum Efficacy Rated HF 25°C,hor	81 Lm/W
Design Temperature	30 C
Lum Efficacy Rated EM 25°C,hor	81 Lm/W
Lum Flux Nominal EM 25°C,horiz	2350 Lm
Lum Flux Rated EM 25°C,horiz	2350 Lm

• Electrical Characteristics

Lamp Wattage 25°C	36 W
Lamp Voltage EL 25°C	90 V
Lamp Current EL 25°C	0.360 A
Dimmable	Yes
Lamp Current EM 25°C	0.435 A
Lamp Wattage EM 25°C, Rated	36.0 W
Lamp Wattage EL 25°C, Rated	36.0 W
Lamp Wattage EL 25°C, Nominal	36 W
Lamp Wattage EM 25°C, Nominal	36 W
Lamp Voltage EM 25°C	106 V

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content	4.4 mg

• Measuring Conditions

• Product Dimensions

Base Face to Base Face A	384.2 (max) mm
Insertion Length B	410 (max) mm
Overall Length C	416.6 (max) mm
Diameter D	37.7 (max) mm
Diameter D1	18 (max) mm


• Product Data

Order code	927903409574
Full product code	927903409574
Full product name	MASTER PL-L 90 De Luxe 36W/950/4P 1CT
Order product name	MASTER PL-L 90 De Luxe 36W/950/4P 1CT/10
Pieces per pack	1
Packing configuration	10
Packs per outerbox	10
Bar code on pack - EAN1	8711500620040
Bar code on outerbox - EAN3	8711500890542
Logistic code(s) - 12NC	927903409574
ILCOS code	FSD-36/53/1A-E-2G11
Net weight per piece	104.000 gr

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes


Dimensional drawing




2G11, 4P

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-L 36W/950/4P	384.2	410	416.6	37.7	18

Dimensional drawing



Photometric data

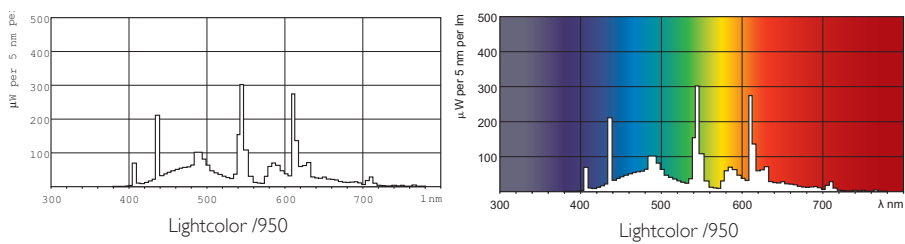

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, October 20
data subject to change