

MASTER PL-T 2 Pin

MASTER PL-T 13W/830/2P 1CT

MASTER PL-T is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base Cap-Base Information Life to 50% failures FM	GX24d- 2P 10000 h
Life to 10% failures	6500 hr
LSF EM 8000h Rated,	78 %
LSF EM 6000h Rated,	92 %
LSF EM 4000h Rated,	98 %
LSF EM 2000h Rated,	99 %
3h cycle LSF EM 6000h Rated, 3h cycle LSF EM 4000h Rated, 3h cycle	92 % 98 %

• Light Technical Characteristics

Color Code Color Rendering	830 [CCT of 3000K] 82 Ra8
Index Color Designation (text)	Warm White
Color Temperature	3000 K
Chromaticity Coor- dinate X	434 -
Chromaticity Coordinate Y	397 -
Lum Efficacy Rated EM 25°C	62 (min) Lm/W
LLMF EM 8000h	81 %
LLMF EM 6000h	84 %
Rated LLMF EM 4000h Rated	87 %

LLMF EM 2000h	92 %
Rated	
Luminous Flux EM	850 Lm
25°C, Rated	
Luminous Flux EM	900 Lm
25°C, Nominal	
Design Temperature	28 C

• Electrical Characteristics

Lamp Wattage	13 W
Dimmable	No
Lamp Current EM	0.170 A
25°C	
Lamp Wattage EM	13.0 W
25°C, Rated	
Lamp Wattage EM	13 W
25°C, Nominal	
Lamp Voltage EM	91 V
25°C	

• Environmental Characteristics

Energy Efficiency	Α
Label (EEL)	
Mercury (Hg)	1.4 mg
Content	

• Product Dimensions

66.7 (max) mm
91.0 (max) mm
114.2 (max) mn
41 (max) mm



MASTER PL-T 2 Pin

• Product Data

Order code 927914183071
Full product code 927914183071
Full product name MASTER PL-T 1

Full product name MASTER PL-T 13W/830/2P 1CT Order product name MASTER PL-T 13W/830/2P 1CT/

5X10CC

Pieces per pack 1
Packing configuration 5X10CC
Packs per outerbox 50

Bar code on pack - 8711500272119

EAN1

Warnings and Safety

• Use only with electromagnetic control gear

 Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position Bar code on intermediate packing - 8711500559647

EAN2

Bar code on outerbox - EAN3

Logistic code(s) - 12NC


8711500272126 927914183071

12NC ILCOS code FSM-13/30/1B-I-GX24d=1

Net weight per piece 58.000 gr


• Dimming is not possible

Dimensional drawing

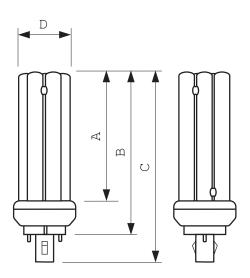


GX24d-1, 2P

Product	A (Max)	B (Max)	C (Max)	D (Max)
PL-T 13W/830/2P M	66.7	91.0	114.2	41



MASTER PL-T 2 Pin

Photometric data

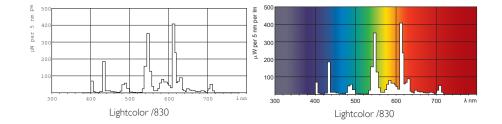



Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.