



MASTER PL-S 11W/ 840/2P 1CT

Product family description

Energy-saving compact fluorescent lamps
Compact long-arc low-pressure mercury
discharge lamp
Envelope consists of 2 parallel narrow
fluorescent tubes

Product Features

- 2-pin base with a housing incorporating the special instant starter and capacitor
- Lamp characteristics are influenced by operating conditions and control gear used
- The lamps contain only 3 mg of mercury
- Dimming is not possible

Product Benefits

- Optimal light performance for short or long operation per switch on
- Long life and sustainable light output

Environment

- Good environmental choice because of high energy efficiency, long life and low light output

depreciation, lowest mercury content

- Compliant with all RoHS and WEEE requirements: the lamps have a very low content of mercury, are lead free and make no use of hazardous flame retardants

Application

- Designed for use in hotels, restaurants, theatres and homes
- Suitable for use in signs, corridors, security and orientation lighting


System

- For use on conventional copper iron ballasts
- Radio interference suppression capacitor is installed


Product data

| | |
|---|------------------------------------|
| Order code | 261090 70 |
| Full product code | 871150026109070 |
| Full product name | MASTER PL-S 11W/840/2P 1CT |
| Order product name | MASTER PL-S 11W/840/2P 1CT/5X10BOX |
| Packing type | 1 Lamp in a Folding Carton |
| Pieces per pack | 1 |
| Packing configuration | 5X10BOX |
| Packs per outerbox | 50 |
| Bar code on pack - EAN1 | 8711500261090 |
| Bar code on intermediate packing - EAN2 | 8711500261106 |
| Bar code on outerbox - EAN3 | 8711500261113 |
| Logistic code(s) - 12NC | 9279 364 84011 |
| ILCOS code | FSD- 11/40/1B-I-G23 |
| Net weight per piece | 43.000 (GR) |
| Successor order code | |
| Rated Lamp Wattage[W] | 11W |
| Colour Code | 840 [CCT of 4000K] |


| Product data | |
|-------------------------------|---|
| Cap- Base Information | 2P |
| Cap- Base | G23[Two- Pin Compact Fluorescent; low preheat current; two retainers] |
| Execution | /2P[2 Pins] |
| Energy Efficiency Label (EEL) | A |
| Mercury (Hg) Content[mg] | 1.4 |
| Colour Rendering Index[Ra8] | 82 |
| Colour Designation (text) | Cool White |
| Colour Temperature[K] | 4000 |
| Lamp Luminous Flux EM[Lm] | 900 |

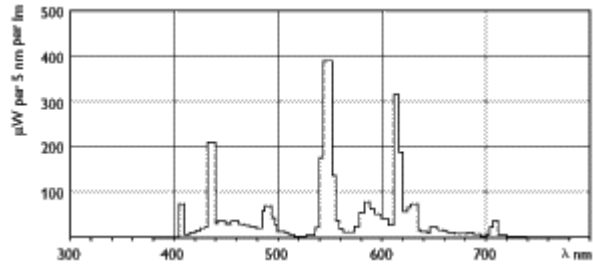

MASTER PL- S/840

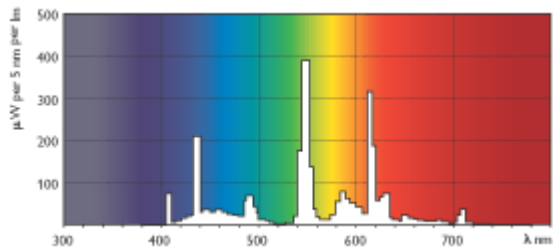

MASTER PL- S/840

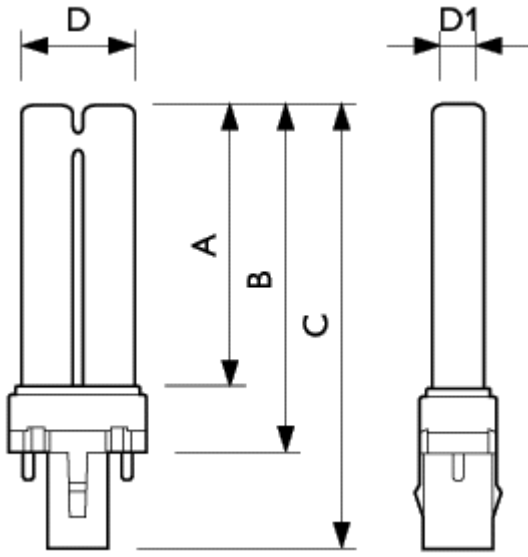

MASTER PL-S

| | A | B | C | D | D1 |
|--------------------------------------|-----|-----|-------|-----|-----|
| Full product name | Max | Max | Max | Max | Max |
| MASTER PL-S 11W/ 840/2P 1CT | 198 | 214 | 235.8 | 28 | 13 |

