



## MASTER PL- S 5W/ 840/4P 1CT

Product family description  
Energy- saving compact fluorescent lamps  
Compact long- arc low- pressure mercury  
discharge lamp  
Envelope consists of 2 parallel narrow  
fluorescent tubes

### Product Features

- 4- pin base without starter and capacitor
- Lamp characteristics are influenced by operating conditions and control gear used
- The lamps contain only 3 mg of mercury

### Environment

- Good environmental choice because of high energy efficiency, long life and low light output depreciation, lowest mercury content
- Compliant with all RoHS and WEEE requirements: the lamps have a very low content of mercury, are lead free and make no use of radioactive materials and hazardous flame retardants

### Product Benefits

- Optimal light performance for short or long operation per switch on
- Long life and sustainable light output

### Application

- Designed for use in hotels, restaurants, theatres and homes
- Suitable for use in signs, corridors, security and orientation lighting


### System

- Suitable for use with electronic gear, enabling dimmable light output, HF operation


### Product data

Order code	260543 70
Full product code	871150026054370
Full product name	MASTER PL- S 5W/840/4P 1CT
Order product name	MASTER PL- S 5W/840/4P 1CT/5X10BOX
Packing type	1 Lamp in a Folding Carton
Pieces per pack	1
Packing configuration	5X10BOX
Packs per outerbox	50
Bar code on pack - EAN1	8711500260543
Bar code on intermediate packing - EAN2	8711500260550
Bar code on outerbox - EAN3	8711500260567
Logistic code(s) - 12NC	9279 354 84011
ILCOS code	FSD- 5/40/1B- E- 2G7
Net weight per piece	20.000 (GR)
Successor order code	
Rated Lamp Wattage[W ]	5W
Colour Code	840 [CCT of 4000K]
Cap- Base Information	4P


Product data	
Cap- Base	2G7
Execution	/4P[4 Pins]
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content[mg ]	1.4
Colour Rendering Index[Ra8 ]	82
Colour Designation (text)	Cool White
Colour Temperature[K ]	4000
Lamp Luminous Flux EM[Lm ]	250
Lamp Luminous Flux EL[Lm ]	250

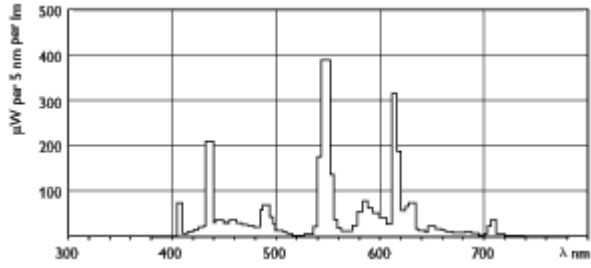

MASTER PL-S/840

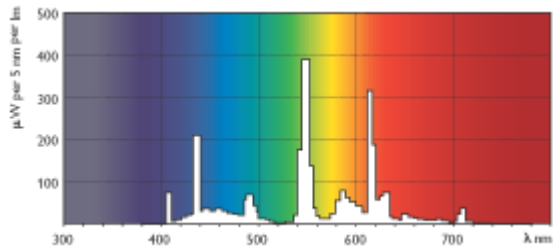

MASTER PL-S/840

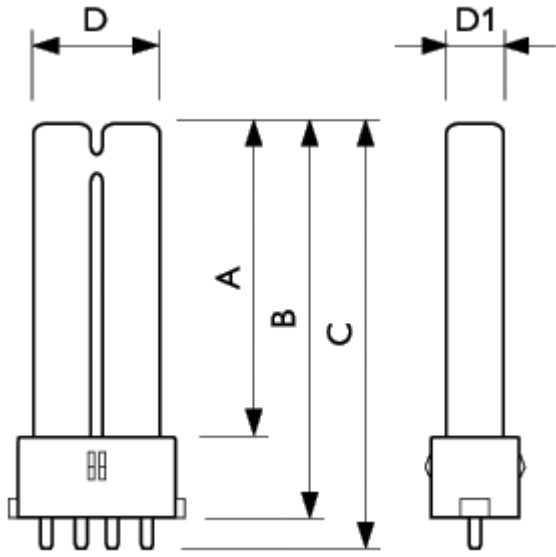

MASTER PL-S

	A	B	C	D	D1
Full product name	Max	Max	Max	Max	Max
MASTER PL-S 5W/ 840/4P 1CT	66	83	89.1	28	13

