

QL 165W Induction Lighting System

**The most
sustainable
lighting
solution**

QL Induction Lighting Systems

QL induction lighting is used for professional, general and special lighting applications because of its unmatched durability and high luminous efficacy with excellent light quality. QL offers a nearly maintenance free operation and superior energy saving. Induction lamps have a unique long performance life up to 100,000 hours because there is no use of electrodes in the bulb. The lifetime of the system is determined at 80,000 hours, which equals approximately 20 years based on 4000 burning hours per year.

The major features of QL lamp systems, and their related benefits for the user, are:

Benefits

- Easy installation
- Good color rendering (Ra > 80) and choice of color temperature
- Useful light immediately after switch on
- Easy to use as retrofit or in new construction applications
- Economic, environment-friendly lighting in situations with long burning hours
- Lowest maintenance costs

Features

- Dimmable to 50%
- Crisp white light with no color shift.
- Operates in hot and cold environments - amalgam control.
- High lumen efficiency - 165W QL features 12,000 initial lumens.
- Also available in 55 and 85 watts.

Application

Ideal for street lighting, bridges and tunnels, hazardous areas, cold storage warehouses and hard-to-reach applications.

Compliances and approvals

- **Safety**
IEC 62532, IEC 61347-1, IEC 62471
- **Performance**
IEC 62639 (in prep.), IEC 60929
- **Quality standard**
ISO 9001
- **Environmental management system**
ISO 14001
- **Electromagnetic Compatibility**
EN 61000, EN 55015, EN 55022
- **Vibration and (thermal)shocks**
IEC 60068

QL 165W Lamp



PRODUCT DATA

Product number	QL16500130	QL16500140
Full product name	QL Alu Base	QL Alu Base
	165W 830	165W 840
Pieces/sleeve	1	
Sleeves per box	6	
Net weight	0.452 kg per piece	
Cable length power coupler	555 mm / 21.9 inch	
Operating temperature	40°C to +55°C	
Safety approvals	C-UL-US and CE	



Light Technical Characteristics

Chromaticity Coordinate X	3000K*	4000K
Chromaticity Coordinate Y	435	388
RA	398	380
Luminous Flux System	>80	>80
Luminous Efficacy System	12000 lm	12000 lm
Luminous Efficacy Lamp	70 lm/W	70 lm/W
Luminance Average EL	86 lm/W	86 lm/W
PE.T.(NIOSH)	7.5 cd/cm2	7.5 cd/cm2
Damage Factor (Dfc)	>24h	>24h
	<0.6	<0.6

* Other color temperatures available upon request.


PHOTOMETRIC DATA

Spectral energy distribution

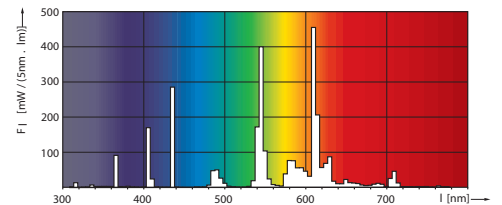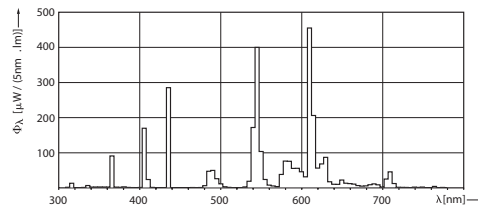


Typical Spectral energy distribution of QL 165W 3000K.

LIGHT DISTRIBUTION

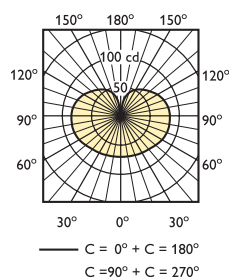

Typical light distribution of QL 165W

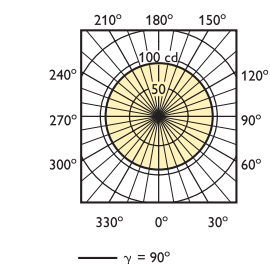

Typical light distribution of QL 165W, Azimuth angle

QL 165W Generator



PRODUCT DATA


Product number
 Product description
 Pieces per box
 Net weight
 Dimensions (L x W x H)
 Connectors

GE16523001	GE16512001
QL Generator 165W 200-277V	QL Generator 165W 100-120V
6	6
0.703 kg per piece	0.703 kg per piece
190 x 112 x 41 mm	190 x 112 x 41 mm
Cage clamp terminals	Cage clamp terminals

Features

- High Reliability
- Instant hot and cold (re) start
- Operates in hot and cold environments
- Dimmable to 50%
- L 70 >70.000 hrs
- Power Factor Correction and limited inrush current
- Protection lamp end of life
- Extended protection against mains faults and deviations

Dimming behavior

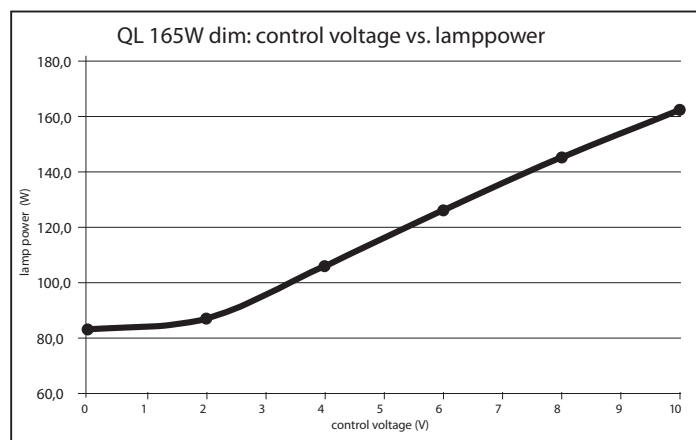

General Characteristics

Lifetime system
 Efficiency
 Cooling
 Tcase
 Storage
 Operating temp.
 Operating position
 Safety approvals
 EMC approvals

- 80.000 hrs at $T_c=72^\circ\text{C}$
- > 90%, max. load
- convection, dependent on system set-up, heat sinking required
- 82°C max (72°C for full life)
- -40°C to $+85^\circ\text{C}$
- -40°C to $+55^\circ\text{C}$ ambient
- Universal
- C-UL-US and CE
- Complies with all international EMC requirements

Electrical Characteristics

Input line freq.
 Power Factor
 Current THD
 Output Voltage
 Switching freq.
 Current nom.
 Run-up/short
 Ignition
 Dimming

- 45 - 66Hz
- > 0.98
- ANSI C82.11-2002
- 130 - 220 V_{ac}
- 2.67 MHz \pm 8%
- Depending on lamp
- $< 1.8 \times I_{nom}$
- 1.2 kVp
- EN60929, 1-10 V_{dc} analog, 50-100% output power


QL 165W System



DIMENSIONAL DRAWING

Product dimensions

Overall length C (Max)	208 mm / 8.19 inch
Length gear C3 (Norm)	190 mm
Diameter D (Max)	130 mm / 5.12 inch
Height gear H (Norm)	42.3 mm
Cable length X (Norm)	555 mm

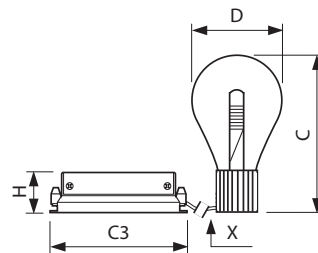

SYSTEM DATA

General Characteristics

Operating Position	Universal
Life System to 5% failures	40,000 hr
Life System to 10% failures	60,000 hr
Life System to 20% failures	80,000 hr
Life System to 50% failures	100,000 hr

Electrical Characteristics

System Power	165 W
Operating Frequency	2.650 MHz
Ignition Time	0.5 sec
Run-up time 70%	10 min
Re-ignition Time	0.5 sec

Environmental Characteristics

Mercury (Hg) Content	8.0 mg
----------------------	--------

North America
distribution and sales:

Nedap Light Controls USA
14A Industrial Way
Atkinson, NH 0381, USA
Phone: 603 458 2089
Fax: 603 458 5632
info@ql-inductionlighting.us
www.nedap-qlinduction.com

EMEA
manufacturing and sales:

QL Company B.V.
De Hoefse Weg 15
NL-5512 CH Vesseem
Phone: +31 88 1269190
Fax: +31 88 1269199
sales@qlcompany.com
www.qlcompany.com

Asia-Pacific
distribution and sales:

IMT Far East Pte. Ltd.
7500A Beach Road
The Plaza #11-318/319
Singapore 199591
Phone: +65 63415153
Fax: +65 63415150
sales@qlcompany.com