

SIG 1260

Low-voltage over-pressure single-coil lamps, railway



- Railway traffic signalling systems

Product benefits

- Narrow geometrical tolerances for safe operation of the signal installation
- Exact light centre position for optimum adjustment in the equipment
- Long lamp life time for efficient operation of signalling systems
- High reliability to avoid expensive delays to train schedules

Technical data

Electrical data

Test voltage	10 V
Nominal wattage	20 W
Nominal voltage	10 V


Light technical data

Nominal luminous flux	240 lm
-----------------------	--------


Dimensions & weight

Diameter	36.0 mm
Overall length	62.0 mm
Light center length (LCL)	33.5 mm ¹⁾

¹⁾ Distance from the coil to the lug of base

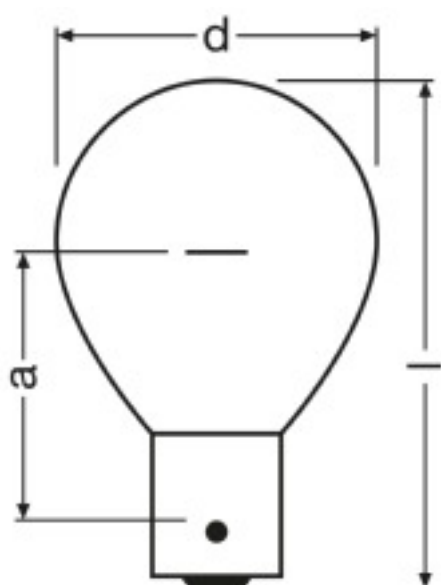

Product line drawing

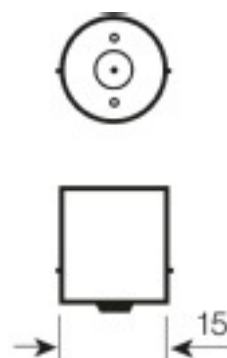

BA15s
IEC 7004-11 A
DIN 49720 T 1

IEC 7005-13
DIN 49642 T 6

Base

Lifespan

Nominal lamp life time	6000 h
------------------------	--------

Additional product data

Base (standard designation)	BA15s
Footnote used only for product	Available on request/Not for new designs

Country specific categorizations

Order reference	1260
-----------------	------

Safety advice

Use only in equipment/luminaires that are specially designed for the purpose.
Protect the lamps against moisture during operation and installation.

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300832036	Unpacked 1	80 mm x 79 mm x 195 mm	170.00 g	1.23 dm ³
4050300233079	Folding carton box 10	192 mm x 82 mm x 83 mm	176.00 g	1.31 dm ³
4050300233086	Shipping carton box 100	206 mm x 172 mm x 411 mm	1760.00 g	14.56 dm ³

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.