



## Product data

### • General Characteristics

Rated Number of Lamps	1 piece
Rated Ballast-Lamp Power	1000/1800
Rated Lamptype	SON/MH
Application code	61
Line Voltage	220-240 V
Line Frequency	50/60 Hz
Housing	SNI-115

### • Operating Characteristics

Ignition type	Semi-Parallel
Mains voltage safety (AC)	-10%/+10%
Mains voltage performance (AC)	-8%/+6%
Number of ignition pulses	1 x
Power losses gear	1.5 W
Response voltage	190 V
Maximum ignition time	160 (max) s
Ignition Voltage	5.00 (max) kV

### • Wiring Characteristics

Cable-Cap wires device/lamp	4 nF
Connector type	Screw
Striplength	6.0 mm
Wcs Ballast contacts	0.70-2.50 mm <sup>2</sup>

### • Temperature Characteristics

T-case maximum	90 (max) C
----------------	------------

T-ambient	-20 (min), 80 (max) C
T-storage	-25 (min), 80 (max) C

### • Product Dimensions

Length A1	114.5 mm
Fixing Hole Distance	95.0 mm
Length A2	
Width B1	41.0 mm
Height C1	38.0 mm
Fixing Hole Diameter D1	4.3 mm



### • Approval & Application Chars

CE marking	Yes
ENEC certificate	Yes

### • Product Data

Order code	913619569966
Full product code	913619569966
Full product name	SN 61 220-240V 50/60Hz
Order product name	SN 61 220-240V 50/60Hz
Pieces per pack	1
Packing configuration	20
Packs per outerbox	20
Bar code on pack - EAN1	8711500916396
Bar code on outerbox - EAN3	8711500907585
Logistic code(s) - 12NC	913619569966
Net weight per piece	0.066 kg

## Dimensional drawing

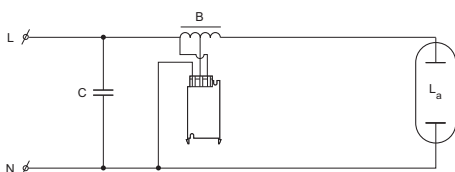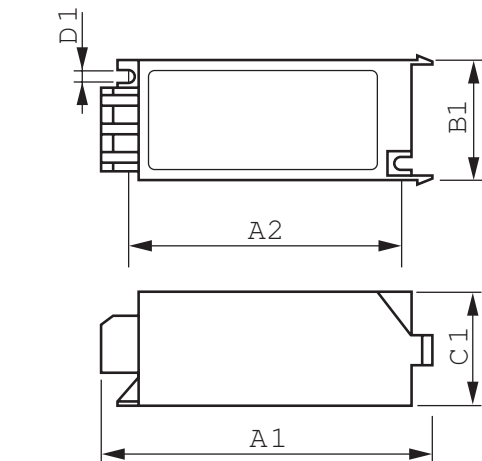

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
SN 61 220-240V 50/60Hz	114.5	95.0	41.0	38.0	4.3



© 2012 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2012, August 4  
data subject to change