



MASTER TL-D Xtra Polar

MASTER TL-D Xtra Polar 36W/830 T12 1SL

The MASTER TL-D Xtra Polar lamp offers highest light output at lower temperatures because of the insulation that is created by putting a TL-D (T8) lamp into a T10 or T12 tube. It can be used in existing luminaires for T8 lamps and is suitable for all applications in cold environments where re-lamping is costly and complex.

Product data

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Cap-Base Information	Green Plate
Bulb	T12 [38 mm]
Life to 50% failures EM	36000 hr
Life to 50% fail Preheat EL,3h	55000 hr
Life to 50% fail Nonpreh EL,3h	22000 hr
Life to 10% fail Nonpreh EL,3h	19000 hr
Life to 10% fail Preheat EL,3h	47000 hr
Life to 10% failures EM	30000 hr
LSF EM 20000h Rated,3h cycle	94 %
LSF EM 16000h Rated,3h cycle	95 %
LSF EM 12000h Rated,3h cycle	95 %
LSF EM 8000h Rated,3h cycle	96 %
LSF EM 6000h Rated,3h cycle	96 %
LSF EM 4000h Rated,3h cycle	97 %
LSF EM 2000h Rated,3h cycle	99 %

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	85 Ra8

Color Designation (text)	Warm White
Color Temperature	3000 K
Chromaticity Coordinate X	438 -
Chromaticity Coordinate Y	402 -
Luminance Average EM	1.25 cd/cm2
Lum Efficacy Rated EM 25°C	91 Lm/W
LLMF EM 20000h Rated	90 %
LLMF EM 16000h Rated	92 %
LLMF EM 12000h Rated	93 %
LLMF EM 8000h Rated	94 %
LLMF EM 6000h Rated	94 %
LLMF EM 4000h Rated	95 %
LLMF EM 2000h Rated	96 %
Luminous Flux EM 25°C, Rated	3350 Lm
Luminous Flux EM 25°C, Nominal	3350 Lm
Design Temperature	25 C

• Electrical Characteristics

Lamp Wattage	36 W
Dimmable	Yes
Lamp Current EM 25°C	0.453 A



asimpleswitch.com

PHILIPS

sense and simplicity

MASTER TL-D Xtra Polar

Lamp Wattage EM 25°C, Rated	37.0 W
Lamp Wattage EM 25°C, Nominal	37 W
Lamp Voltage EM 25°C	94 V

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	3.0 mg


• Product Dimensions

Base Face to Base Face A	1199.4 (max) mm
Insertion Length B	1204.1 (min), 1206.5 (max) mm
Overall Length C	1213.6 (max) mm
Diameter D	40.5 (max) mm

• Product Data

Order code	927982683075
Full product code	927982683075
Full product name	MASTER TL-D Xtra Polar 36W/830 T12 1SL
Order product name	MASTER TL-D Xtra Polar 36W/830 T12 1SL
Pieces per pack	1
Packing configuration	10
Packs per outerbox	10
Bar code on pack - EAN1	8711500893154
Bar code on outerbox - EAN3	8711500893161
Logistic code(s) - 12NC	927982683075
ILCOS code	FD-36/30/1B-E-G13
Net weight per piece	395.000 gr



Dimensional drawing



G13, T10/T12

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D Xtra Polar 36W/830 T12	1199.4	1204.1	1206.5	1213.6	40.5

Photometric data

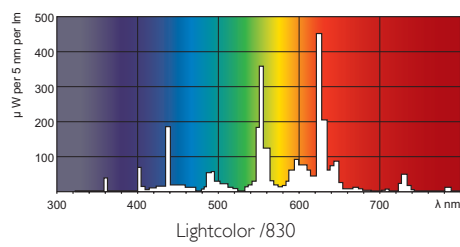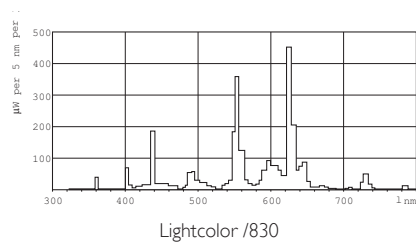

Lamps being part of this product family comply with Commission Regulation (EC) No 245/2009 – Ecodesign requirements, applicable from 13 April 2010.

1.3 Product information requirements on lamps

- a) Nominal and rated lamp wattage;
 - b) Nominal and rated lamp luminous flux;
 - c) Rated lamp efficacy at 100 h in standard conditions (25 °C, for T5 lamps at 35 °C). For fluorescent lamps both at 50 Hz (mains frequency) operation (where applicable) and at High Frequency (> 50 Hz) operation (where applicable) for the same rated luminous flux in all cases, indicating for High Frequency operation the calibration current of the test conditions and/or the rated voltage of the HF generator with the resistance. It shall be stated in a conspicuous manner that the power dissipated by auxiliary equipment such as ballasts is not included in the power consumed by the source;
 - d) Rated lamp Lumen Maintenance Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
 - e) Rated lamp Survival Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
 - f) Lamp mercury content as X.X mg;
 - g) Colour Rendering Index (Ra) of the lamp;
 - h) Colour temperature of the lamp;
 - i) Ambient temperature inside the luminaire at which the lamp was designed to maximise its luminous flux. If this temperature is equal to or lower than 0 °C or equal to or higher than 50 °C it shall be stated that the lamp is not suitable for indoor use at standard room temperatures;
 - j) For fluorescent lamps without integrated ballast, the energy efficiency index(es) of ballasts as defined in Table 17 with which the lamp can operate.
- See Table 17-EuP245.pdf for Table 17 – Energy efficiency index requirements for non-dimmable ballasts for fluorescent lamps.
For more information see: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2009:076:0017:0044:EN:PDF>



© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, November 6
data subject to change