



TL-X XL

TL-X XL 40W/33-640 1SL

Single-pin low-pressure mercury discharge lamps with a tubular 38 mm envelope

Product data

• Product Data

Order code	261373 40
Full product code	871150026137340
Full product name	TL-X XL 40W/33-640 1SL
Order product name	TL-X XL 40W/33-640 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500261373
Bar code on outerbox - EAN3	8711500261380
Logistic code(s) - 12NC	928037903332
ILCOS code	FD-40/41/2B-LC/N-Fa6
Net weight per piece	233.000 gr

• General Characteristics

Cap-Base	Fa6
Bulb	T12 [38 mm]
Life to 50% failures EM	26000 hr
Life to 10% failures EM	21000 hr

• Electrical Characteristics

Lamp Wattage	40 W
Lamp Wattage EM	39.0 W
Lamp Voltage	103 V
Lamp Current EM	0.430 A
Dimmable	yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
-------------------------------	---

Mercury (Hg) Content	8.0 mg
----------------------	--------


• Light Technical Characteristics

Colour Code	33-640
Colour Rendering Index	63 Ra8
Colour Designation	Cool White
Colour Temperature	4100 K
Chromaticity Coordinate X	377 -
Chromaticity Coordinate Y	381 -
Lamp Luminous Flux EM	2300 Lm
Lamp Luminous Efficacy EM	58 Lm/W
Lumen Maintenance 2000h	88 %
Lumen Maintenance 5000h	83 %
Lumen Maintenance 10000h	0 %
Average Luminance EM	0.59 cd/cm2


• Product Dimensions

Base Face to Base Face A	1183.5 mm
Insertion Length B	1198.5 (min), 1202 (max) mm
Overall Length C	1220.5 mm
Diameter D	40.5 mm



Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-X XL 40W/33-640	1183.5	1198.5	1202	1220.5	40.5



Photometric data

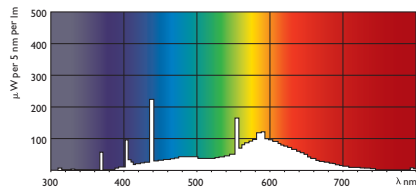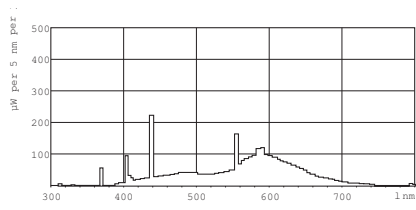

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, March 18
data subject to change