

TL5 Circular Super 80 Pro 40W/830 1CT

Product family description
16 mm tube diameter circular fluorescent
lamps with a choice of various diameters

Product Features

- Perfect circular shape
- Highly efficient 3- band fluorescent coating
- Specifically designed for operation with electronic gear
- Can be ignited from - 15° to + 50°C
- Amalgam technology

Product Benefits

- Slim 16 mm tube allows creation of extremely flat luminaires
- Allows appealing circular designs
- High lamp efficacy
- Good colour rendering

- Temperature independent light output
- Higher average system efficiency


Application

- Brings the benefits of TL5 lighting to an even wider range of attractive applications
- Suitable for a wide range of professional and semi-professional applications
- Ideal for use in shops, offices and public areas with non-traditional lay-outs
- Amalgam lamps are limited suitable for dimming applications


Product data

Order code	640970 25
Full product code	871150064097025
Full product name	TL5 Circular Super 80 Pro 40W/830 1CT
Order product name	TL5 Circular Super 80 Pro 40W/830 1CT/10
Packing type	1 Lamp in a Folding Carton
Pieces per pack	1
Packing configuration	10
Packs per outerbox	10
Bar code on pack - EAN1	8711500640970
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500640987
Logistic code(s) - 12NC	9279 655 83001 9279 655 830139279 655 83015
ILCOS code	FSCH- 40/30/1B- L/P- 2GX13- 16
Net weight per piece	0.110 (KG)
Successor order code	
Rated Lamp Wattage[W]	40W
Colour Code	830 [CCT of 3000K]
Cap- Base	2GX13
Bulb	C- T5[C- T 16mm]


Product data	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content[mg]	7.0
Colour Rendering Index[Ra8]	85
Colour Designation (text)	Warm white
Colour Temperature[K]	3000
Lamp Luminous Flux EL[Lm]	3300

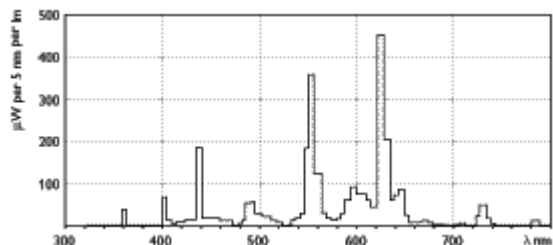


TL5 Circular Super 80 Pro/830

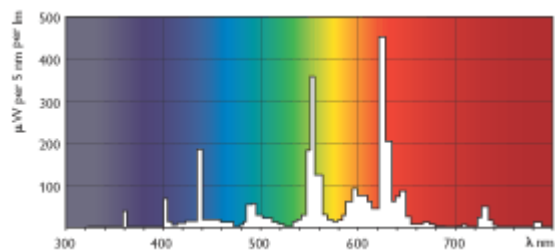

TL5 Circular Super 80 Pro/830

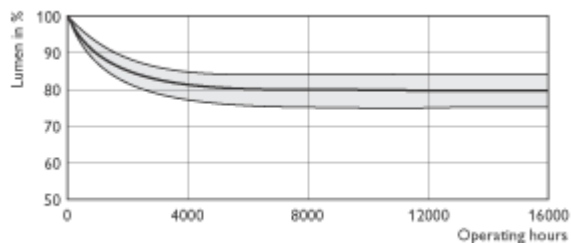

TL5 Circular Super 80 Pro

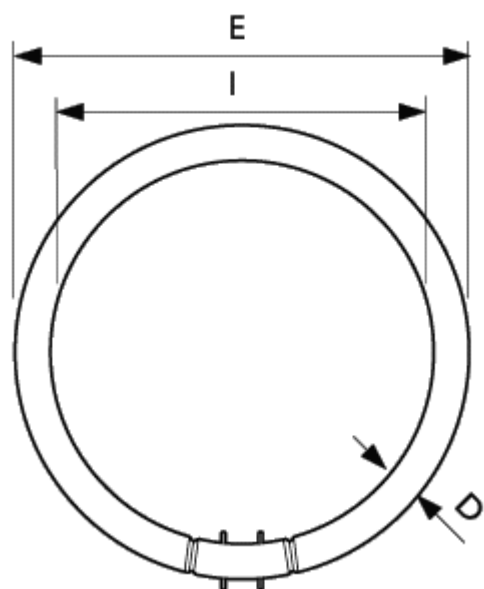

TL5 Circular Super 80 Pro

Full product name	D		E		I	
	Min	Max	Min	Max	Min	Max
TL5 Circular Super 80 Pro 40W/ 830 1CT	14	18	293	305	260	272

