



## TL- D 15W/33- 640 SLV

Product family description  
Low- pressure mercury discharge lamps  
with a tubular 26 mm envelope

### Product Features

- Standard colours with moderate colour rendering
- Available in various colour designations

### Product Benefits

- Create atmospheres from warm white to cool daylight

### Application


- Suitable for use in a wide range of luminaires for TL- D fluorescent lamps, used in applications where colour rendering is not an important factor

Product data	
Order code	702777 40
Full product code	871150070277740
Full product name	TL- D 15W/33- 640 SLV
Order product name	TL- D 15W/33- 640 SLV/25
Packing type	1 Sleeve
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500702777
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500722164
Logistic code(s) - 12NC	9280 248 03314   9280 248 03316   9280 248 03350   9280 248 03356
ILCOS code	FD- 15/41/2B- E- G13
Net weight per piece	76.000 GR
Successor order code	
Cap- Base	G13 [Medium Bi- Pin Fluorescent]
Bulb	T8 [26mm]


Product data	
Rated Lamp Wattage	15W
Energy Efficiency Label (EEL)	B
Colour Code	33- 640
Colour Rendering Index	63 Ra8
Colour Designation (text)	Cool White
Colour Temperature	4100 K
Lamp Luminous Flux EM	960 Lm




TL- D G13

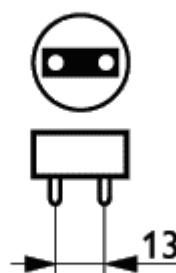


Cap- Base G13

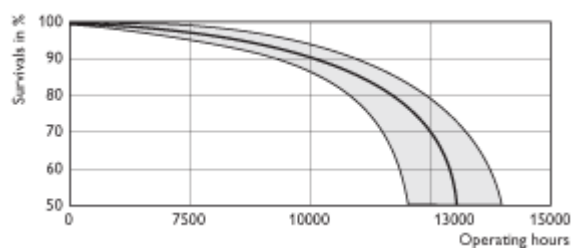


TL- D

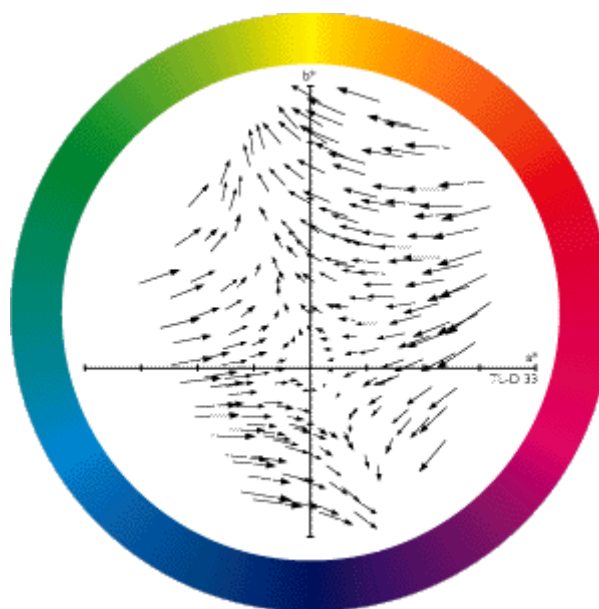


TL- D/33- 640

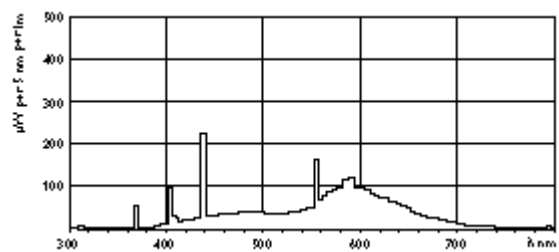

TL-D/33-640

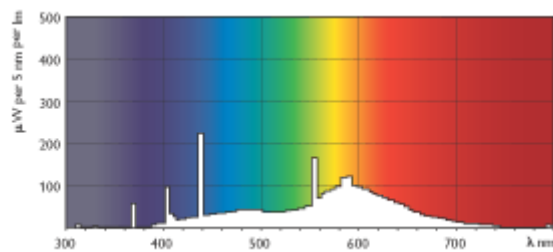

TL-D/33-640

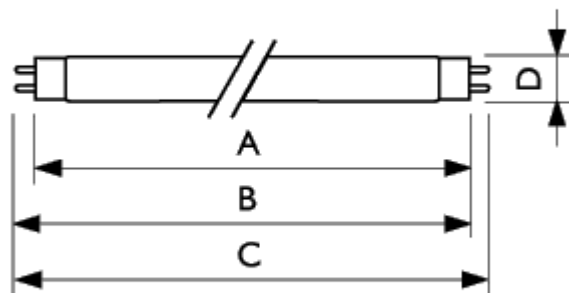

TL-D

	A	B	B	C	D
Full product name	Max	Min	Max	Max	Max
TL-D 15W/ 33-64 0 SLV	437.4	442.1	444.5	451.6	28

