



MASTER TL-D 90 Graphica

MASTER TL-D 90 Graphica 58W/950 1SL

This TL-D lamp has excellent color rendering which makes it very suitable for the graphical and printing industry to check the quality of printed material.

Product data

• General Characteristics

| | |
|--------------------------------|--|
| Cap-Base Bulb | G13 [Medium Bi-Pin Fluorescent] T8 [26 mm] |
| Life to 10% failures EM | 12000 hr |
| Life to 10% fail Preheat EL,3h | 17000 hr |
| Life to 10% fail Nonpreh EL,3h | 10000 hr |
| Life to 50% failures EM | 15000 hr |
| Life to 50% fail Preheat EL,3h | 20000 hr |
| Life to 50% fail Nonpreh EL,3h | 12000 hr |
| LSF EM 2000h Rated, 3h cycle | 99 % |
| LSF EM 4000h Rated, 3h cycle | 99 % |
| LSF EM 6000h Rated, 3h cycle | 99 % |
| LSF EM 8000h Rated, 3h cycle | 99 % |
| LSF EM 12000h Rated,3h cycle | 89 % |
| LSF EM 16000h Rated,3h cycle | 33 % |
| LSF EM 20000h Rated,3h cycle | 2 % |

• Light Technical Characteristics

| | |
|--------------------------|--------------------|
| Color Code | 950 [CCT of 5000K] |
| Color Rendering Index | 97 Ra8 |
| Color Designation (text) | Daylight |

| | |
|--------------------------------|-------------------------|
| Color Temperature | 5300 K |
| Luminous Flux EM 25°C, Rated | 3670 Lm |
| Luminous Flux EM 25°C, Nominal | 3670 Lm |
| Lum Efficacy Rated EM 25°C | 62.7 Lm/W |
| Luminance Average EM | 1.00 cd/cm ² |
| LLMF EM 2000h Rated | 93 % |
| LLMF EM 4000h Rated | 90 % |
| LLMF EM 6000h Rated | 88 % |
| LLMF EM 8000h Rated | 85 % |
| LLMF EM 12000h Rated | 82 % |
| LLMF EM 16000h Rated | 80 % |
| LLMF EM 20000h Rated | 78 % |
| Design Temperature | 25 C |
| Chromaticity Coordinate X | 340 - |
| Chromaticity Coordinate Y | 351 - |

• Electrical Characteristics

| | |
|-------------------------------|--------|
| Lamp Wattage | 58 W |
| Lamp Wattage EM 25°C, Nominal | 58 W |
| Lamp Wattage EM 25°C, Rated | 58.5 W |

MASTER TL-D 90 Graphica

Lamp Voltage EM 111 V
 25°C
 Lamp Current EM 0.670 A
 25°C
 Dimmable Yes

• Environmental Characteristics

Energy Efficiency Label (EEL) B
 Mercury (Hg) Content 3.0 mg



• Product Dimensions

Base Face to Base Face A 1500.0 (max) mm
 Insertion Length B 1504.7 (min), 1507.1 (max) mm
 Overall Length C 1514.2 (max) mm
 Diameter D 28 (max) mm

• Product Data

Order code 928045295081
 Full product code 928045295081
 Full product name MASTER TL-D 90 Graphica 58W/950 1SL
 Order product name MASTER TL-D 90 Graphica 58W/950 1SL/10
 Pieces per pack 1
 Packing configuration 10
 Packs per outerbox 10
 Bar code on pack - EAN1 8711500888754
 Bar code on outerbox - EAN3 8711500888761
 Logistic code(s) - 12NC 928045295081
 ILCOS code FD-58/53/1A-E-G13
 Net weight per piece 106.800 gr

Dimensional drawing


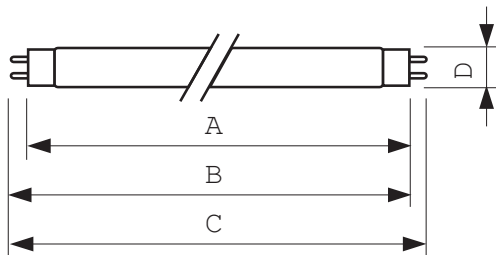


G13

MASTER TL-D 90 Graphica 58W/950 1SL

| Product | A (Max) | B (Min) | B (Max) | C (Max) | D (Max) |
|-----------------------|---------|---------|---------|---------|---------|
| TL-D Graphica 58W/950 | 1500.0 | 1504.7 | 1507.1 | 1514.2 | 28 |

Photometric data

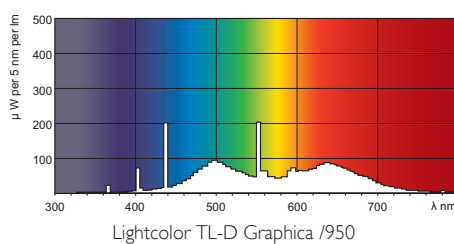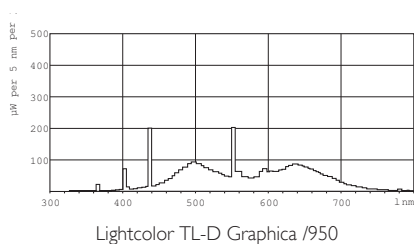



© 2013 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2013, May 9
data subject to change