



TL Rapid Start Standard Colours

TL RS 65W/33-640 1SL

Fluorescent lamps with a diameter of 38 mm

Product data

• Product Data

Order code	720634 40
Full product code	871150072063440
Full product name	TL RS 65W/33-640 1SL
Order product name	TL RS 65W/33-640 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500720634
Bar code on outerbox - EAN3	8711500720641
Logistic code(s) - 12NC	928011403371
ILCOS code	FD-65/41/2B-L/P-G13
Net weight per piece	336.600 gr

• General Characteristics

System Description	Rapid Start
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Bulb	T12 [38 mm]
Life to 50% failures EM	13000 hr

• Electrical Characteristics

Lamp Wattage	65 W
Lamp Wattage EM	64.0 W
Lamp Voltage	110 V
Lamp Current EM	0.670 A
Dimmable	yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
-------------------------------	---

Mercury (Hg) Content	8.0 mg
----------------------	--------



• Light Technical Characteristics

Colour Code	33-640
Colour Rendering Index	63 Ra8
Colour Designation	Cool White
Colour Temperature	4100 K
Chromaticity Coordinate X	377 -
Chromaticity Coordinate Y	381 -
Lamp Luminous Flux EM	4650 Lm
Lamp Luminous Efficacy EM	73 Lm/W
Lumen Maintenance 2000h	90 %
Lumen Maintenance 5000h	81 %
Lumen Maintenance 10000h	73 %
Lumen Maintenance 15000h	69 %
Average Luminance EM	0.94 cd/cm ²

• Product Dimensions



Base Face to Base Face A	1500 mm
Insertion Length B	1504.7 (min), 1507.1 (max) mm
Overall Length C	1514.2 mm
Diameter D	40.5 mm

Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL 65W/33-640 RS	1500	1504.7	1507.1	1514.2	40.5

Photometric data

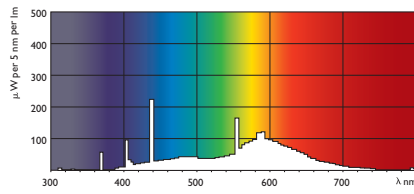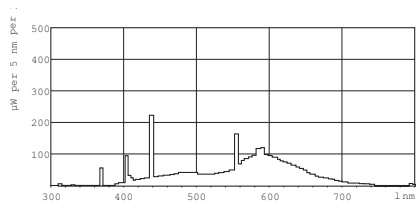

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, March 18
data subject to change