



## TUV 64T5 SP UNP

Product family description  
Low- pressure mercury vapour discharge lamps with a tubular glass envelope in the slim T5 format

### Product Features

- Emit short- wave UV radiation with a peak at 253.7 nm (UV- C) for germicidal action
- Lamp glass filters out the 185 nm ozone- forming line
- Protective inside coating limits depreciation of useful UV- C output
- High- temperature and UV- resistant lamp bases
- Warning sign on lamp indicates UV- C radiation output

### Product Benefits

- High UV- C output maintained right through to end- of- life
- Constant lamp performance over 9000 hour useful life
- No ozone generation
- Ultra- low mercury content of 5.5 mg


### Application

- Killing or inactivating bacteria, viruses and other primitive organisms
- Air, water and surface disinfection in hospitals, bacteriological research and pharmaceutical environments, and food processing industries such as dairies, breweries and bakeries
- Disinfection of drinking water, waste water, swimming pools, air conditioning systems, cold storage rooms, packing materials etc.
- Used in a variety of photochemical processes
- Radiation of these lamps is harmful to eyes and skin. Installations with these lamps are to be screened off completely.


### Product data

Order code	640796 99
Full product code	871150064079699
Full product name	TUV 64T5 SP UNP
Order product name	TUV 64T5 SP UNP/32
Packing type	Unpacked
Pieces per pack	1
Packing configuration	32
Packs per outerbox	32
Bar code on pack - EAN1	8711500640796
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500640802
Logistic code(s) - 12NC	9279 705 04099
ILCOS code	
Net weight per piece	0.156 (KG)
Successor order code	
Rated Lamp Wattage[W ]	75W
Cap- Base	SP [Single Pin]

Product data	
Packing Type	UNP [Unpacked]
Packing Configuration	32
System Description	-
Cap- Base Information	Single Pin
Bulb	T16
Main Application	Disinfection
Additional Information	ALTO
Useful Life[hr ]	9000
Product Nett Weight[gr ]	156
Technical Lamp Power[W ]	75
Lamp Voltage[V ]	176
Lamp Current[A ]	0.425
Colour Code	-
Colour Designation (text)	-
UV- C Radiation[W ]	31

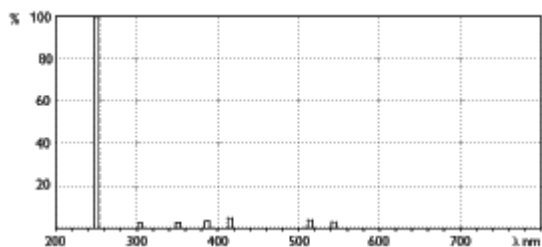

TUV

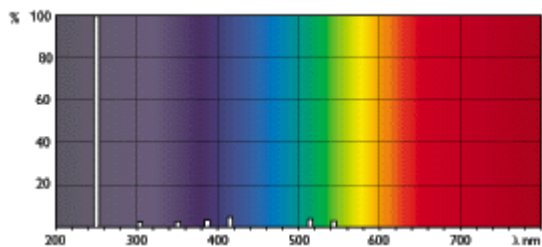

TUV

