



TUV PL- L 55W/4P HF 1CT

Product family description
Compact single- ended low- pressure
mercury vapour discharge lamps

Product Features

- Emit short- wave UV radiation with a peak at 253.7 nm (UV- C) for germicidal action
- Lamp glass filters out the 185 nm ozone- forming line
- Protective inside coating limits depreciation of useful UV- C output
- Warning sign on lamp indicates UV- C radiation output


Application

- Killing or inactivating bacteria, viruses and other


- primitive organisms
- Air, water and surface disinfection in hospitals, bacteriological research and pharmaceutical environments, and food processing industries such as dairies, breweries and bakeries
- Disinfection of drinking water, waste water, swimming pools, air conditioning systems, cold storage rooms, packing materials etc.
- Used in a variety of photochemical processes

Product data	
Order code	633798 40
Full product code	871150063379840
Full product name	TUV PL- L 55W/4P HF 1CT
Order product name	TUV PL- L 55W/4P HF 1CT/25
Packing type	1 Carton
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500633798
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500633804
Logistic code(s) - 12NC	9279 087 04007
ILCOS code	
Net weight per piece	134.000 (GR)
Successor order code	
Rated Lamp Wattage[W]	55W
Cap- Base Information	4P [4 Pins]
Additional Information	HF [High Frequency]
Packing Type	1CT [1 Carton]
Packing Configuration	25
System Description	High Frequency
Cap- Base	2G11

Product data	
Bulb	2xT16
Execution	-
Main Application	Disinfection
Useful Life[hr]	8000
Life to 50% failures EM[hr]	20000
Product Nett Weight[gr]	145
Technical Lamp Power[W]	55
Lamp Voltage[V]	103
Lamp Current[A]	0.54
Colour Code	TUV
Colour Designation (text)	-
UV- C Radiation[W]	18.0

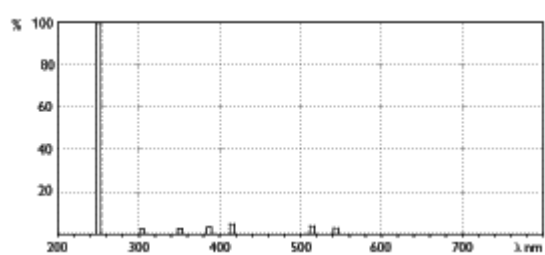

TUV PL-L

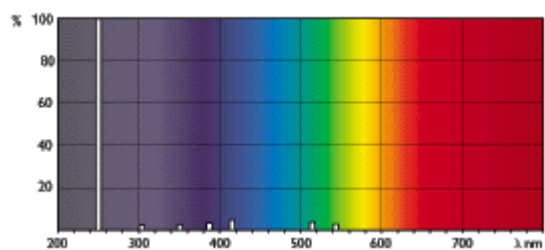

TUV PL-L

