

XBO 2000 W/HTP XL OFR

XBO Xtreme Life | Xenon short-arc lamps for cinema projection



Technical data

Electrical data

Construction wattage	2 kW
Nominal wattage	2000 W
Nominal voltage	27 V
Nominal current	70.00 A
Current control range	50...85 A


Light technical data

Nominal luminous flux	80000 lm
Luminous intensity	7500 cd ¹⁾
Luminous flux	80000 lm ¹⁾

¹⁾ Measured in the vertical burning position

Dimensions & weight

Diameter	52.0 mm
Length	375.0 mm
Mounting length	322.0 mm

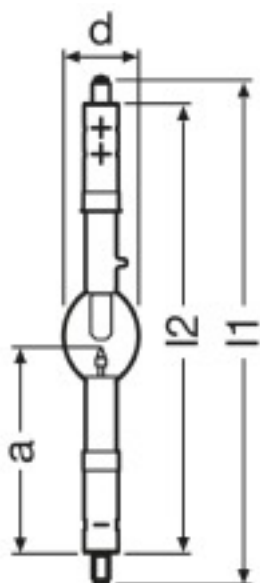

Product line drawing with letters

Lifespan

Lifespan	3500 h
----------	--------

Additional product data

Base (standard designation)	SFa25/SFc25
Arc stability, horizontal	No

Capabilities

Burning position	s30/p30 ¹⁾
------------------	-----------------------

¹⁾ For vertical burning position: anode (+) on top



Burning position

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321650429	Shipping carton box 1	- x - x -		

Disposal

The cold internal pressure of the lamp is approx. 8 bar of Xenon, the lamp must first be depressurized before it can be disposed. Place the lamp – in its protective jacket – in a plastic bag and drop it from a height of 1.0...1.5 m onto a hard surface (e.g. concrete).

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.