



# Product datasheet

## Technical data

### Electrical data


Lamp wattage	35...105 W
Line current	0.45 A
Input voltage DC	176...275 V
Power factor $\lambda$	0.95 <sup>1)</sup>
Operating frequency	40 kHz <sup>2)</sup>
Nominal output voltage	11.6 / 11.4 V <sup>3)</sup>
Nominal voltage	230...240 V
Mains frequency	50...60 Hz
System wattage	108.00 W
Max. ECG no. on circuit breaker 10 A (B)	23
Max. ECG no. on circuit breaker 16 A (B)	38
Galvanic isolation primary/secondary	4.00 kV
Inrush current	0.6 A

<sup>1)</sup> Minimum

<sup>2)</sup> Approximately

<sup>3)</sup> 105 W / 35 W

### Dimensions & weight

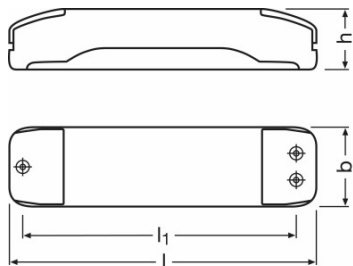

Length	170.0 mm
Width	44.0 mm
Height	34.0 mm
Wire preparation length, input side	8.0 mm
Wire preparation length, output side	8.0 mm
Mounting hole spacing, length	140.0 mm
Product weight	160.00 g

# Product datasheet

## Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Maximum temperature at tc test point	75 °C

## Additional product data

Design / version	Long with cable clamp
------------------	-----------------------

## Capabilities




Dimming method	DALI or Touch DIM/Touch DIM Sensor
Dimming interface	DALI / Touch DIM
Overload protection	Automatic reversible
Overheating protection	Automatic reversible
Short-circuit protection	Automatic reversible
Max. cable length to lamp/LED module	2.0 m
Cable/wire types, input side	H03VV-F 2x0.50 / H03VV-F 2x0.75 / H03VVH2-F 2x0.75 / H05VVH2-F 2x0.75 / H05VV-F 2x2.5 / H05VV5G 1.5 / NYM-O 2x1.5 / NYM-J 3x1.5 / NYM-J 5x1.5 mm <sup>2</sup>
Cable/wire types, output side	H03VV-F 2x0.75 / H05VV-F 2x0.75 / H05VV-F 2x1.5 / H05VV-F 2x2.5 / NYM-J 3x1.5 / NYM-J 3x2.5 / NYM-O 2x1.5 mm <sup>2</sup>
Dimmable	Yes
Dimming range	0.1...100 % <sup>1)</sup>
No-load proof	Yes

<sup>1)</sup> With AC; 1...100% with DC

## Certificates & standards










Approval marks – approval	E1 approval / VDE / VDE-EMC
Standards	Acc. to EN 55015:2006 + A1:2007/Acc. to EN 61000-3-2/Acc. to EN 61547/Acc. to EN 61347-2-2
Type of protection	IP20

## Download Data

File
 Certificates EMC-Marks approval HTi DALI 105 DIM
 Certificates ENEC-Marks approval HTi 105 DIM
 Certificates EAC HT family

## Product datasheet

---

	Certificates ENEC-Certificate HTL_HTM_HTN_HTi
	Certificates VDE-EMC-Certificate HTL_HTi Dali
	Declarations of conformity Declaration of conformity HTI DALI 105 DIM
	Installation/Operation notice Technical guide - HALOTRONIC for low-voltage halogen lamps
	Installation guide HALOTRONIC INTELLIGENT Manual
	CAD data 3-dim HTL 105230-240 and HTL 225230-240 9900052
	CAD data 3-dim HTL 105230-240 and HTL 225230-240 9900052
	CAD data 3-dim HTL 105230-240 and HTL 225230-240 9900052
	CAD data PDF HTL 105230-240 and HTL 225230-240 9900052

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321420633	HTI DALI 105/230...240 DIM	Shipping carton box 10	235 mm x 89 mm x 183 mm	3.83 dm <sup>3</sup>	1711.00 g

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.