

64653 HLX

Halogen lamps with reflector MR16



Product features

- Xenon instead of krypton as the filler gas (XENOPHOT HLX versions)
- Luminous flux up to 10 % higher with same power consumption (XENOPHOT HLX versions)



Product datasheet

Technical data

Electrical data

Nominal voltage	24 V
Nominal wattage	250.00 W


Photometrical data

Nominal luminous flux	900 lm
-----------------------	--------

Light technical data

Focal length	35.0 mm
--------------	---------

Dimensions & weight

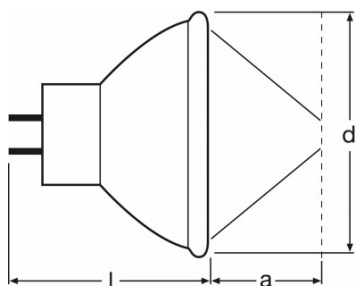

Diameter	51.0 mm
Length	44.5 mm

Lifespan

Lifespan	50 h
----------	------

Additional product data

Base (standard designation)	GX5.3
Coating	Dichroic

Capabilities

Cooling	Forced
Burning position	hs30

Certificates & standards

EEI – Energy Label	B
--------------------	---

Product datasheet


Country specific categorizations

ANSI code	ELC
LIF	A1/259
Order reference	64653 HLX EL 25

Country specific information

Product code	METEL code	SEG-No.	STK number	UK Org
4050300006826	OSRH64653HLX	-	4736553	-

Product datasheet



Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300006826	64653 HLX	Folding carton box 1	58 mm x 46 mm x 46 mm	0.12 dm ³	36.70 g
4050300946467	64653 HLX	Shipping carton box 20	238 mm x 119 mm x 106 mm	3.00 dm ³	810.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For further technical information please refer to the following OSRAM brochure:
“Technology and applications, Low-voltage tungsten-halogen lamps”
“Halogen lamps, low and medium voltage for entertainment, technical and medical applications” cross reference list

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.