

DULUX D 26 W/865

OSRAM DULUX D | CFLni, 2 tubes, with 2-pin base for CCG operation



Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

Product benefits

- Extremely economical
- Good quality of light
- Excellent luminous flux
- Long service life
- Improved maintenance

Product features

- Average life: 10,000 h
- Color rendering index R_a : 80...89
- Short and compact pin-base lamp with double-turn tubes
- Single-ended two-pin plug-in G24d base



Product datasheet

Technical data


Electrical data

| | |
|-----------------|---------|
| Nominal wattage | 26.0 W |
| Rated wattage | 26.00 W |

Photometrical data

| | |
|-------------------------------|------------------------|
| Nominal luminous flux | 1700 lm |
| Rated luminous flux | 1700 lm |
| Color temperature | 6500 K |
| Light color | 865 |
| Light color as per EN 12464-1 | LUMILUX Cool Daylight |
| Color rendering index Ra | 80...89 |
| Luminous flux at 25 °C | 1710 lm |
| Rated LLMF at 4,000 h | 0.70 |
| Rated LLMF at 6,000 h | 0.65 |
| Rated LLMF at 8,000 h | 0.59 |
| Luminance | 5.5 cd/cm ² |
| Color rendering group | 1B |

Dimensions & weight

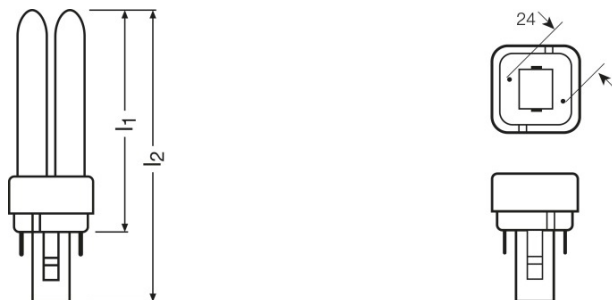

| | |
|---|-----------|
| Overall length | 172.0 mm |
| Product weight | 51.30 g |
| Tube diameter | 12 mm |
| Length | 172.0 mm |
| Length acc. to IEC standard | 160 mm |
| Length with base excl. base pins/connection | 149.00 mm |

Temperatures

Product datasheet

| | |
|--|---------|
| Rated ambient temp.w.max.luminous flux | 25.0 °C |
|--|---------|

Lifespan

| | |
|---------------------------------------|-----------------------|
| Nominal lamp life time | 10000 h |
| Rated lamp life time | 10000 h |
| Service life | 6500 h |
| Rated lamp survival factor at 2,000 h | 0.98 |
| Rated lamp survival factor at 4,000 h | 0.90 |
| Rated lamp survival factor at 6,000 h | 0.84 |
| Rated lamp survival factor at 8,000 h | 0.50 |
| Operation mode LLMF/LSF | 50 Hz |
| Lifespan | 10000 h ¹⁾ |

¹⁾ With CCG/LLCG

Additional product data

| | |
|-----------------------------------|--------|
| Base (standard designation) | G24d-3 |
| Lamp mercury content | 2.5 mg |
| Appropriate disposal acc. to WEEE | Yes |

Capabilities

| | |
|---------------------|-----|
| Suitable for indoor | Yes |
|---------------------|-----|

Certificates & standards


| | |
|-------------------------|--------------|
| Energy efficiency class | A |
| Energy consumption | 32 kWh/1000h |

Country specific categorizations

| | |
|-------|---------------------|
| ILCOS | FSQ-26/865-I-G24d-3 |
|-------|---------------------|

Product datasheet

Light Distribution

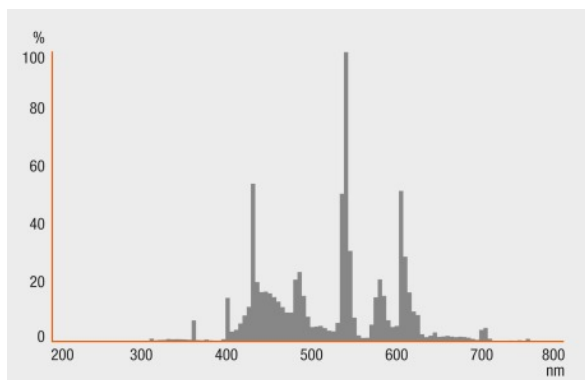

Spectral power distribution

Equipment / Accessories

- Suitable for operation on conventional control gear

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|---------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4050300194196 | DULUX D 26 W/865 | Shipping carton box 200 | 405 mm x 390 mm x 432 mm | 68.23 dm ³ | 14053.00 g |
| 4050300486987 | DULUX D 26 W/865 | Shipping carton box 10 | 192 mm x 119 mm x 155 mm | 3.54 dm ³ | 694.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Product datasheet

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.