
L 36 W/62

Colored T8 | Tubular fluorescent lamps 26 mm, with G13 bases, colored



Areas of application

- Decorative applications
- Shops
- Supermarkets and department stores
- Restaurants
- Hotels
- Accent lighting

Product benefits

- Ideal for cost-effective creative illumination and decoration
- Uniform light along the entire length of the lamp

Product features

- Average lifetime: 20,000 h with preheat ECG
- Dimmable



Product datasheet

Technical data


Electrical data

Nominal wattage	36.00 W
Rated lamp efficacy (HF data 25 °C)	Under clarification by authority and standardization body
Rated wattage	36.00 W

Photometrical data

Luminous flux at 25 °C	2300 lm
Light color	62
Light color as per EN 12464-1	Yellow
Color coordinates chromaticity diagram	0.555/0.443

Dimensions & weight

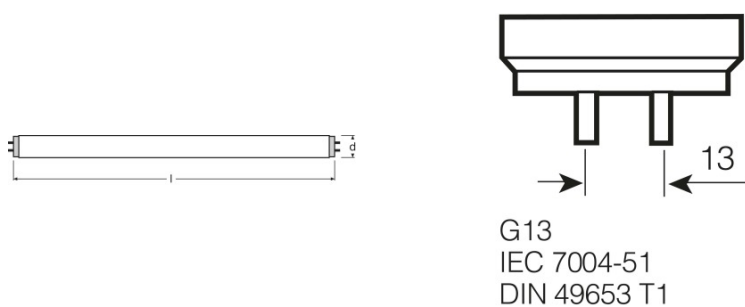

Tube diameter	26 mm
Length	1200.0 mm
Length with base excl. base pins/connection	1200.00 mm
Diameter	26.0 mm

Lifespan

Service life	18000 h ¹⁾
Lifespan	20000 h ¹⁾
Rated lamp life time	20000 h
Nominal lamp life time	20000 h

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	G13
-----------------------------	-----


Product datasheet

Lamp mercury content	2.5 mg
Appropriate disposal acc. to WEEE	Yes

Certificates & standards

Energy efficiency class	B
Energy consumption	43 kWh/1000h

Light Distribution

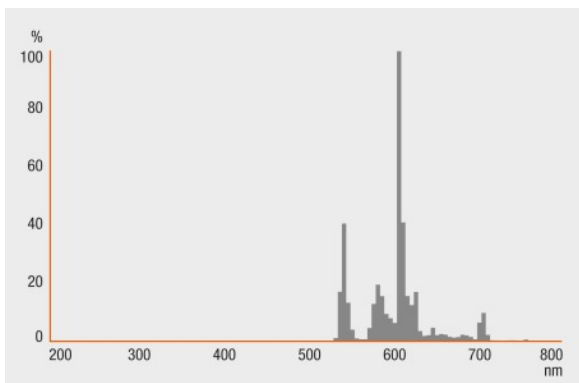

Spectral power distribution

System guarantee

OSRAM System+ Guarantee in combination with OSRAM ECGs


Product datasheet



Guarantee

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

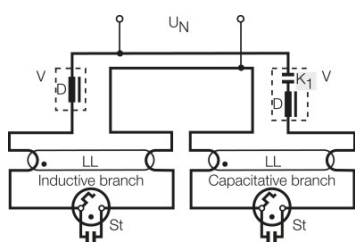

Circuit diagram

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321232724	L 36 W/62	Shipping carton box 12	1266 mm x 79 mm x 202 mm	20.20 dm ³	3147.00 g
4008321938008	L 36 W/62	Shipping carton box 10	914 mm x 470 mm x 133 mm	57.13 dm ³	3287.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

Product datasheet

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ www.osram.com/system-guarantee

For more information on QUICKTRONIC electronic control gear go to

▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.