

L 58 W/827

LUMILUX T8 | Tubular fluorescent lamps 26 mm, with G13 bases



Areas of application

- Public buildings
- Office lighting
- Industry
- Shops
- Supermarkets and department stores
- Street lighting
- Outdoor applications only in suitable luminaires

Product benefits

- Proven lamp technology
- Good economy thanks to high efficiency
- Available in many different light colors (2,700...8,000 K) for various applications

Product features

- Very good lumen maintenance: 90 % throughout the service lifetime of the lamp
- Good color rendering group: 1B (R_a : 80...89)
- Dimmable
- Top-quality three-band phosphor: LUMILUX



Product datasheet

Technical data



Electrical data

| | |
|--|---|
| Nominal wattage | 58.00 W |
| Rated lamp efficacy (HF data 25 °C) | Under clarification by authority and standardization body |
| Rated lamp efficacy (standard condition) | 90 lm/W |
| Rated wattage | 58.00 W |

Photometrical data

| | |
|--|-----------------|
| Color rendering index Ra | ≥80 |
| Rated luminous flux | 5200 lm |
| Luminous flux at 25 °C | 5200 lm |
| Light color | 827 |
| Color temperature | 2700 K |
| Nominal luminous flux | 5200 lm |
| Light color as per EN 12464-1 | LUMILUX INTERNA |
| Rated LLMF at 2,000 h | 0.95 |
| Rated LLMF at 4,000 h | 0.92 |
| Rated LLMF at 6,000 h | 0.91 |
| Rated LLMF at 8,000 h | 0.90 |
| Rated LLMF at 12,000 h | 0.89 |
| Color coordinates chromaticity diagram | 0.463/0.42 |

Dimensions & weight

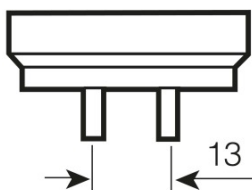

G13
IEC 7004-51
DIN 49653 T1

| | |
|---|------------|
| Tube diameter | 26 mm |
| Length | 1500.0 mm |
| Length with base excl. base pins/connection | 1500.00 mm |
| Diameter | 26.0 mm |

Product datasheet

| | |
|------------------|---------|
| Maximum diameter | 26.0 mm |
|------------------|---------|

Temperatures

| | |
|--|---------|
| Rated ambient temp.w.max.luminous flux | 25.0 °C |
|--|---------|

Lifespan

| | |
|--|-----------------------|
| Service life | 18000 h ¹⁾ |
| Lifespan | 20000 h ¹⁾ |
| Rated lamp survival factor at 2,000 h | 0.99 |
| Rated lamp survival factor at 4,000 h | 0.99 |
| Rated lamp survival factor at 6,000 h | 0.99 |
| Rated lamp survival factor at 8,000 h | 0.99 |
| Rated lamp survival factor at 12,000 h | 0.90 |
| Operation mode LLMF/LSF | 50 Hz |
| Rated lamp life time | 20000 h |
| Nominal lamp life time | 20000 h |

¹⁾ With preheat ECG

Additional product data

| | |
|-----------------------------------|--------|
| Base (standard designation) | G13 |
| Lamp mercury content | 2.5 mg |
| Appropriate disposal acc. to WEEE | Yes |


Capabilities

| | |
|---------------------|-----|
| Dimmable | Yes |
| Suitable for indoor | Yes |

Certificates & standards

| | |
|-------------------------|--------------|
| Energy efficiency class | A |
| Energy consumption | 68 kWh/1000h |

Light Distribution

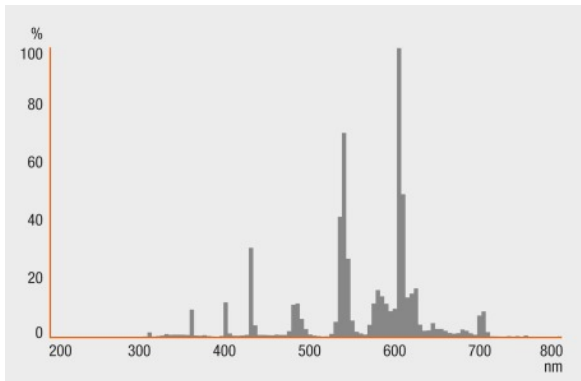

Spectral power distribution

System guarantee

OSRAM System+ Guarantee in combination with OSRAM ECGs




Guarantee

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

Product datasheet

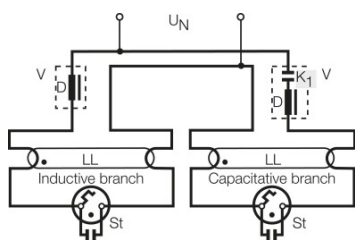

Circuit diagram

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|---------------------|---------------------------------|---|-----------------------|--------------|
| 4050300603049 | L 58 W/827 | Shipping carton box 25 | 1195 mm x 499 mm x 145 mm | 86.46 dm ³ | 6520.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit

- ▶ www.osram.com/system-guarantee

For more information on QUICKTRONIC electronic control gear go to

- ▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

L 58 W/827

LUMILUX T8 | Tubular fluorescent lamps 26 mm, with G13 bases

| Product name | Product name ECG | EAN | Nominal current | Nominal wattage + Power loss | Luminous flux at 35 °C | Number of lighting outlets |
|--------------|-----------------------|---------------|-----------------|------------------------------|------------------------|----------------------------|
| L 58W/827 | HF 1x58/230-240 DIM | 4050300297729 | 0.25 A | 58.00 W | 5000 lm | 1 |
| | HF 2x58/230-240 DIM | 4050300350998 | 0.48 A | 116.00 W | 5000 lm | 2 |
| | QT 1x58 DIM | 4008321645609 | 0.25 A | 55.70 W | 5000 lm | 1 |
| | QT 2x58 DIM | 4008321645814 | 0.48 A | 110.00 W | 5000 lm | 2 |
| | QT-FIT 5/8 1x54-58 | 4008321873828 | 0.24 A | 54.00 W | 5000 lm | 1 |
| | QT-FIT 5/8 2x54-58 | 4008321873842 | 0.48 A | 110.00 W | 5000 lm | 2 |
| | QT-FIT8 1x58-70 | 4008321294227 | 0.24 A | 54.00 W | 5000 lm | 1 |
| | QT-FIT8 2x58-70 | 4008321294289 | 0.48 A | 109.00 W | 5000 lm | 2 |
| | QTi 1x28/54/35/49 GII | 4008321383358 | 0.24 A | 55.00 W | 5000 lm | 1 |
| | QTi 1x58 DIM | | 0.25 A | 56.00 W | 5000 lm | 1 |
| | QTi 2x28/54/35/49 GII | 4008321383419 | 0.47 A | 109.00 W | 5000 lm | 2 |
| | QTi 2x58 DIM | 4050300870731 | 0.47 A | 108.00 W | 5000 lm | 2 |
| | QTi DALI 1x58 DIM | 4050300870823 | 0.25 A | 56.00 W | 5000 lm | 1 |
| | QTi DALI 2x58 DIM | 4050300870847 | 0.47 A | 108.00 W | 5000 lm | 2 |
| | QTP5 1x54 | 4008321329394 | 0.25 A | 55.00 W | 5000 lm | 1 |
| | QTP5 2x54 | 4008321329097 | 0.48 A | 109.00 W | 5000 lm | 2 |
| | QTP8 1x58 | 4008321131669 | 0.24 A | 55.00 W | 5000 lm | 1 |
| | QTP8 2x58 | 4008321131683 | 0.45 A | 110.00 W | 5000 lm | 2 |

Product datasheet

| Product name | Product name ECG | EAN | Nominal current | Nominal wattage + Power loss | Luminous flux at 35 °C | Number of lighting outlets |
|--------------|---------------------|---------------|-----------------|------------------------------|------------------------|----------------------------|
| | QTP-OPTIMAL 1x54-58 | 4008321873729 | 0.25 A | 54.00 W | 5000 lm | 1 |
| | QTP-OPTIMAL 2x54-58 | 4008321880253 | 0.25 A | 107.00 W | 5000 lm | 2 |