

## L 30 W/76 SPS

OSRAM NATURA SPLIT control T8 | Tubular fluorescent lamps 26 mm, with G13 bases, for food presentation, shatterproof



### Areas of application

- Bakeries, meat processors, butchers
- Shops
- Supermarkets and department stores
- Especially suitable for the food sector (DIN 10504)

### Product benefits

- Specially tailored spectral distribution
- Food looks fresh and appetizing without unduly "beautifying" it
- Support the implementation of the HACCP concepts from production through to presentation
- Food is ideally protected even if open luminaires are used
- Meet the requirements of the International Food Standard
- Optimal shatter protection thanks to special FEP coating



# Product datasheet

## Technical data


### Electrical data

|                                     |   |
|-------------------------------------|---|
| Nominal wattage                     | 30.0 W  |
| Rated lamp efficacy (HF data 25 °C) | Under clarification by authority and standardization body |
| Rated wattage                       | 30.00 W   |
| Rated luminous flux                 | 1260 lm   |

### Photometrical data

|                           |         |
|---------------------------|---------|
| Luminous flux at 25 °C    | 1260 lm |
| Light color               | 76      |
| Nominal luminous flux     | 1260 lm |
| Light color (designation) | NATURA  |

### Dimensions & weight

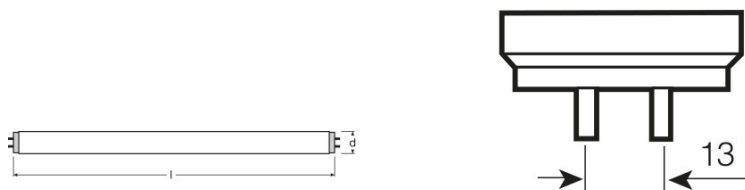

G13  
IEC 7004-51  
DIN 49653 T1

|   |           |
|---|-----------|
| Tube diameter                               | 26 mm     |
| Length                                      | 895.0 mm  |
| Length with base excl. base pins/connection | 895.00 mm |
| Diameter                                    | 26.0 mm   |

### Lifespan

|                        |                       |
|------------------------|-----------------------|
| Service life           | 10000 h <sup>1)</sup> |
| Lifespan               | 13000 h <sup>1)</sup> |
| Rated lamp life time   | 20000 h               |
| Nominal lamp life time | 20000 h               |

<sup>1)</sup> With preheat ECG

### Additional product data

## Product datasheet


|                                   |        |
|-----------------------------------|--------|
| Base (standard designation)       | G13    |
| Lamp mercury content              | 4.5 mg |
| Appropriate disposal acc. to WEEE | Yes    |

### Certificates & standards

|                         |              |
|-------------------------|--------------|
| Energy efficiency class | B            |
| Energy consumption      | 37 kWh/1000h |

### Light Distribution

---

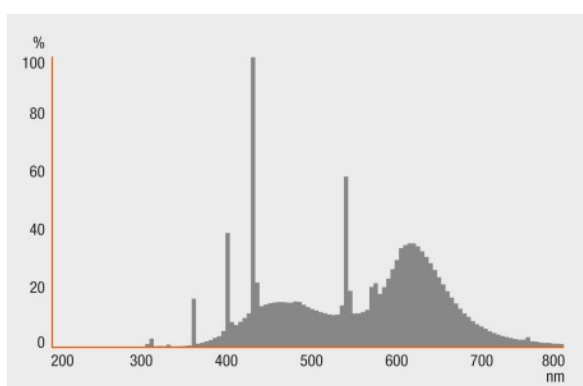

---

### Spectral power distribution

---

#### Safety advice


Lamps with plastic sleeves, ambient temperature range: -10...+80 °C

Lamps with plastic sleeves, maximum shelf life: 5 years at 0...30 °C

Lamps with plastic sleeves must be replaced after average lifetime (B50) has been reached

In case of lamp breakage: [www.osram.com/brokenlamp](http://www.osram.com/brokenlamp)

## Product datasheet

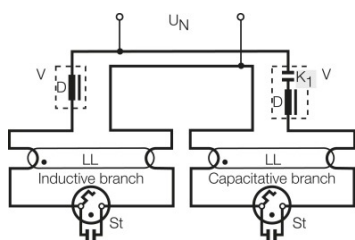

Circuit diagram

### Logistical Data

| Product code  | Product description | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume                | Gross weight |
|---------------|---------------------|---------------------------------|---|-----------------------|--------------|
| 4008321232786 | L 30 W/76 SPS       | Shipping carton box<br>12       | 966 mm x 82 mm x<br>202 mm              | 16.00 dm <sup>3</sup> | 2569.00 g    |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### References / Links

For more information on QUICKTRONIC electronic control gear go to

▶ [www.osram.com/QUICKTRONIC](http://www.osram.com/QUICKTRONIC)

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.