



# Medical Therapy Jaundice PL-L/PL-S

PL-L 18W/52/4P 1CT/25

By emitting light almost entirely within the 400 to 500 nm bandwidth these Medical Therapy Jaundice PL-L lamps have no radiation from the short wave UVB waveband. They are therefore ideal for treating new born babies suffering from hyperbilirubinemia (neonatal jaundice) and Crigler-Najjar Syndrome (CNS). Moreover, the bandwidth of these lamps peak at the most effective treatment wavelength of 450 nm. This highly efficacious phototherapy treatment has eliminated the need for blood transfusions in almost all jaundiced infants. In addition, with the compact format of this PL-L lamp equipment manufacturers have more design freedom in developing their solutions. By emitting a full spectrum of a high color temperature, the PL-L /953 lamps are ideal for treating SAD. By emitting light almost entirely within the 400 to 500 nm bandwidth these Medical Therapy Jaundice PL-L lamps have no radiation from the short wave UVB waveband. They are therefore ideal for treating new born babies suffering from hyperbilirubinemia (neonatal jaundice) and Crigler-Najjar Syndrome (CNS). Moreover, the bandwidth of these lamps peak at the most effective treatment wavelength of 450 nm. This highly efficacious phototherapy treatment has eliminated the need for blood transfusions in almost all jaundiced infants. In addition, with the compact format of this PL-L lamp equipment manufacturers have more design freedom in developing their solutions. By emitting a full spectrum of a high color temperature, the PL-L /953 lamps are ideal for treating SAD.

## Product data

### • General Information

Cap-Base

2G11 [ 2G11]

Bulb Shape

Main Application

2xT16

Medical Therapy

# PHILIPS

# Medical Therapy Jaundice PL-L/PL-S

Life To 50% Failures Preheat (Nom) 8000 h

## • Light Technical

Color Code 52  
 Luminous Flux (Nom) 330 lm  
 Lumen Maintenance 2000 h (Nom) 93 %  
 Lumen Maintenance 5000 h (Nom) 88 %  
 Chromaticity Coordinate X (Nom) 155  
 Chromaticity Coordinate Y (Nom) 75

## • Operating and Electrical

Power (Rated) (Nom) 17.5 W  
 Lamp Current (Nom) 0.375 A  
 Voltage (Nom) 57 V

## • Mechanical and Housing

Cap-Base Information 4 Pins

## • Approval and Application

Mercury (Hg) Content (Nom) 4.4 mg

## • Product Data


Full product code 872790080517800  
 Order product name PL-L 18W/52/4P 1CT/25  
 EAN/UPC - Product 8727900805178  
 Order code 927904105206  
 Numerator - Quantity Per Pack 1  
 Numerator - Packs per outer box 25  
 Material Nr. (12NC) 927904105206  
 Net Weight (Piece) 60.900 g

## Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

## Dimensional drawing

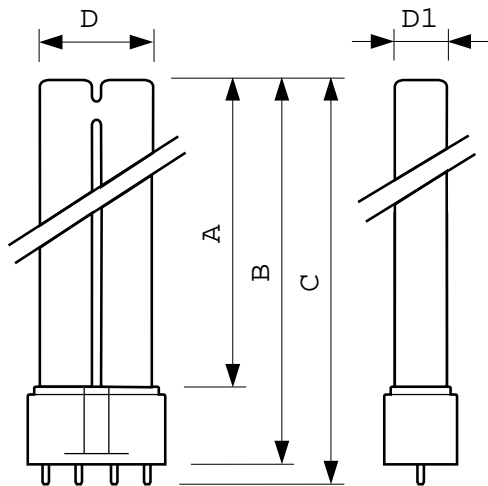

PL-L



## PL-L 18W/52/4P 219mm

Product	D1	D	A	B	C
PL-L 18W/52/4P 1CT/25	18 mm	39 mm	188.2 mm	214 mm	220.6 mm



© 2015 Philips Lighting Holding B.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, December 23  
data subject to change